

TBJ Series



CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level



Fully qualified to MIL-PRF-55365/8, the CWR11 is the military version of EIA-535BAAC, with four case sizes designed for maximum packaging efficiency on 8mm & 12mm tape for high volume production (ensuring no TCE mismatch with any substrate). This construction is compatible with a wide range of SMT board assembly processes including wave or reflow solder, conductive epoxy or compression bonding techniques. The part also carries full polarity, capacitance / voltage and JAN brand marking.


For Space Level applications, AVX SRC9000 qualification is recommended (see ratings table for part number availability).

There are four termination finishes available: solder plated, fused solder plated, hot solder dipped and gold plated (these are "H", "K", "C" and "B" termination, respectively, per MIL-PRF-55365).

The molding compound has been selected to meet the requirements of UL94V-0 (Flame Retardancy) and out-gassing requirements of ASTM E-595.

For moisture sensitivity levels please refer to the High Reliability Tantalum MSL section located in the back of the High Reliability Tantalum Catalog.

The series is qualified to MIL-PRF-55365 Weibull "B", "C", "D" and "T" levels, with all surge options ("A", "B" & "C") available.

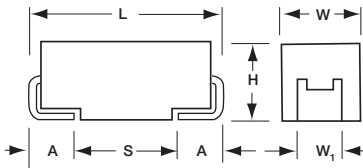

MARKING

(Brown marking on gold body)



Polarity Stripe (+)

"J" for "JAN" Brand
Capacitance Code

Rated Voltage
Manufacturer's ID

CASE DIMENSIONS: millimeters (inches)

Case Code	EIA Metric	Length (L)	Width (W)	Height (H)	Term. Width (W ₁) ±0.10 (±0.004)	Term. Length A ±0.30(±0.012)	S min
A	3216-18	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.60±0.20 (0.063±0.008)	1.20 (0.047)	0.80 (0.031)	1.80 (0.071)
B	3528-21	3.50±0.20 (0.138±0.008)	2.80±0.20 (0.110±0.008)	1.90±0.20 (0.075±0.008)	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
C	6032-28	6.00±0.30 (0.236±0.012)	3.20±0.30 (0.126±0.012)	2.50±0.30 (0.098±0.012)	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
D	7343-31	7.30±0.30 (0.287±0.012)	4.30±0.30 (0.169±0.012)	2.80±0.30 (0.110±0.012)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)

CAPACITANCE AND RATED VOLTAGE, V_R (MIL VOLTAGE CODE) RANGE CASE SIZE

Capacitance		Rated voltage DC (V _R) to 85°C							
μF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)	25V (K)	35V (M)	50V (N)
0.10	104							A	A
0.15	154							A	B
0.22	224							A	B
0.33	334						A	A	B
0.47	474					A	A	B	C
0.68	684				A	A	B	B	C
1.0	105			A	A	A	B	B	C
1.5	155		A	A	A	B	B	C	D
2.2	225	A	A	A	B	B	C	C	D
3.3	335		A	B	B	B	C	C	D
4.7	475	A	B	B	B	C	C	D	D
6.8	685	B	B	B		C	D	D	
10	106	B	B		C		D		
15	156	B	C	C		D	D		
22	226		C		D	D			
33	336	C		D	D				
47	476		D	D					
68	686	D	D						
100	107	D							

HOW TO ORDER

COTS-PLUS & MIL QPL (CWR11):

TBJ	D	686	*	006	C	□	#	@	0	^	++
Type	Case Size	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	Standard or Low ESR Range C = Std ESR L = Low ESR	Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 8 for additional packaging options.	Inspection Level S = Std. Conformance L = Group A M = MIL (JAN) CWR11	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. Z = Non-ER	Qualification Level 0 = N/A T = T Level 9 = SRC9000	Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated 7 = Matte Sn (COTS-Plus only)	Surge Test Option 00 = None 23 = 10 Cycles, +25°C 24 = 10 Cycles, -55°C & +85°C 45 = 10 cycles, -55°C & +85°C before Weibull

LEAD-FREE
LEAD-FREE COMPATIBLE COMPONENT

RoHS
COMPLIANT

For RoHS compliant products, please select correct termination style.

CWR11 P/N CROSS REFERENCE:

CWR11	D	^	686	*	@	+	□
Type	Voltage Code C = 4Vdc D = 6Vdc F = 10Vdc H = 15Vdc J = 20Vdc K = 25Vdc M = 35Vdc N = 50Vdc	Termination Finish H = Solder Plated K = Solder Fused C = Hot Solder Dipped B = Gold Plated	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level A = Non-ER	Surge Test Option A = 10 cycles, +25°C B = 10 cycles, -55°C & +85°C C = 10 cycles, -55°C & +85°C before Weibull If blank, None required	Packaging Bulk = Standard TR = 7" T&R WR = 13" T&R W = Waffle See page 8 for additional packaging options.

LEAD-FREE
LEAD-FREE COMPATIBLE COMPONENT

RoHS
COMPLIANT

For RoHS compliant products, please select correct termination style.

SPACE LEVEL OPTIONS TO SRC9000*:

TBJ	D	686	*	006	C	□	L	@	9	^	++
Type	Case Size	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Capacitance Tolerance M = ±20% K = ±10% J = ±5%	Voltage Code 004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 015 = 15Vdc 020 = 20Vdc 025 = 25Vdc 035 = 35Vdc 050 = 50Vdc	Standard or Low ESR Range C = Std ESR L = Low ESR	Packaging B = Bulk R = 7" T&R S = 13" T&R W = Waffle See page 8 for additional packaging options.	Inspection Level L = Group A	Reliability Grade Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf.	Qualification Level 9 = SRC9000	Termination Finish H = Solder Plated 0 = Fused Solder Plated 8 = Hot Solder Dipped 9 = Gold Plated	Surge Test Option 45 = 10 cycles, -55°C & +85°C before Weibull

LEAD-FREE
LEAD-FREE COMPATIBLE COMPONENT

RoHS
COMPLIANT

For RoHS compliant products, please select correct termination style.

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C									
Capacitance Range:	0.10 µF to 100 µF									
Capacitance Tolerance:	±5%; ±10%; ±20%									
Rated Voltage (V _R)	≤ 85°C:	4	6	10	16	20	25	35	50	
Category Voltage (V _C)	≤ 125°C:	2.7	4	6.7	10	13.3	16.7	23.3	33.3	
Surge Voltage (V _S)	≤ 85°C:	5.3	8	13.3	20	26.7	33.3	46.7	66.7	
Surge Voltage (V _S)	≤ 125°C:	3.5	5.3	8.7	13.3	17.8	22.2	31.1	44.5	
Temperature Range:	-55°C to +125°C									

TBJ Series

CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level

RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/8									Power Dissipation W	25°C Ripple A (100kHz)	Typical 8 Ri
				Cap @ 120Hz µF @ 25°C	DC Rated Voltage V @ +85°C	ESR @ 100kHz Ohms @ +25°C	DCL max			DF Max					
CWR11 P/N	AVX COTS-Plus P/N	AVX SRC9000 P/N	Case				+25°C (µA)	+85°C (µA)	+125°C (µA)	+25°C (%)	+85/125°C (%)	-55°C (%)			
CWR11C^225* @+□	TBJA 225 * 004 C □ # @ 0 ^ ++	TBJA 225 * 004 C □ L @ 9 ^ ++	A	2.2	4	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11C^475* @+□	TBJA 475 * 004 C □ # @ 0 ^ ++	TBJA 475 * 004 C □ L @ 9 ^ ++	A	4.7	4	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11C^685* @+□	TBJB 685 * 004 C □ # @ 0 ^ ++	TBJB 685 * 004 C □ L @ 9 ^ ++	B	6.8	4	5.5	0.5	5	6	6	9	9	0.085	0.12	0
CWR11C^106* @+□	TBJB 106 * 004 C □ # @ 0 ^ ++	TBJB 106 * 004 C □ L @ 9 ^ ++	B	10	4	4	0.5	5	6	6	9	9	0.085	0.15	0
CWR11C^156* @+□	TBJB 156 * 004 C □ # @ 0 ^ ++	TBJB 156 * 004 C □ L @ 9 ^ ++	B	15	4	3.5	0.6	6	7.2	6	9	9	0.085	0.16	0
CWR11C^336* @+□	TBJC 336 * 004 C □ # @ 0 ^ ++	TBJC 336 * 004 C □ L @ 9 ^ ++	C	33	4	2.2	1.3	13	15.6	6	9	9	0.110	0.22	0
CWR11C^686* @+□	TBJD 686 * 004 C □ # @ 0 ^ ++	TBJD 686 * 004 C □ L @ 9 ^ ++	D	68	4	1.1	2.7	27	32.4	6	9	9	0.150	0.37	0
CWR11C^107* @+□	TBJD 107 * 004 C □ # @ 0 ^ ++	TBJD 107 * 004 C □ L @ 9 ^ ++	D	100	4	0.9	4	40	48	8	12	12	0.150	0.41	0
CWR11D^155* @+□	TBJA 155 * 006 C □ # @ 0 ^ ++	TBJA 155 * 006 C □ L @ 9 ^ ++	A	1.5	6	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11D^225* @+□	TBJA 225 * 006 C □ # @ 0 ^ ++	TBJA 225 * 006 C □ L @ 9 ^ ++	A	2.2	6	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11D^335* @+□	TBJA 335 * 006 C □ # @ 0 ^ ++	TBJA 335 * 006 C □ L @ 9 ^ ++	A	3.3	6	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11D^475* @+□	TBJB 475 * 006 C □ # @ 0 ^ ++	TBJB 475 * 006 C □ L @ 9 ^ ++	B	4.7	6	5.5	0.5	5	6	6	9	9	0.085	0.12	0
CWR11D^685* @+□	TBJB 685 * 006 C □ # @ 0 ^ ++	TBJB 685 * 006 C □ L @ 9 ^ ++	B	6.8	6	4.5	0.5	5	6	6	9	9	0.085	0.14	0
CWR11D^106* @+□	TBJB 106 * 006 C □ # @ 0 ^ ++	TBJB 106 * 006 C □ L @ 9 ^ ++	B	10	6	3.5	0.6	6	7.2	6	9	9	0.085	0.16	0
CWR11D^156* @+□	TBJC 156 * 006 C □ # @ 0 ^ ++	TBJC 156 * 006 C □ L @ 9 ^ ++	C	15	6	3	0.9	9	10.8	6	9	9	0.110	0.19	0
CWR11D^226* @+□	TBJC 226 * 006 C □ # @ 0 ^ ++	TBJC 226 * 006 C □ L @ 9 ^ ++	C	22	6	2.2	1.4	14	16.8	6	9	9	0.110	0.22	0
CWR11D^476* @+□	TBJD 476 * 006 C □ # @ 0 ^ ++	TBJD 476 * 006 C □ L @ 9 ^ ++	D	47	6	1.1	2.8	28	33.6	6	9	9	0.150	0.37	0
CWR11D^686* @+□	TBJD 686 * 006 C □ # @ 0 ^ ++	TBJD 686 * 006 C □ L @ 9 ^ ++	D	68	6	0.9	4.3	43	51.6	6	9	9	0.150	0.41	0
CWR11F^105* @+□	TBJA 105 * 010 C □ # @ 0 ^ ++	TBJA 105 * 010 C □ L @ 9 ^ ++	A	1	10	10	0.5	5	6	4	6	6	0.075	0.09	0
CWR11F^155* @+□	TBJA 155 * 010 C □ # @ 0 ^ ++	TBJA 155 * 010 C □ L @ 9 ^ ++	A	1.5	10	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11F^225* @+□	TBJA 225 * 010 C □ # @ 0 ^ ++	TBJA 225 * 010 C □ L @ 9 ^ ++	A	2.2	10	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11F^335* @+□	TBJB 335 * 010 C □ # @ 0 ^ ++	TBJB 335 * 010 C □ L @ 9 ^ ++	B	3.3	10	5.5	0.5	5	6	6	9	9	0.085	0.12	0
CWR11F^475* @+□	TBJB 475 * 010 C □ # @ 0 ^ ++	TBJB 475 * 010 C □ L @ 9 ^ ++	B	4.7	10	4.5	0.5	5	6	6	9	9	0.085	0.14	0
CWR11F^685* @+□	TBJB 685 * 010 C □ # @ 0 ^ ++	TBJB 685 * 010 C □ L @ 9 ^ ++	B	6.8	10	3.5	0.7	7	8.4	6	9	9	0.085	0.16	0
CWR11F^156* @+□	TBJC 156 * 010 C □ # @ 0 ^ ++	TBJC 156 * 010 C □ L @ 9 ^ ++	C	15	10	2.5	1.5	15	18	6	9	9	0.110	0.21	0
CWR11F^336* @+□	TBJD 336 * 010 C □ # @ 0 ^ ++	TBJD 336 * 010 C □ L @ 9 ^ ++	D	33	10	1.1	3.3	33	39.6	6	9	9	0.150	0.37	0
CWR11F^476* @+□	TBJD 476 * 010 C □ # @ 0 ^ ++	TBJD 476 * 010 C □ L @ 9 ^ ++	D	47	10	0.9	4.7	47	56.4	6	9	9	0.150	0.41	0
CWR11H^684* @+□	TBJA 684 * 015 C □ # @ 0 ^ ++	TBJA 684 * 015 C □ L @ 9 ^ ++	A	0.68	15	12	0.5	5	6	4	6	6	0.075	0.08	0
CWR11H^105* @+□	TBJA 105 * 015 C □ # @ 0 ^ ++	TBJA 105 * 015 C □ L @ 9 ^ ++	A	1	15	10	0.5	5	6	4	6	6	0.075	0.09	0
CWR11H^155* @+□	TBJA 155 * 015 C □ # @ 0 ^ ++	TBJA 155 * 015 C □ L @ 9 ^ ++	A	1.5	15	8	0.5	5	6	6	9	9	0.075	0.10	0
CWR11H^225* @+□	TBJB 225 * 015 C □ # @ 0 ^ ++	TBJB 225 * 015 C □ L @ 9 ^ ++	B	2.2	15	5.5	0.5	5	6	6	9	9	0.085	0.12	0
CWR11H^335* @+□	TBJB 335 * 015 C □ # @ 0 ^ ++	TBJB 335 * 015 C □ L @ 9 ^ ++	B	3.3	15	5	0.5	5	6	6	8	9	0.085	0.13	0
CWR11H^475* @+□	TBJB 475 * 015 C □ # @ 0 ^ ++	TBJB 475 * 015 C □ L @ 9 ^ ++	B	4.7	15	4	0.7	7	8.4	6	9	9	0.085	0.15	0
CWR11H^106* @+□	TBJC 106 * 015 C □ # @ 0 ^ ++	TBJC 106 * 015 C □ L @ 9 ^ ++	C	10	15	2.5	1.6	16	19.2	6	8	9	0.110	0.21	0
CWR11H^226* @+□	TBJD 226 * 015 C □ # @ 0 ^ ++	TBJD 226 * 015 C □ L @ 9 ^ ++	D	22	15	1.1	3.3	33	39.6	6	8	9	0.150	0.37	0
CWR11H^336* @+□	TBJD 336 * 015 C □ # @ 0 ^ ++	TBJD 336 * 015 C □ L @ 9 ^ ++	D	33	15	0.9	5.3	53	63.6	6	9	9	0.150	0.41	0
CWR11J^474* @+□	TBJA 474 * 020 C □ # @ 0 ^ ++	TBJA 474 * 020 C □ L @ 9 ^ ++	A	0.47	20	14	0.5	5	6	4	6	6	0.075	0.07	0
CWR11J^684* @+□	TBJA 684 * 020 C □ # @ 0 ^ ++	TBJA 684 * 020 C □ L @ 9 ^ ++	A	0.68	20	12	0.5	5	6	4	6	6	0.075	0.08	0
CWR11J^105* @+□	TBJA 105 * 020 C □ # @ 0 ^ ++	TBJA 105 * 020 C □ L @ 9 ^ ++	A	1	20	10	0.5	5	6	4	6	6	0.075	0.09	0
CWR11J^155* @+□	TBJB 155 * 020 C □ # @ 0 ^ ++	TBJB 155 * 020 C □ L @ 9 ^ ++	B	1.5	20	6	0.5	5	6	6	9	9	0.085	0.12	0
CWR11J^225* @+□	TBJB 225 * 020 C □ # @ 0 ^ ++	TBJB 225 * 020 C □ L @ 9 ^ ++	B	2.2	20	5	0.5	5	6	6	8	9	0.085	0.13	0
CWR11J^335* @+□	TBJB 335 * 020 C □ # @ 0 ^ ++	TBJB 335 * 020 C □ L @ 9 ^ ++	B	3.3	20	4	0.7	7	8.4	6	9	9	0.085	0.15	0
CWR11J^475* @+□	TBJC 475 * 020 C □ # @ 0 ^ ++	TBJC 475 * 020 C □ L @ 9 ^ ++	C	4.7	20	3	1	10	12	6	8	9	0.110	0.19	0
CWR11J^685* @+□	TBJC 685 * 020 C □ # @ 0 ^ ++	TBJC 685 * 020 C □ L @ 9 ^ ++	C	6.8	20	2.4	1.4	14	16.8	6	9	9	0.110	0.21	0
CWR11J^156* @+□	TBJD 156 * 020 C □ # @ 0 ^ ++	TBJD 156 * 020 C □ L @ 9 ^ ++	D	15	20	1.1	3	30	36	6	8	9	0.150	0.37	0
CWR11J^226* @+□	TBJD 226 * 020 C □ # @ 0 ^ ++	TBJD 226 * 020 C □ L @ 9 ^ ++	D	22	20	0.9	4.4	44	52.8	6	9	9	0.150	0.41	0
CWR11K^334* @+□	TBJA 334 * 025 C □ # @ 0 ^ ++	TBJA 334 * 025 C □ L @ 9 ^ ++	A	0.33	25	15	0.5	5	6	4	6	6	0.075	0.07	0
CWR11K^474* @+□	TBJA 474 * 025 C □ # @ 0 ^ ++	TBJA 474 * 025 C □ L @ 9 ^ ++	A	0.47	25	14	0.5	5	6	4	6	6	0.075	0.07	0
CWR11K^684* @+□	TBJB 684 * 025 C □ # @ 0 ^ ++	TBJB 684 * 025 C □ L @ 9 ^ ++	B	0.68	25	7.5	0.5	5	6	4	6	6	0.085	0.11	0
CWR11K^105* @+□	TBJB 105 * 025 C □ # @ 0 ^ ++	TBJB 105 * 025 C □ L @ 9 ^ ++	B	1	25	6.5	0.5	5	6	4	6	6	0.085	0.11	0
CWR11K^155* @+□	TBJB 155 * 025 C □ # @ 0 ^ ++	TBJB 155 * 025 C □ L @ 9 ^ ++	B	1.5	25	6.5	0.5	5	6	6	8	9	0.085	0.11	0
CWR11K^225* @+□	TBJC 225 * 025 C □ # @ 0 ^ ++	TBJC 225 * 025 C □ L @ 9 ^ ++	C	2.2	25	3.5	0.6	6	7.2	6	9	9	0.110	0.18	0
CWR11K^335* @+□	TBJC 335 * 025 C □ # @ 0 ^ ++	TBJC 335 * 025 C □ L @ 9 ^ ++	C	3.3	25	3.5	0.9	9	10.8	6	8	9	0.110	0.18	0
CWR11K^475* @+□	TBJC 475 * 025 C □ # @ 0 ^ ++	TBJC 475 * 025 C □ L @ 9 ^ ++	C	4.7	25	2.5	1.2	12	14.4	6	9	9	0.110	0.21	0
CWR11K^685* @+□	TBJD 685 * 025 C □ # @ 0 ^ ++	TBJD 685 * 025 C □ L @ 9 ^ ++	D	6.8	25	1.4	1.7	17	20.4	6	9	9	0.150	0.33	0

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



TBJ Series

CWR11 - MIL-PRF-55365/8 Established Reliability, COTS-Plus & Space Level

RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/8									Power Dissipation	25°C Ripple	Typical
				Cap @ 120Hz @ 25°C	DC Rated Voltage @ +85°C	ESR @ 100kHz @ +25°C	DCL max			DF Max					
CWR11 P/N	AVX COTS-Plus P/N	AVX SRC9000 P/N	Case	μF @ 25°C	V @ +85°C	Ohms @ +25°C	+25°C (μA)	+85°C (μA)	+125°C (μA)	+25°C (%)	+(85/125)°C (%)	-55°C (%)	W	A (100kHz)	8 Ri (10
CWR11K^106^@+□	TBJ D 106 * 025 C □ # @ 0 ^ ++	TBJ D 106 * 025 C □ L @ 9 ^ ++	D	10	25	1.2	2.5	25	30	6	8	9	0.150	0.35	0
CWR11K^156^@+□	TBJ D 156 * 025 C □ # @ 0 ^ ++	TBJ D 156 * 025 C □ L @ 9 ^ ++	D	15	25	1	3.8	38	45.6	6	9	9	0.150	0.39	0
CWR11M^104^@+□	TBJ A 104 * 035 C □ # @ 0 ^ ++	TBJ A 104 * 035 C □ L @ 9 ^ ++	A	0.1	35	24	0.5	5	6	4	6	6	0.075	0.06	0
CWR11M^154^@+□	TBJ A 154 * 035 C □ # @ 0 ^ ++	TBJ A 154 * 035 C □ L @ 9 ^ ++	A	0.15	35	21	0.5	5	6	4	6	6	0.075	0.06	0
CWR11M^224^@+□	TBJ A 224 * 035 C □ # @ 0 ^ ++	TBJ A 224 * 035 C □ L @ 9 ^ ++	A	0.22	35	18	0.5	5	6	4	6	6	0.075	0.06	0
CWR11M^334^@+□	TBJ A 334 * 035 C □ # @ 0 ^ ++	TBJ A 334 * 035 C □ L @ 9 ^ ++	A	0.33	35	15	0.5	5	6	4	6	6	0.075	0.07	0
CWR11M^474^@+□	TBJ B 474 * 035 C □ # @ 0 ^ ++	TBJ B 474 * 035 C □ L @ 9 ^ ++	B	0.47	35	10	0.5	5	6	4	6	6	0.085	0.09	0
CWR11M^684^@+□	TBJ B 684 * 035 C □ # @ 0 ^ ++	TBJ B 684 * 035 C □ L @ 9 ^ ++	B	0.68	35	8	0.5	5	6	4	6	6	0.085	0.10	0
CWR11M^105^@+□	TBJ B 105 * 035 C □ # @ 0 ^ ++	TBJ B 105 * 035 C □ L @ 9 ^ ++	B	1	35	6.5	0.5	5	6	4	6	6	0.085	0.11	0
CWR11M^155^@+□	TBJ C 155 * 035 C □ # @ 0 ^ ++	TBJ C 155 * 035 C □ L @ 9 ^ ++	C	1.5	35	4.5	0.5	5	6	6	8	9	0.110	0.16	0
CWR11M^225^@+□	TBJ C 225 * 035 C □ # @ 0 ^ ++	TBJ C 225 * 035 C □ L @ 9 ^ ++	C	2.2	35	3.5	0.8	8	9.6	6	8	9	0.110	0.18	0
CWR11M^335^@+□	TBJ C 335 * 035 C □ # @ 0 ^ ++	TBJ C 335 * 035 C □ L @ 9 ^ ++	C	3.3	35	2.5	1.2	12	14.4	6	8	9	0.110	0.21	0
CWR11M^475^@+□	TBJ D 475 * 035 C □ # @ 0 ^ ++	TBJ D 475 * 035 C □ L @ 9 ^ ++	D	4.7	35	1.5	1.7	17	20.4	6	8	9	0.150	0.32	0
CWR11M^685^@+□	TBJ D 685 * 035 C □ # @ 0 ^ ++	TBJ D 685 * 035 C □ L @ 9 ^ ++	D	6.8	35	1.3	2.4	24	28.8	6	9	9	0.150	0.34	0
CWR11N^104^@+□	TBJ A 104 * 050 C □ # @ 0 ^ ++	TBJ A 104 * 050 C □ L @ 9 ^ ++	A	0.1	50	22	0.5	5	12	6	8	8	0.075	0.06	0
CWR11N^154^@+□	TBJ B 154 * 050 C □ # @ 0 ^ ++	TBJ B 154 * 050 C □ L @ 9 ^ ++	B	0.15	50	17	0.5	5	6	4	6	6	0.085	0.07	0
CWR11N^224^@+□	TBJ B 224 * 050 C □ # @ 0 ^ ++	TBJ B 224 * 050 C □ L @ 9 ^ ++	B	0.22	50	14	0.5	5	6	4	6	6	0.085	0.08	0
CWR11N^334^@+□	TBJ B 334 * 050 C □ # @ 0 ^ ++	TBJ B 334 * 050 C □ L @ 9 ^ ++	B	0.33	50	12	0.5	5	6	4	6	6	0.085	0.08	0
CWR11N^474^@+□	TBJ C 474 * 050 C □ # @ 0 ^ ++	TBJ C 474 * 050 C □ L @ 9 ^ ++	C	0.47	50	8	0.5	5	6	4	6	6	0.110	0.12	0
CWR11N^684^@+□	TBJ C 684 * 050 C □ # @ 0 ^ ++	TBJ C 684 * 050 C □ L @ 9 ^ ++	C	0.68	50	7	0.5	5	6	4	6	6	0.110	0.13	0
CWR11N^105^@+□	TBJ C 105 * 050 C □ # @ 0 ^ ++	TBJ C 105 * 050 C □ L @ 9 ^ ++	C	1	50	6	0.5	5	6	4	6	6	0.110	0.14	0
CWR11N^155^@+□	TBJ D 155 * 050 C □ # @ 0 ^ ++	TBJ D 155 * 050 C □ L @ 9 ^ ++	D	1.5	50	4	0.8	8	9.6	6	8	9	0.150	0.19	0
CWR11N^225^@+□	TBJ D 225 * 050 C □ # @ 0 ^ ++	TBJ D 225 * 050 C □ L @ 9 ^ ++	D	2.2	50	2.5	1.1	11	13.2	6	8	9	0.150	0.24	0
CWR11N^335^@+□	TBJ D 335 * 050 C □ # @ 0 ^ ++	TBJ D 335 * 050 C □ L @ 9 ^ ++	D	3.3	50	2	1.7	17	20.4	6	9	9	0.150	0.27	0
CWR11N^475^@+□	TBJ D 475 * 050 C □ # @ 0 ^ ++	TBJ D 475 * 050 C □ L @ 9 ^ ++	D	4.7	50	1.5	2.4	24	28.8	6	9	9	0.150	0.32	0

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [avx manufacturer](#):

Other Similar products are found below :

[MD015A222JAB](#) [M39014/220755](#) [VE17M02750K--](#) [CX2016DB16000D0GPSC1](#) [LIFE_SAMP-1A139-159V001](#) [CWR09HC106KBA](#)
[PBRC7.37MR50X000](#) [M39014/22-1137-TUBE](#) [18123A104FAT2A](#) [M39014/220778](#) [009286001203906](#) [M39014/22-1181](#) [F931A227KNC](#)
[F931C227MNC](#) [FFLI6B3007KJE](#) [12102U101JAT2A](#) [KIT5000UZ](#) [KITTYPE1400 LF](#) [LD065A332FAB2A](#) [SA205C393JAA](#)
[308016056000413](#) [SK052C105KAA](#) [SR211A151FAA](#) [F931A226MBA](#) [FFB24I0755K--](#) [CK06BX472K](#) [M39014/05-2731](#) [M39014/220476](#)
[CWR29JC476KCHC](#) [TAJB225M035R](#) [TAJC107K006RNJ](#) [TAJD226K035RNJV](#) [TCH9107M035W0055U](#) [TLCU336M004XTA](#)
[TPSA106K016R1000](#) [TPSD337K010R0150](#) [TPSE226K035R0200](#) [TWAE108K030SBEZ0000](#) [TWAE757M060CBEZ0700](#)
[KC3225K3.68640C1GE00](#) [KC7050K50.0000C10E00](#) [069296700101000](#) [07016-092MCCA](#) [TBJV157K016LBLC0024](#) [TPSE336K035R0250](#)
[TWAD108M050CBEZ0700](#) [CX2520DB16000H0FLJC1](#) [CDR14BP510EJUR](#) [RM055C825KAL360](#) [CCR05CG220FS](#)