

**JWS 75****SPECIFICATIONS**

A158-01-01A

ITEMS		MODEL	JWS75 -3	JWS75 -5	JWS75 -12	JWS75 -15	JWS75 -24	JWS75 -48	
1	Nominal Output Voltage	V	3.3	5	12	15	24	48	
2	Maximum Output Current	A	15	15	6.3	5	3.2	1.6	
3	Maximum Output Power	W	49.5	75	75.6	75	76.8	76.8	
4	Efficiency (Typ) (*1)	%	67	74	76	77	79	79	
5	Input Voltage Range (*2)	-	85 ~ 265VAC (47 ~ 63Hz) or 120 ~ 330VDC						
6	Input Current (100/200VAC)(Typ) (*1)	A	0.8/0.4	1.2 /0.6					
7	Inrush Current(Typ)	-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start						
8	PFHC	-	Built to meet EN61000-3-2						
9	Power Factor (100/200VAC)(Typ) (*1)	-	0.99/0.95						
10	Output Voltage Range	V	2.85~3.63	4.5~5.5	10.8~13.2	13.5~16.5	21.6~26.4	43.2~52.8	
11	Maximum Ripple & Noise (*3)	0 ~ +60°C	mV	120	120	150	150	150	200
		-10 ~ 0°C	mV	160	160	180	180	180	240
12	Maximum Line Regulation (*4)	mV	20	20	48	60	96	192	
13	Maximum Load Regulation (*5)	mV	40	40	96	120	150	240	
14	Temperature Coefficient	-	Less than 0.02%/°C						
15	Over Current Protection (*6)	A	15.75 ~	15.75 ~	6.61 ~	5.25 ~	3.36 ~	1.68 ~	
16	Over Voltage Protection (*7)	V	3.79~4.95	5.75~6.75	13.8~16.2	17.3~20.3	27.6~32.4	55.2~64.8	
17	Hold-up Time (Typ) (*8)	-	20ms						
18	Leakage Current (*9)	-	0.75mA MAX, 0.2mA(Typ) at 100VAC / 0.44mA(Typ) at 230VAC						
19	Remote Sensing	-	-						
20	Parallel Operation	-	-						
21	Series Operation	-	Possible						
22	Operating Temperature (*10)	-	-10 ~+60°C ( -10 ~+50°C:100%, +60°C:60%)						
23	Operating Humidity	-	30 ~ 90%RH (No dewdrop)						
24	Storage Temperature	-	-30 ~ +85°C						
25	Storage Humidity	-	10 ~ 95%RH (No dewdrop)						
26	Cooling	-	Convection Cooling						
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min						
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output - FG ... 500VDC						
29	Vibration	-	At no operating, 10 ~ 55Hz (Sweep for 1min) 19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.						
30	Shock (In package)	-	Less than 196.1m/s <sup>2</sup>						
31	Safety (*11)	-	Approved by UL1950, CSA950, EN60950,VDE0160. Built to meet DENTORI						
32	Conducted Emission	-	Built to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B.						
33	Radiated Emission	-	Built to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B.						
34	Weight(Typ.)	g	450						
35	Size (W x H x D)	mm	42 x 92 x 175 ( Refer to Outline Drawing )						

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- \*1. At 100/200VAC, Ta=25°C and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, input voltage range will be 100 ~ 240VAC(50/60Hz).
- \*3. Measure with EIAJ RC-9131 probe, Bandwise of scope :100MHz.
- \*4. 85 ~ 265VAC , constant load.
- \*5. No load-Full load, constant input voltage.
- \*6. Constant current limit with automatic recovery.
- \*7. OVP circuit will shut down output, manual reset (Line recycle).
- \*8. At 100/200VAC nominal output voltage and maximum output current.
- \*9. Measured by the each measuring method of UL,CSA,EN and DENTORI(at 60Hz).
- \*10. Ratings - Derating at standard mounting.
  - Load (%) is percent of maximum output power or maximum output current, whichever is greater.
  - As for other mountings, refer to derating curve (A158-01-02\_).
- \*11. As for DENTORI, built to meet at 100VAC.

# JWS 75 OUTPUT DERATING

NEMIC-LAMBDA

A158-01-02


## OPEN FLAME (NO COVER)

Ta (°C)	LOAD (%)			
	MOUNTING			
	A	B	C	D
-10 ~ +40	100	100	100	100
45	100	80	80	80
50	100	60	60	60
55	80	-	-	-
60	60	-	-	-

## WITH COVER (OPTION)

Ta (°C)	LOAD (%)			
	MOUNTING			
	A	B	C	D
-10 ~ +30	100	100	100	100
35	100	80	80	80
40	100	60	60	60
45	80	-	-	-
50	60	-	-	-
55	-	-	-	-

## OUTPUT DERATING CURVE (OPEN FLAME : NO COVER)

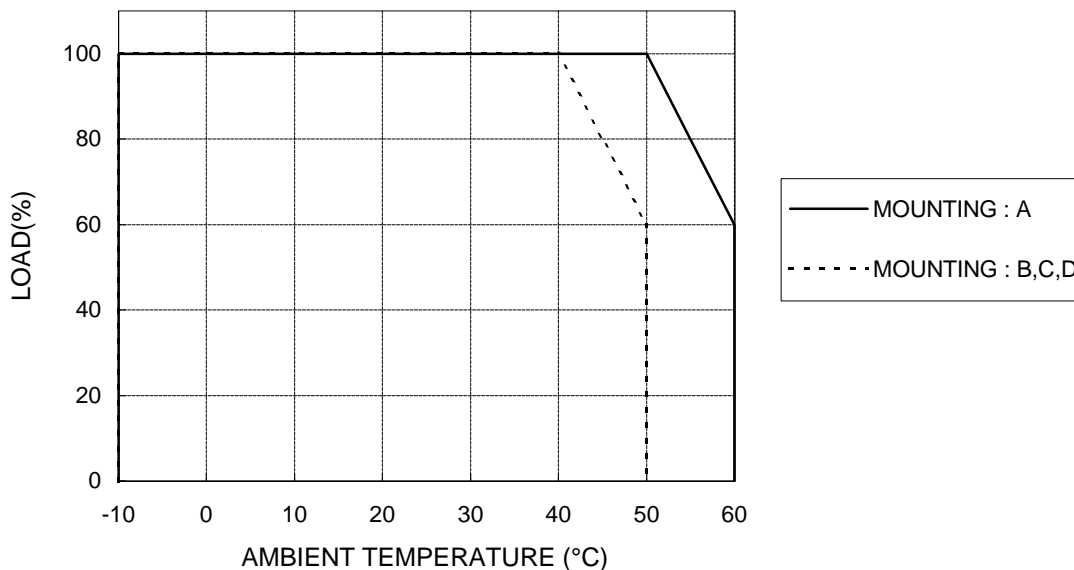

MOUNTING : A


MOUNTING : B

MOUNTING : C

MOUNTING : D

DON'T USE

(STANDARD MOUNTING)

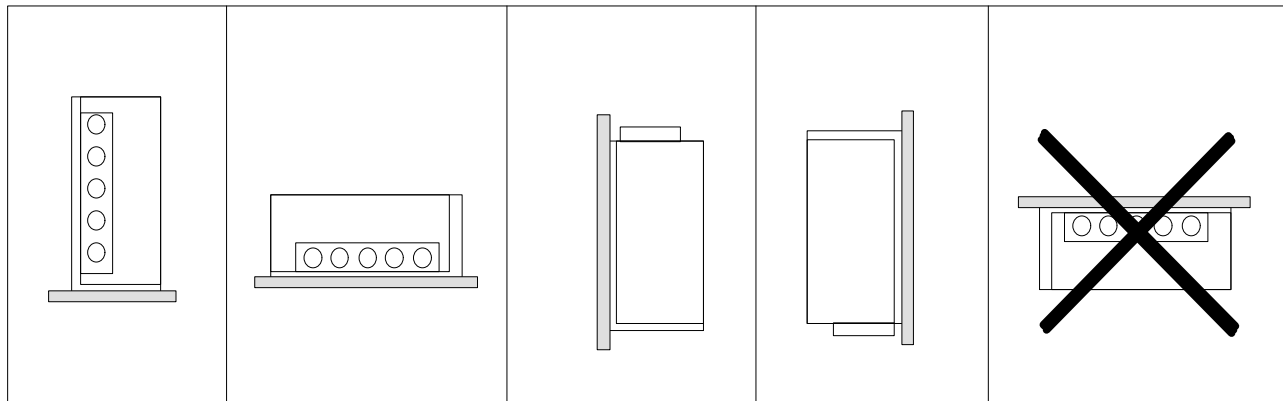

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [TDK-Lambda](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)  
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#)  
[WRB01X-U](#) [LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#)  
[LPM124-OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-](#)  
[1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-](#)  
[0065G](#) [CME240P-24](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#)