

a PennEngineering® Company


Heyco[®] Snap-In Cordgrip Strain Reliefs – Straight-Thru and Pigtail™

The Ultimate in Snap-In Strain Relief Protection For Panels from .062" (1,6 mm) to .125" (3,2 mm) Thick

WILL FIT TH Minimum Diameter		IESE CABLES Maximum Diameter		PART NO.	DESCRIPTION	PANEL DIR Or Mounting Hole		MENSIONS B To Prevent Rotation		C Max O.A. Length		Mounting Hole Plug	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	Part No.
Straight-Thru													
.210 .240	5,3 6,1	.210 .250	5,3 6,4	M4802 M4800	RSCG 500 SCG 500	<i>9</i> 1	.500	12,7	.450	11,4	1.21	30,7	2491
.210 .210	5,3 5,3	.230 .315	5,8 8,0	M4808 M4806	RSCG 625 SCG 625	<i>9</i> 7	.625	15,9	.550	14,0	1.30	33,0	2497
.230 .230	5,8 5,8	.260 .400	6,6 10,2	M4814 M4812	RSCG 750 SCG 750	977	.750	19,1	.660	16,8	1.48	37,6	2503
.255 .250	6,5 6,4	.290 .450	7,4 11,4	M4820 M4818	RSCG 875 SCG 875	<i>9</i> 7	.875	22,2	.770	19,6	1.46	37,1	2509
.300 .350	7,6 8,9	.400 .545	10,2 13,8	M4826 M4824	RSCG 1000 SCG 1000	<i>9</i> 7	1.000	25,4	.875	22,2	1.62	41,1	2713*
.385 .435	9,8 11,0	.490 .705	12,4 17,9	M4832 M4830	RSCG 1093 SCG 1093	977	1.093	27,8	.970	24,6	1.75	44,5	2723*
.385 .435	9,8 11,0	.490 .705	12,4 17,9	M4838 M4836	RSCG 1125 SCG 1125	(h)	1.125	28,6	1.000	25,4	1.75	44,5	2717
.490 .590	12,4 15,0	.785 1.000	19,9 25,4	M4844 M4842	RSCG 1250 SCG 1250	91	1.250	31,8	1.125	28,6	2.05	52,1	2740*
.490 .590	12,4 15,0	.785 1.000	19,9 25,4	M4850 M4848	RSCG 1375 SCG 1375	<i>9</i> 1	1.375	34,9	1.250	31,8	2.05	52,1	2753*
.787 .875	20,0 22,2	1.020 1.260	25,9 32,0	M4856 M4854	RSCG 1500 SCG 1500	91	1.500	38,1	1.375	34,9	2.23	56,6	2763*
.787 .875	20,0 22,2	1.020 1.260	25,9 32,0	M4862 M4860	RSCG 1750 SCG 1750	97	1.750	44,5	1.625	41,3	2.28	57,9	2773*
Pigtail													
.210 .240	5,3 6,1	.210 .250	5,3 6,4	M4902 M4900	RSCG 500-7 SCG 500-7	<i>9</i> 1	.500	12,7	.450	11,4	2.50	63,5	2491
.210 .210	5,3 5,3	.230 .315	5,8 8,0	M4908 M4906	RSCG 625-7 SCG 625-7	<i>9</i> 1	.625	15,9	.550	14,0	2.83	71,9	2497

Standard color black.

^{*}For round Mounting Hole only. For DD Mounting Hole Plug, consult Heyco.

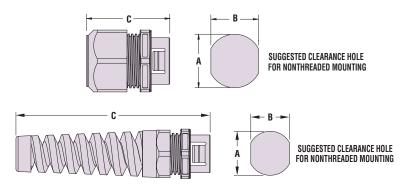

Material Certifications Nylon 6/6 w/Buna N Sealing Gland

- Recognized under Underwriters' Laboratories File E51579
- (F) Certified by Canadian Standards Association File 093876

Flammability Rating Temperature Range

-.04°F (-18°C) to 221°F (105°C)



- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Pigtail: Integral nylon spring eases the cable into a lazy bend; prevents kinking and assures longest cable and product life.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install-no tools required.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.
- Available in multiple sizes for cable diameters ranging from .210" (5,3 mm) to 1.260" (32,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Meet UL strain relief requirements without kinking the cable.
- For Foam Washers, see page 2-20.
- Though similar in appearance and function to Heyco-Tite Liquid Tight Cordgrips, Snap-in Cordgrip Strain Reliefs may not be liquid tight at the panel interface. For our complete range of Liquid Tight Cordgrips with Integral Sealing Ring, see Section 3.
- Use Heyco Mounting Hole Plugs for DD Mounting Holes, or Heyco Dome Plugs for round Mounting Holes, to fill blank/unused Mounting Holes and thus allow for a single panel design across multiple applications. See section 6.
- For Double D Mounting Hole Punches, see page 4-30.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cable Mounting & Accessories category:

Click to view products by Heyco manufacturer:

Other Similar products are found below:

HP-4N 582603-1 009333-000 727844N003 809090N001 8109 843188-000 843459N001 843460N003 8666 967279N002 GPQC1/0 DB11 1300830208 1300840039 1300900026 1300990052 1301740005 1301800121 1301800416 1300830184 1300990149 1301580036
1301720103 1301720135 1301720152 1301720157 1301740009 1301770011 1301850553 1301860939 1302000074 1302264431
1337706-2 APA18-AK MTX6UTPSRC-C 1-787307-1 185491N001 HP-6N C-202-C 202C221-13-0 OMTM-S10-C0 205339-4 CA7308000 8S23-75FR-CS8184 2684 9648 3089 988382-000 A0270164