


# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
$\nabla$ 3	B	#ENY 04/26/06 APR CODE: 04/26/06 PART NAME: SERIAL ATA POWER SUPPLY CABLE	04/26/06

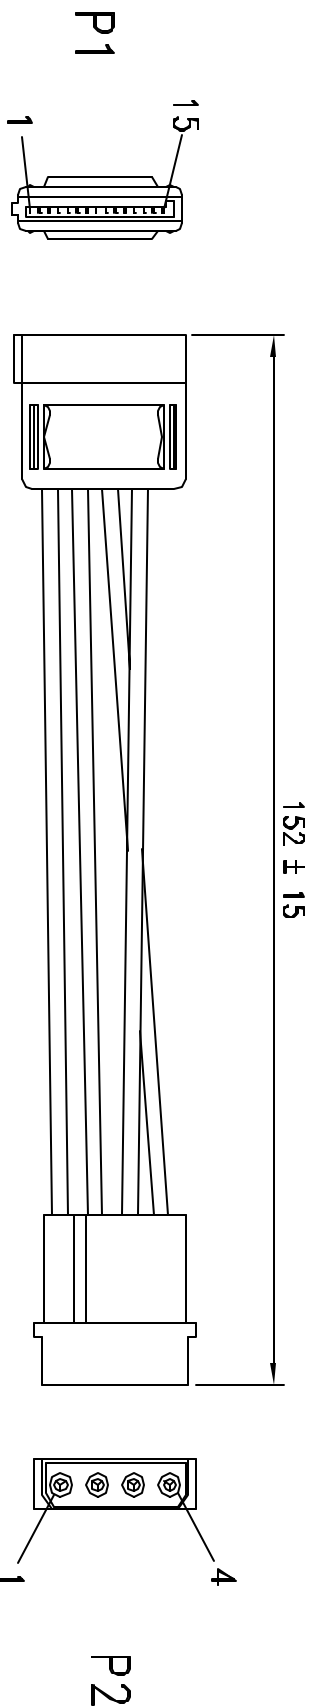

**NOTE:**

1. HOOK UP WIRE : UL1007 18AWG COLOR:YELLOW, BLACK, RED

2. CONNECTOR :

P1 : 15 PIN SATA SOCKET SOLDER TYPE GOLD PLATED 15u" CONTACT

P2 : 4 PIN MATE LOCK MALE .

HOUSING: JWT P/N: C5081HO2-4P

TERMINAL: JWT P/N: C5081TOB-2 .

P1	P2
1, 2, 3	YELLOW
4, 5, 6	BLACK
7, 8, 9	RED
10, 11, 12	BLACK

3. HOOD: P1: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4. ELECTRICAL TEST: <1>100% OPEN SHORT & MIS WIRE TEST.

<2>CONTACT RESISTANCE 3 Ohms MAX

<3>INSULATION RESISTANCE 10M Ohms MIN

5. PACKING:<1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON / ROHS LABEL(L\*W=35\*22mm)

6. EAN CODE:4260113560501



Tolerance Inch	M/M	Title
X	.015	.30
XX	.010	.10
XXX	.005	.05
Drawn		Customer P/N: CS0003
Checked		App'd
Engr		Scale
		Units
		Third Angle Projection
		Dwg No. 150-0752
		REV: B
		Sheet 1/2

**2DIREKT GMBH**

SERIAL ATA POWER SUPPLY CABLE