


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE






仅供参考图

签字: *[Signature]*

日期: *11/3/15*

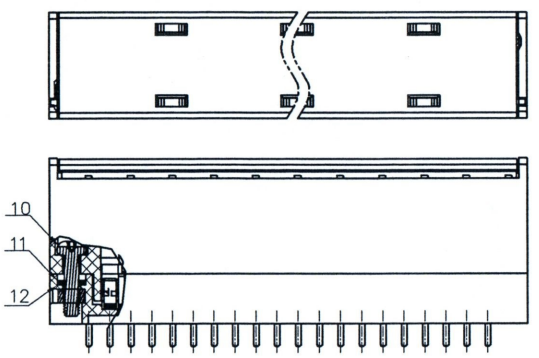

SEC B-B(PART)
7.62X(N/2-1)+18.18

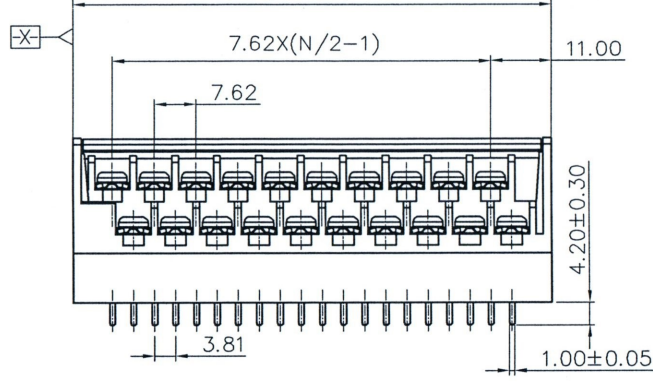

NOTES1:
UL Standard
1. Rated Voltage/Current : 300V / 14A
2. Torque Value : M3 , 4.43Lb.in
3. Wire Range : 22~14AWG

NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.62mm, Poles : N=04~48P
3. Stripping length : 6-7mm
4. Withstanding Voltage : AC1600V/1Min.
5. Operating temperature: -40°C~+105°C
6. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm				Tolerances	
TO 6	Over 6 TO 10	Over 10 TO 24	Over 24 TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10 ≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2'

7. RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
6	LONG CLAMP	COPPER ALLOY	GOLD FLASH PLATED
5	HEX NUT	STEEL	Zn Plated
4	SCREWS	STEEL	Ni Plated
3	COVER	PC	UL94V-2
2	HOUSING 1	PA66	UL94V-0
1	HOUSING	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	FINISH
13	SQUARE NUT	STEEL	Zn Plated
12	RING	STAINLESS STEEL	
11	WASHER	STEEL	Ni Plated
10	MOUNTED SCREW	STEEL	Zn Plated
9	PIN HEADER 2	COPPER ALLOY	GOLD FLASH PLATED
8	PIN HEADER 1	COPPER ALLOY	GOLD FLASH PLATED
7	SHORT CLAMP	COPPER ALLOY	GOLD FLASH PLATED

PART NO.: *1*

APPD: *Apple 10/20/15*

CHKD: *Apple 11/3/15*

DRFT: Apple 01/20/14"

THIRD ANGLE PROJECTION

宁波高松电子有限公司
DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG24B-2-XXP-1Y-00A (H)

TITLE: CUSTOMER DRAWING REV: DO-1

DRAWING NO.: DG24B-2-C01 SHEET: 1/1

MM (INCH) DO NOT SCALE DRAWING SCALE: 1:1

H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A