


PCIE-1602 PCIE-1604 PCIE-1610 PCIE-1612

2-port RS-232/422/485 PCI Express Communication Card

2-port RS-232 PCI Express Communication Card


4-port RS-232 PCI Express Communication Card

4-port RS-232/422/485 PCI Express Communication Card

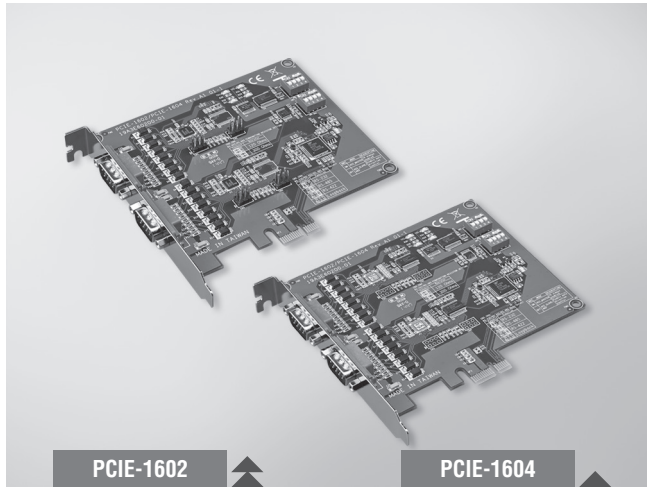

PCIE-1602

PCIE-1604

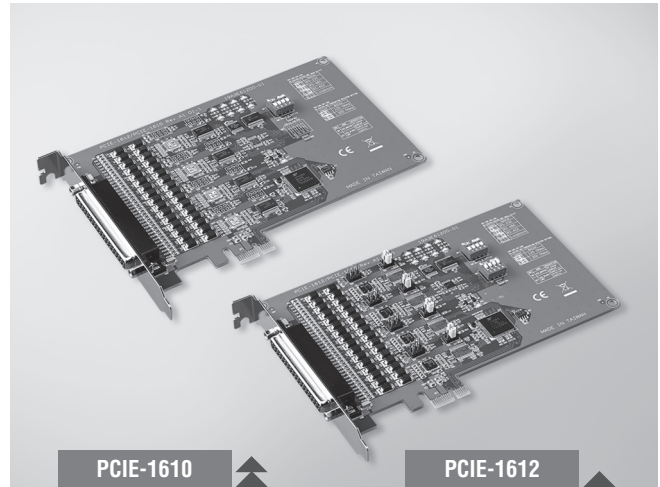

PCIE-1610

PCIE-1612



Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 2x male DB9
- **Dimensions (L x W)** 119.63 x 111 mm (4.71" x 4.4")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V352
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference SW release note to know the version of supported OS.)

Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}
PCIE-1604B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}

Ordering Information

- **PCIE-1602B-AE** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge
- **PCIE-1602C-AE** 2-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation
- **PCIE-1604B-AE** 2-port RS-232 PCI Express Comm. Card w/Surge
- **PCIE-1604C-AE** 2-port RS-232 PCI Express Comm. Card w/Surge & Isolation

Features

- PCI Express bus 2.0 compliant
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Operating systems supported: Windows 7/8/10, and Linux.
- XR17V354 UART with 256-byte FIFOs

Specifications

General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 1x Female DB37
- **Dimensions (L x W)** 168 x 111 mm (6.6" x 4.4")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V354
- **Data Bits** 5, 6, 7, 8
- **FIFO** 256 bytes
- **Parity** None, Odd, Even, Mark and Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Software

- **Bundled Software** ICOM Tools
- **OS Support** Windows 7/8/10, and Linux. (You can reference SW release note to know the version of supported OS.)

Environment

- **Operating Humidity** 5 ~ 95 % RH, non-condensing
- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}

Ordering Information

- **PCIE-1610B-AE** 4-port RS-232 PCI Express Comm. Card w/Surge
- **PCIE-1612B-AE** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge
- **PCIE-1612C-AE** 4-port RS-232/422/485 PCI Express Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

Accessories

- **OPT4A-AE** DB37 x1 to DB9 x4 Cable, 30cm
- **1700018791** DB37 x1 to DB25 x4 Cable, 30cm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)