


# PCI-1718HDU

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card

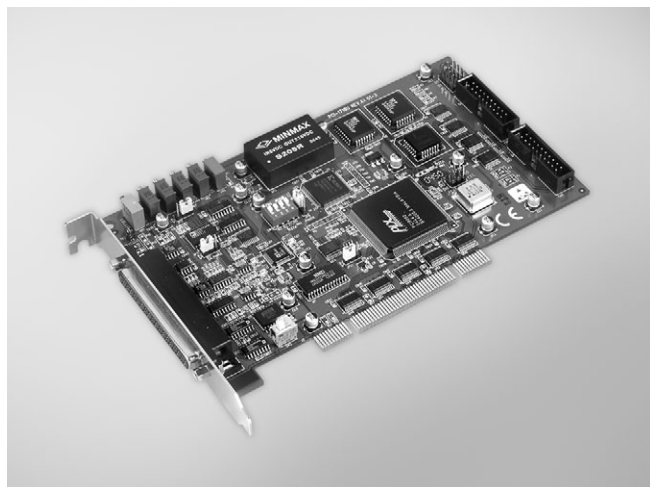

## Features

- ISA-Compatible with PCL-818HD
- 16-ch single-ended or 8-ch differential analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples)
- One 12-bit analog output channel
- 16-ch digital input and 16-ch digital output
- Universal PCI bus (support 3.3 V or 5 V PCI bus signal)
- BoardID™ switch

## Specifications

### Analog Input

- **Channels** 16 single-ended/8 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s
- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 100 M $\Omega$
- **Sampling Modes** Software, onboard or external programmable pacer
- **Input Range**

PCI-1718HDU	Unipolar	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
	Bipolar	$\pm 10$	$\pm 5$	$\pm 2.5$	$\pm 1.25$	$\pm 0.625$
<b>Accuracy (% of FSR <math>\pm 1</math>LSB)</b>	0.1	0.1	0.2	0.2	0.4	

### Analog Output

- **Channels** 1
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ 5, 0 ~ 10
External Reference		0 ~ x V @ x V (-10 $\leq$ x $\leq$ 10)

- **Slew Rate** 10 V/ $\mu$ s
- **Driving Capability** 10 mA
- **Output Impedance** 0.1 W max.
- **Operation Mode** Software polling
- **Accuracy** INLE:  $\pm 1$ LSB

### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max., Logic 1: 2 V min.

### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** Sink: 8.0 mA @ 0.8 V  
Source: -0.4 mA @ 2.0 V

### Counter/Timer

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz  
External Clock Frequency: 10 MHz

### General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x DB37 female connector  
2 x 20-pin box header
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max.: 5 V @ 1 A
- **Operating Temperature** 0 ~ 60 °C (32 ~ 140 °F)
- **Storage Temperature** -20 ~ 70 °C (-4 ~ 158 °F)
- **Operating Humidity** 5 ~ 85% RH non-condensing (refer to IEC 68-1, -2, -3)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 68-1, -2, -3)

## Ordering Information

- **PCI-1718HDU** 100 kS/s, 12-bit, 16-ch Univ. PCI Multi. Card

### Accessories

- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **ADAM-3920** 20-Pin Flat Cable Terminal, DIN-rail Mount
- **ADAM-3937** DB37 DIN-rail Wiring Board

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Data Logging & Acquisition](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[ND-6063](#) [PCI-9221](#) [PCIE-7248](#) [ND-6017](#) [PCI-7432HIR](#) [DAQe-2214](#) [PCI-9113A](#) [ND-6053](#) [ACL-8112PG](#) [cPCI-7433](#) [cPCI-6208V-GL](#)  
[DAQe-2213](#) [ND-6056](#) [DAQ-2006](#) [DAQe-2502](#) [DAQ-2208](#) [PCIE-8560](#) [DAQe-2501](#) [PCI-7233](#) [PCM-7250+](#) [PCI-8124-C](#) [ND-6060](#) [DAQ-](#)  
[2206](#) [PCM-7248+](#) [PCIE-7200](#) [PCIE-PXI-EXP-KIT](#) [PCIE-7256](#) [PCIE-1884-AE](#) [USB-4761-BE](#) [PCI-1761-BE](#) [PCI-1711UL-CE](#) [PCI-1762-BE](#)  
[RHT30](#) [TH30](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4711A-AE](#) [USB-4716-AE](#) [USB-4718-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [RHT35](#) [PCI-](#)  
[1714U-BE](#) [PCIE-1810-AE](#) [LPCIE-7250](#) [USB-4751L-AE](#) [PCI-1760U-BE](#) [PCI-6216V-GL](#) [LPCIE-7230](#) [PCI-1742U-AE](#)