


# AIMB-764



LGA 775 Core™ 2 Quad/ Core™ 2 Duo/  
Pentium® 4 / Celeron® D Processor-based  
ATX with DDR2/PCIe/Dual LAN

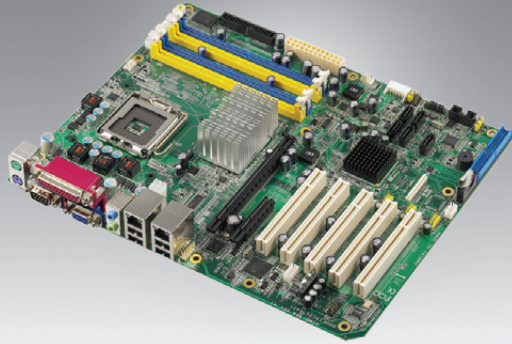

**NEW**



## Features

- Intel® Q965 533/800/1066 MHz FSB
- Supports Intel Core™ 2 Duo processor
- Dual channel DDR2 533/667/800 SDRAM up to 8GB
- PCIe16,5 SATA ports and Dual LAN
- Supports Embedded Software API and Utility


**Software APIs:**  

**Utility:**  

## Specifications

Processor System	CPU (45nm/ 65nm/ 90nm)	Intel Core 2 Quad	Core 2 Duo	Pentium dual-core	Pentium 4	Celeron D
	Max. Speed	2.66 GHz	2.8 GHz	2.2 GHz	3.8 GHz	3.06 GHz
	L2 Cache	8 MB	3 MB	1 MB	2 MB/1 MB	512 KB/ 256 KB
	Chipset	Intel Q965+ICH8DO				
	BIOS	Award 16Mbit SPI				
	Front Side Bus	533/800/1066 MHz				
Expansion Slot	PCIe x16	4.0 GB/s per direction, 1 slot				
	PCIe x4	1 GB/s per direction, 1 slot				
	PCI	32-bit/33MHz, 5 slots				
Memory	Technology	Dual channel DDR2 533/667/800 MHz				
	Max. Capacity	8 GB				
	Socket	240-pin DIMM x 4				
Graphics	Embedded	Intel GMA 3000 sharing 256 MB system memory				
	Add-on	PCIe x16 slot				
Ethernet	Interface	10/100/1000 Base-T				
	Controller	GbE LAN1 Intel 82556DM; GbE LAN2: Intel 82573L				
	Connector	RJ-45 x 2				
SATA II	Max. Data Transfer Rate	300 MB/s				
EIDE	Channel	5				
	Mode	ATA 100/66/33				
I/O Interface	Channel	1 (Max. 1 device)				
	VGA	1				
	USB	Max. 10 (USB 2.0 compliant), 4 ports on board				
	Audio	2 (MIC-In, Line-Out)				
	Serial	2 (COM2 for RS232/422/485)				
	Parallel	1 (SPP/EPP/ECP)				
	FDD	1				
	PS/2	2				
Watchdog Timer	Out put	System reset				
	Interval	Programmable 1~255 sec/ min				
Power Requirement	Typical	Intel Core 2 Duo 2.13 GHz and four 1 GB DDR2 667Mhz SDRAM				
		+12 V	+5 V	+3.3 V	5 Vsb	
		10A	4.5A	4A	1A	
Environment	Operating				Non-Operating	
	Temperature	0-55° C (32 ~ 131° F), depends on CPU's speed and cooler solution			-20 ~ 70° C (-4 ~ 158° F)	
Physical Characteristics	Dimensions (W x D)	304.8 x 244 mm (12" x 9.6")				

### Block Diagram

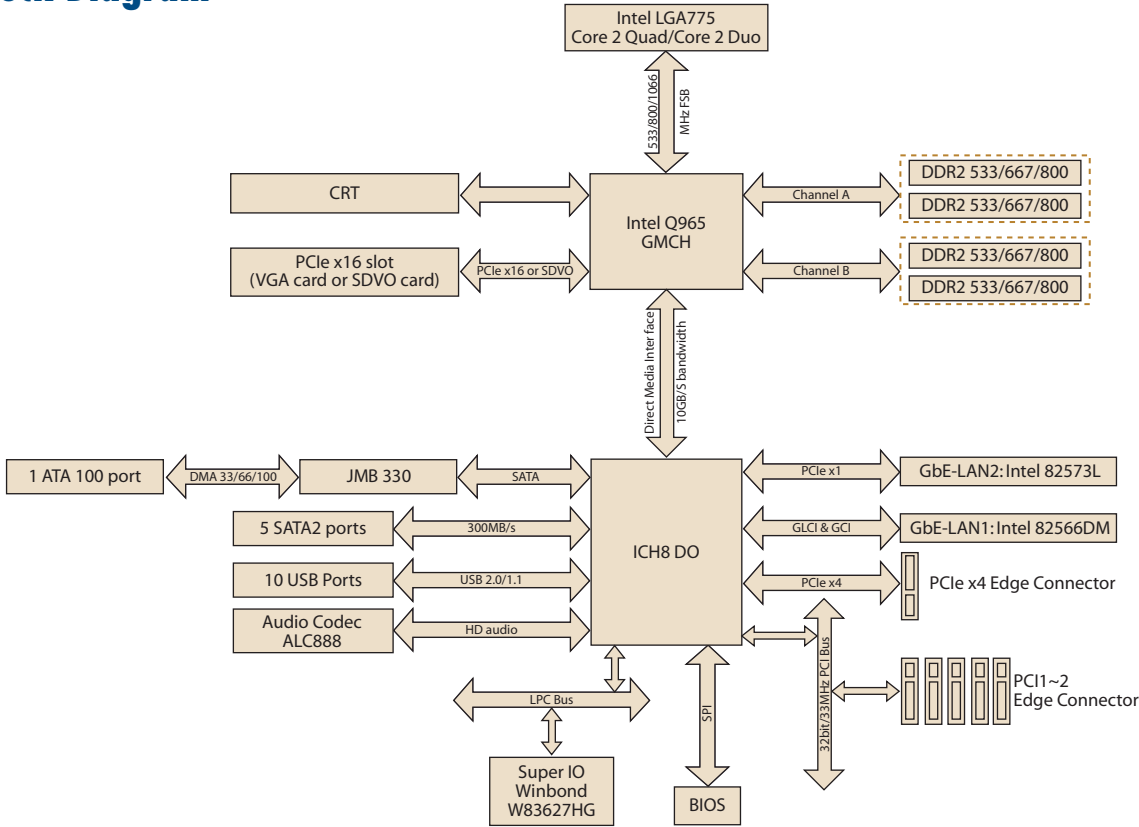

### Ordering Information

Part Number	VGA	GbE LAN
AIMB-764G2-00A1E	Yes	Dual

\*\*We strongly suggest using only Advantech's certified LGA 775 CPU coolers to ensure board reliability under harsh conditions.

### Riser Card

Part Number	Description
AIMB-R430P-03A1E	2U riser card with 3 PCI slot expansion
AIMB-R4301-03A1E	2U riser card with 3 PCIe x 1 slot expansion
AIMB-R4104-01A1E	1U riser card with 1 PCIe x 4 slot expansion
AIMB-R431F-21A1E	2U riser card with 1PClex16 & 2PClex1 slot expansion
AIMB-R43PF-21A1E	2U riser card with 1PClex16 & 2PCI slot expansion

### Bracket View



AIMB-764G2-00A1E

### Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x 2
1703150102	Serial ATA HDD power cable	x 2
1701090401	COM port cable kit	x 1
9689000068	Jumper pack	x 1
1960012533T100	I/O port bracket	x 1
-	Startup manual	x 1
-	Utility CD	x 1

### Accessories

Part Number	Description
1750001661	LGA 775 CPU Cooler for 2U chassis (supports Core 2 Duo, Pentium 4 max. 3.4 GHz, and Celeron D processors)
1750000334	LGA 775 CPU Cooler for 4U+ chassis (supports Core 2 Duo, Pentium 4 and Celeron D processor)
1700002314	USB cable with four ports, 30.5cm
1700002204	USB cable with dual ports, 27cm
1700003195	USB cable with dual ports, 17.5cm

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN](#) [AmITX-SL-G-Q170](#) [IB100](#) [MVME61006E-2173R](#) [20-101-0738](#) [PCE-4128G2-00A1E](#)  
[RSB-4220CS-MCA1E](#) [SHB230DGGA-RC](#) [IB909AF-5650](#) [PICO841VGA-E3827](#) [IMB210VGGA](#) [MI981AF](#) [RSB-4221CS-MCA1E](#) [PCE-](#)  
[9228G2I-00A1E](#) [IB915F-3955](#) [IB909F-5010](#) [MI958F-16C](#) [Nitrogen7](#) [UPS-P-8G-64GB-PACK](#) [S2600WFT](#) [IB915AF-6300](#) [S2600STB](#)  
[BBS2600BPS](#) [IB915F-6100](#) [Nit6QP\\_MAX](#) [MI990VF-X28-E](#) [MI990VF-6820](#) [94AC6636](#) [BANANA PI BPI-M4](#)  
[BLKNUC7I3DNHNC1978015](#) [BLKNUC7I5DNK1E 960791](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#) [94AC6633](#) [A33-OLINUXINO-](#)  
[N8G](#) [A64-OLINUXINO-1GE16GW](#) [A20-SOM-E16GS16M](#) [A20-SOM204-1G-M](#) [EMB-APL1-A10-3350-F1-LV](#) [PICO-APL1-A10-F001](#)  
[PICO-APL4-A10-F003](#) [ODYSSEY - STM32MP157C BOARD WITH SOM](#) [BEAGLEBONE GREEN GATEWAY DEV BOARD](#) [ODYSSEY](#)  
[- X86J4105864 8GB RAM 64GB EMMC](#) [ODYSSEY -X86J4105864 8GB/64GB ENTERPRISE](#) [VISIONDK-STM32MP1 V.1.0](#) [VISIONDK-](#)  
[6ULL V.2.0](#) [VISIONDK-8MMINI V.1.0](#) [VISIONDK-RT](#)