


PCIE-1672E PCIE-1674E

2-port PCI Express GigE Vision Frame Grabber

4-port PCI Express GigE Vision Frame Grabber

NEW

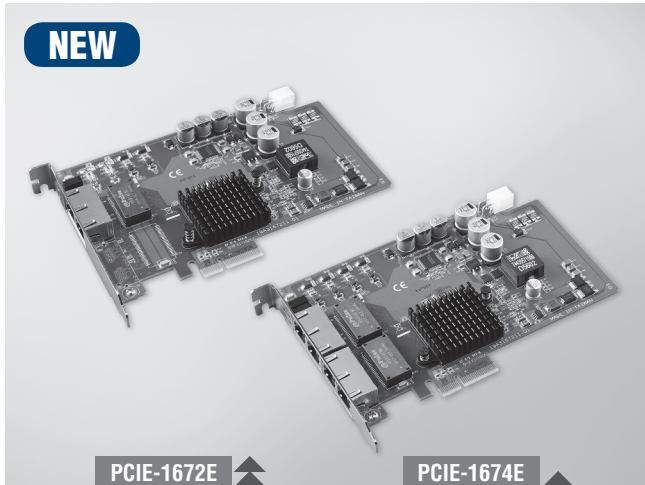

Features

- Intel® server-grade GbE Mac Controller
- PCI Express® x4 compliant
- PoE power from PCIe slot (Total Max. 18W)
- Powered Device (PD) auto detection and classification
- Supports IEEE 802.3u Auto-Negotiation
- Supports Jumbo frame (9,500 byte) and link aggregation
- Supports IEEE-1588 and IEEE-802.1 AS

Introduction

The PCIE-1672E/PCIE-1674E PoE (Power over Ethernet) PCIe series is PCI express Network Interface Card which supports 2 or 4 independent 10/100/1000BaseT(X) 802.3af (PoE) compliant Ethernet ports. With 12 VDC AT/ATX power input, the PCIE-1672E/PCIE-1674E can boost then provides up to 15.4 watts at 48 VDC power to maximum 2 or 4 x PoE ports on each module. It allows power to be supplied to connected devices, such as PoE-based GigE cameras in machine vision inspection systems, without the need to use separate PoE injectors for those applications. The PCIE-1672E/PCIE-1674E is ideally designed for scientific research instrumentations, Medical Research Instrumentations, Machine Vision System, which can also benefit from a scalable Gigabit backbone construction with Power-over-Ethernet support.

Specifications

Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u, IEEE802.3ab, IEEE802.3x, IEEE802.3af
- **Speed** 10/100/1000 Mbps
- **No. of Ports** 2 or 4 Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.
- **Port Connector** 8-pin RJ45
- **Bus Interface** PCI Express® x4 compliant

Protection

- **ESD** 8KV (air), 4KV (contact)
- **EFT** 2 KV
- **Surge Protection** 1 KV

Power Requirements

- **Input Voltage** 12 V_{DC} direct from PCIe slot, or AT/ATX System power input
- **Overload Current Protection** Present
- **Connection** AT/ATX Power Jack
- **Output PoE Power** 48 V_{DC} PoE Power output, total Max. 18W (total Max. 60W with AT/ATX System power input)

Environment

- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 5 ~ 95% RH

Mechanics

- **Dimensions (W x D)** 185 x 110 mm (7.3" x 3.9")

Certification

- **Patent** <http://www.advantech.com/legal/patent>

Ordering Information

- **PCIE-1672E-AE** 2-port PCI Express GigE Vision Frame Grabber
- **PCIE-1674E-AE** 4-port PCI Express GigE Vision Frame Grabber

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Video Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[conga-HDMI ADD2 Card](#) [DVP-7016HE](#) [PCIe-CPL64](#) [PCIe-GIE72](#) [LI-USB30-IMX290](#) [LI-OV9712-USB-M12](#) [DVP-7634HE](#) [DVP-7011HE](#)
[96VG-2G-PE-MA2](#) [CAMOV5645](#) [PCIe-GIE74 PRO](#) [70112 E112 H.264](#) [70011](#) [70020](#) [106681](#) [107654](#) [107402](#) [2000034835](#) [2000035612](#)
[2000035614](#) [2000036376](#) [PCA-5650-00A1E](#) [LI-OV2640-USB-M7](#) [MIPI 5MP IR AF Camera](#) [PCIe-2602](#) [2000036378](#) [106732](#) [LI-TX1-CB-](#)
[IMX185M12-D](#) [M13B0618WR5](#) [LI-USB30-OV10640-490](#) [LI-USB30-AR023ZWDR](#) [LI-USB30-V034M](#) [LI-USB30-OV13850](#) [LI-USB30-](#)
[M021C](#) [LI-OV7251M-FF-80](#) [LI-OV580-STEREO](#) [LI-OV5640-USB-AF](#) [LI-OV5640-USB-65](#) [LI-OV2640-USB-M6](#) [LI-IMX274-MIPI-M12](#)
[LI-IMX274MIPI-FMC](#) [LI-IMX274-MIPI-CS](#) [LI-IMX185-MIPI-M12](#) [LI-FAW-1212-T1](#) [DVP-7630HE](#) [LI-OV5640-MIPI-AF-NIR](#) [DVP-](#)
[7637E](#) [DVP-7635E](#) [DVP-7633E](#) [DVP-7030HE](#)