

# Ceramic SMD Automotive Grade Crystal

Model: FXA7050B Series

RoHS Compliant

Rev. 5/28/2010

Page 1 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



## FEATURES

- Meets AEC-Q200 Requirements
- Fundamental to 48 MHz
- Temperatures to -40°C ~ +125°C
- Seam Seal
- Tape and Reel (1,000 pcs. STD)

• PART NUMBER		
Part Number	Model Number	Frequency Range (MHz)
825B-Frequency-xxxxx	FXA7050B	6.000 ~ 48.000 MHz


• STANDARD SPECIFICATIONS	
PARAMETERS	MAX (unless otherwise noted)
Frequency	6.000 ~ 48.000 MHz
Frequency Tolerance @ 25°C	±50 PPM <sup>1</sup>
Frequency Stability, ref @ 25°C	±100 PPM <sup>1</sup> ±50 PPM <sup>1</sup> (Customer Specified)
-40 ~ +125°C	
-40 ~ +85°C	
Temperature Range	-40°C ~ +125°C -55°C ~ +150°C
Operating (TOPR)	
Storage (TSTG)	
Shunt Capacitance (Co)	7pF
Load Capacitance (CL)	10pF~Series (Customer Specified)
Drive Level	100µW
Aging per year	±3 PPM
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au
Seal Method	Seam Seal

<sup>1</sup>Other tolerances and stabilities available. Contact Fox Technical Support for specific requirements.

Frequency Range (MHz)	Operating Mode	Max ESR Ω
6.000000 ~ 10.000000	Fundamental	110
10.000001 ~ 12.000000	Fundamental	60
12.000001 ~ 20.000000	Fundamental	50
20.000001 ~ 48.000000	Fundamental	40

Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary.

The above specifications, having been carefully prepared and checked, are believed to be accurate at the time of publication; however, no responsibility is assumed by Fox Electronics for inaccuracies. All specifications subject to change without notice.

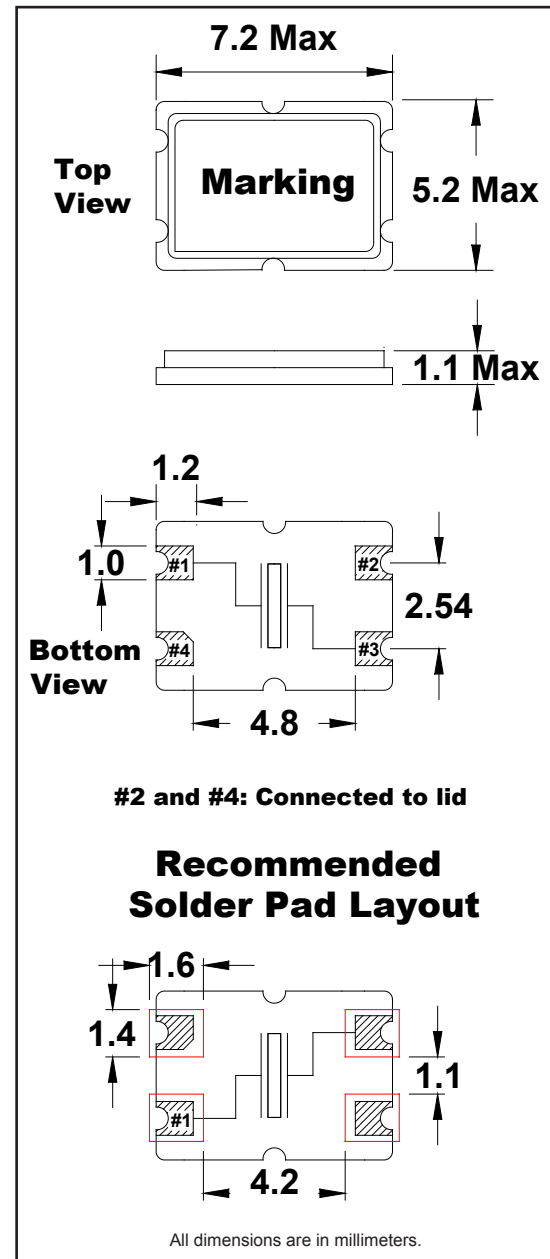

# Ceramic SMD Automotive Grade Crystal

Model: FXA7050B Series

RoHS Compliant

Rev. 5/28/2010


Page 2 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
FXA7050B	∅1.5	4.0	8.0	7.5	16.0	2.0	1,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
FXA7050B	2.0	∅13	∅21	∅62.0	∅180	16.2	1.6

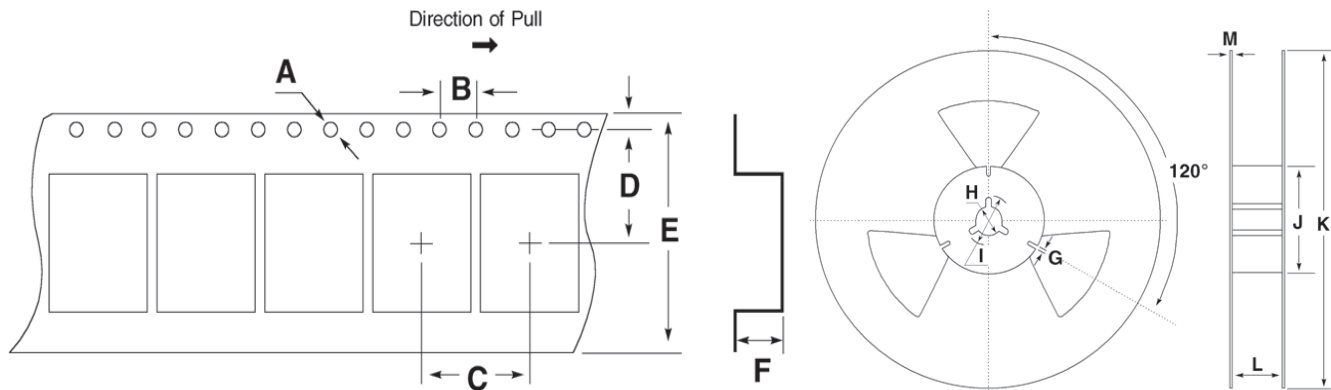

## PRODUCT USE

Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. FOX products are not intended for use in life support systems or similar devices where the failure or malfunction of a FOX product can be reasonably expected to significantly affect the health or safety of users. Anyone using a FOX product in such a manner does so at their own risk, absent an express, written agreement by FOX.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [Fox](#) manufacturer:*

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)  
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)  
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)  
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)  
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)  
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)  
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)  
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)