


# 20W TO126

## High Power Resistors

MHP 20 S

- **Non-Inductive, Small, 20 Watt high power resistor.**
- **TO-126 style package offering a very low thermal resistance of 5.9 °C/W.**
- **Complete thermal flow design available for easy implementation.**
- **Superior vibration durability.**
- **Small thin package for high density PCB installation.**
- **RoHS compliant**

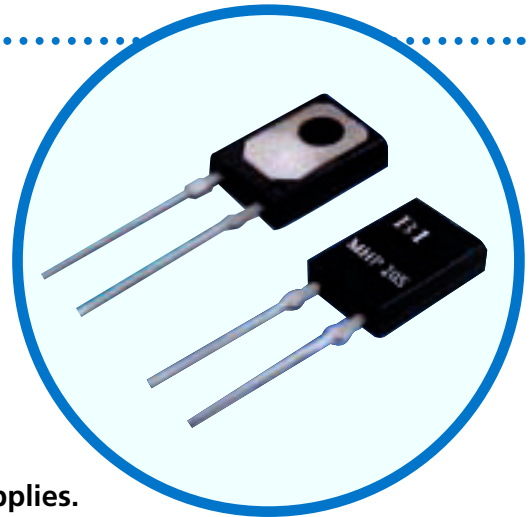

### Applications

- **High frequency emitter resistors in switching power supplies.**
- **High precision CRT color video amplifiers.**
- **High frequency snubber and pulse handling circuits.**
- **VHF amplifiers.**
- **Pulse generator load resistors.**

### Specifications

Items	Specification			Conditions
Power Rating	20 Watts			@ Tab Temp < 25°C
Power Rating	1 Watts			Free air.
Thermal Resistance	5.9°C/W			From hot spot to tab.
Resistance Range	0.01-0.09 Ω	0.1-9.1 Ω	10-220 Ω	Extended resistance range to 51KΩ available
Nominal Resistance Series	E6	E24	E24	Additional 2.0Ω and 5.0 Ω also available
TCR	250 ppm/°C	100 ppm/°C	50 ppm/°C	For -55 to +155°C
Tolerance	+/-5%	+/- 5% and 1%	+/- 1%	
Operation Temp. Range	-55 to +155 °C			
Dielectric Withstand Voltage	2000 Volts DC			60 seconds. between terminals and flange
Load Life	ΔR +/- (1.0 %+0.05 Ω)			25°C, 90 min. ON, 30 min.OFF, 1000 hours.
Humidity	ΔR +/- (1.0 %+0.05 Ω)			60°C, 90-95% RH, DC 0.1W, 1000 hours.
Soldering Heat (Max)	ΔR +/- (1.0 %+0.05 Ω)			250+/-5°C, 3 seconds,
Solderability	Min 95% coverage			230+/-5°C, 3 seconds.
Insulation Resistance	Over 1000 MΩ			Between terminals and metal back plate.
Vibration	ΔR +/- (0.25 % Ω)			

Specifications subject to change without notice

Note:

1. Electrically isolated metal tab.
2. Recommend the use of thermal grease between metal tab and heat sink.
3. Thermal design should account for a thermal resistance between resistor and tab of 5.9°C/W and a maximum resistor temperature of 155°C.
4. Current rating: 25A maximum.
5. For the resistance range 220Ω to 51KΩ, the power rating is restricted to 10W.

### General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.


MHP 20 S

## Electrical Performance


### Electrical Performance

**Derating Curve**

Rating Power (W), with 2.8°C/W heat sink.

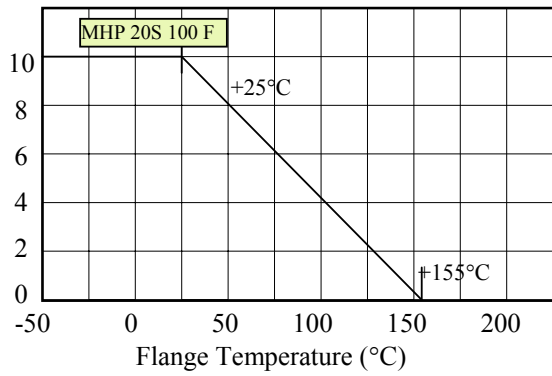


**Flange Temperature Rise**

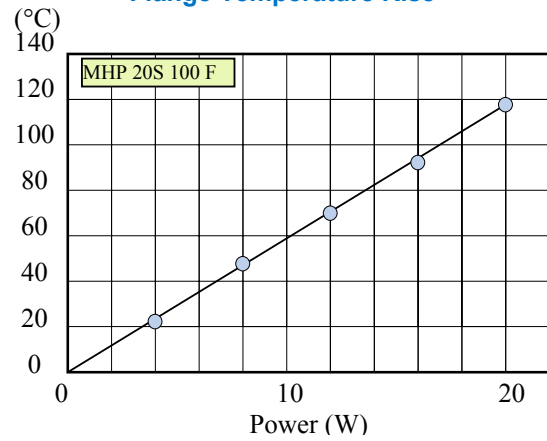


**Frequency Characteristics**

Impedance ( $\Omega$ )

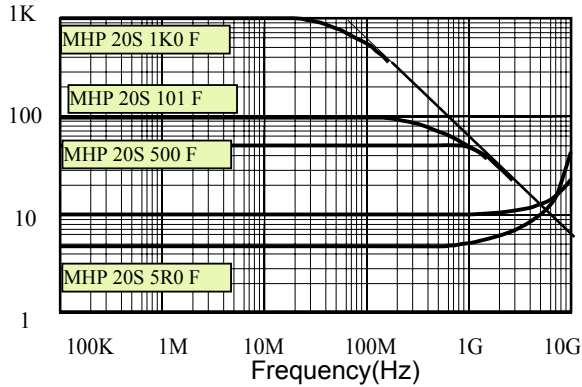

**Pulse Energy Durability**

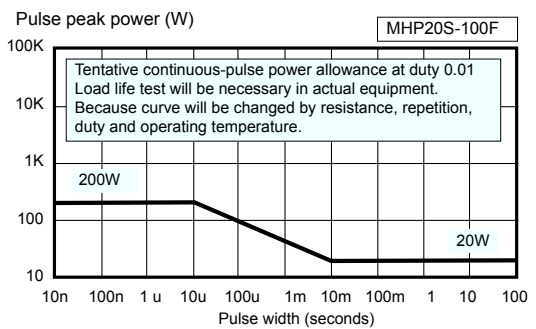


**General Note**

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

MHP 20 S

## Dimensions

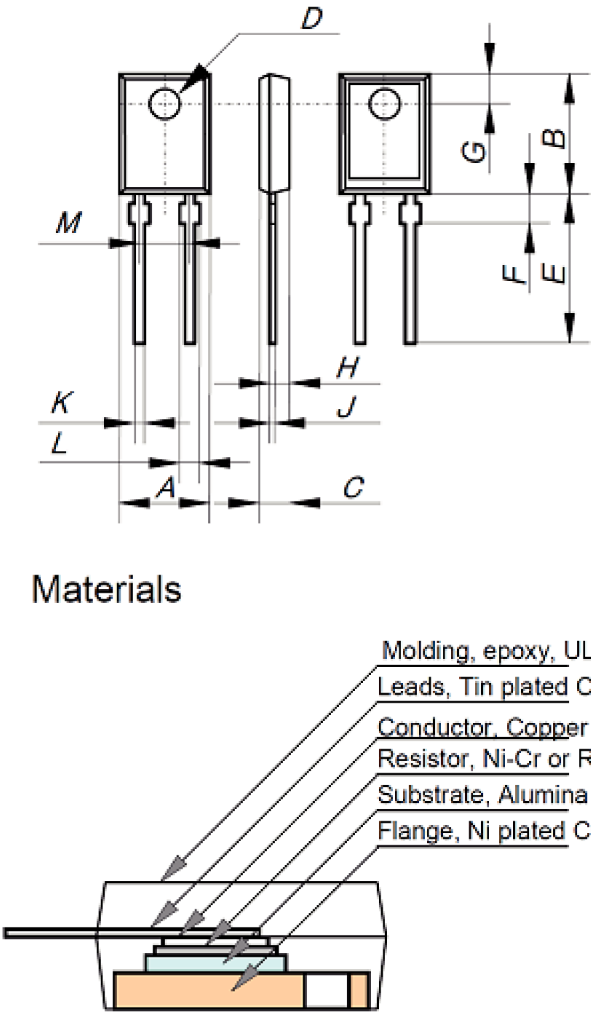


**Materials**

- Molding, epoxy, UL94-V0
- Leads, Tin plated Cu
- Conductor, Copper
- Resistor, Ni-Cr or RuO
- Substrate, Alumina
- Flange, Ni plated Cu

Resistor is electrically isolated from flange

MHP100		
	mm	± mm
A	8.5	± 0.2
B	12.0	± 0.2
C	3.1	± 0.2
D	3.1	± 0.1
E	17.0	± 1.0
F	3.2	± 0.5
G	3.8	± 0.2
H	1.75	± 0.1
J	0.5	± 0.05
K	0.6	± 0.05
L	1.4	± 0.05
M	5.08	± 0.1

## Ordering Information

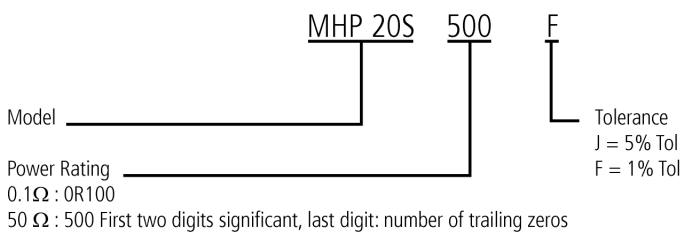


### General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

# MHP20S Series Power Resistor

MHP20S Series

- TO-126 housing
- Low inductance and capacitance for high frequency circuits
- 20W power rating
- High stability film resistance elements
- RoHS compliant

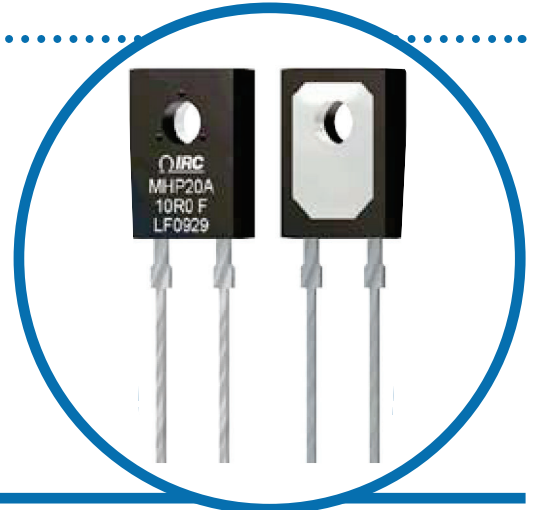


IRC's MHP20S series resistors satisfy demanding applications for accurate and stable power resistors housed in the convenient TO-126 case. The resistance element is isolated from the mounting tab by an alumina ceramic layer, providing very low thermal resistance and ensuring high insulation resistance between terminals and tab. The non-inductive design makes these products especially useful in high frequency and high speed pulse applications.

## Electrical Data


Power Rating <sup>1</sup>		Voltage Rating <sup>4</sup>	Thermal Resistance	Resistance Range		Tolerances	Nominal Resistance Series <sup>5</sup>	Typ. TCR (ppm/°C)	Inductance	Capacitance
Heatsink <sup>2</sup>	Free Air <sup>3</sup>			Min	Max					
20W	1.0W	500 V	5.9°C/W	0.01Ω 0.1Ω 10Ω	0.09Ω 9.1Ω 51KΩ	±1%, ±5%	E24 Includes 2.5 & 5.0 multiplier	See Chart	<10nH	<2pF

<sup>1</sup>Maximum current 25 amps  
<sup>2</sup>Power rating based on 25°C case temperature  
<sup>3</sup>Power rating based on 25°C ambient temperature  
<sup>4</sup>Maximum voltage 500V or  $\sqrt{P \times R}$   
<sup>5</sup>Contact factory for availability of resistance or tolerance values outside this range


Typical TCR For Low Values

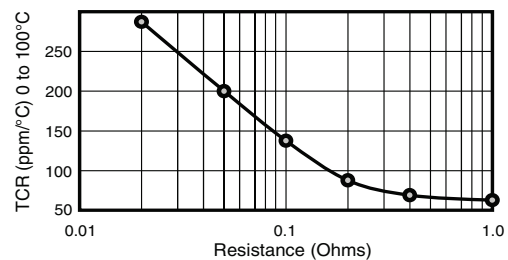

Pulse Energy Durability

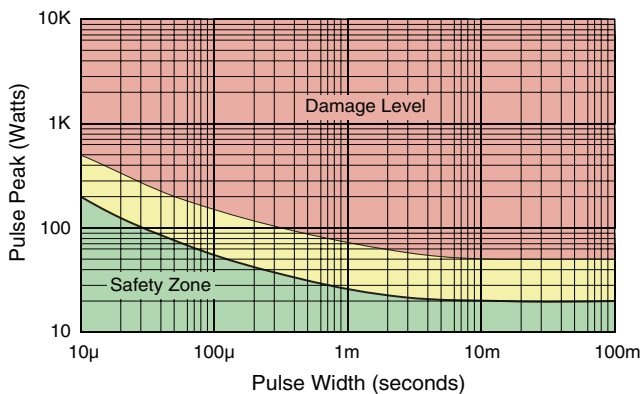


Frequency Characteristics

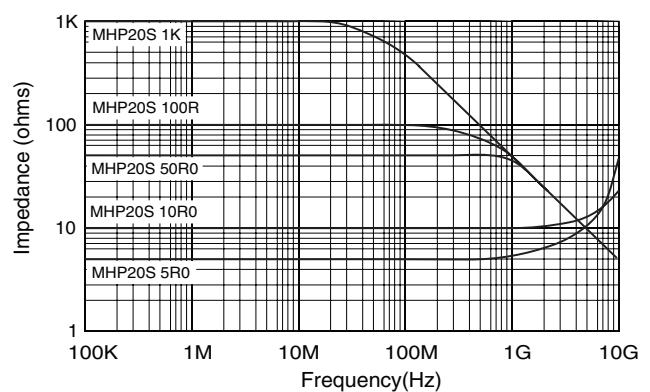

### General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

## Physical Data

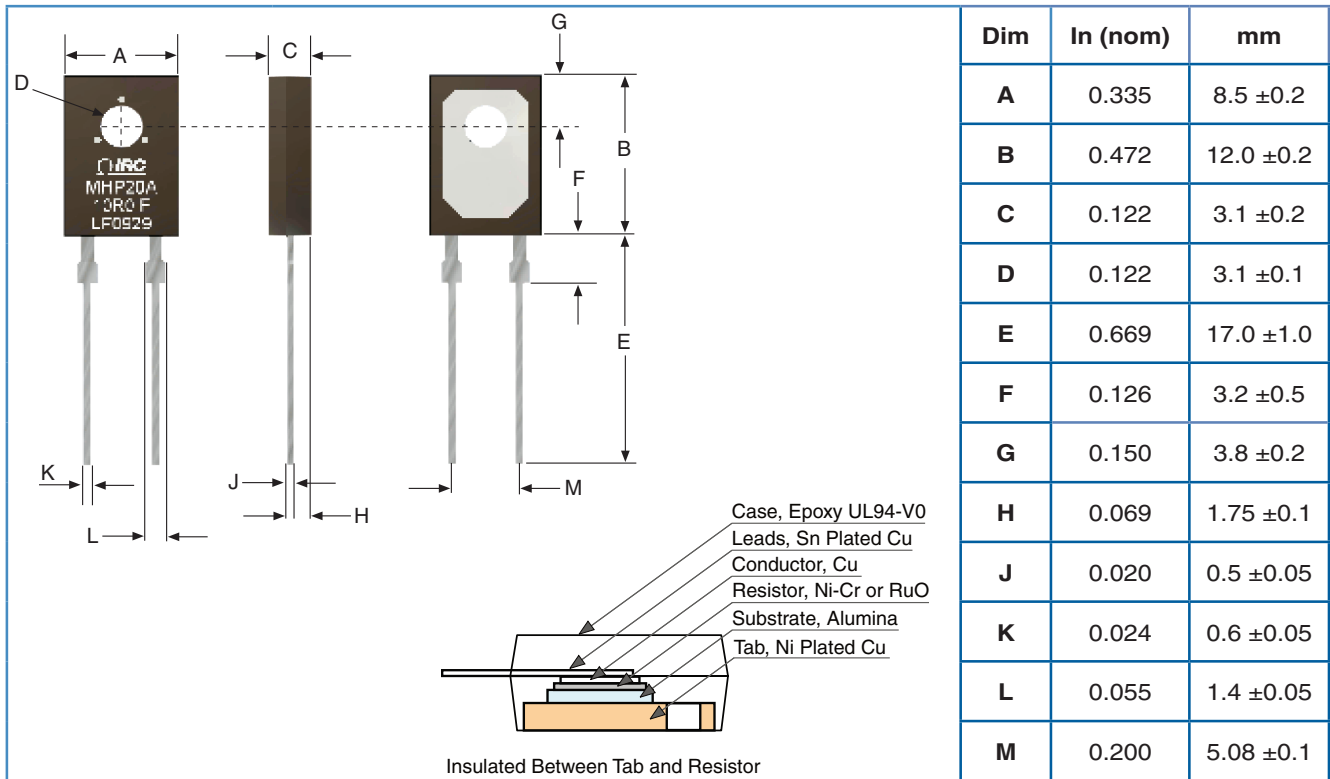

<b>Lead &amp; Tab Material</b>	Tin Plated Copper
<b>Part Weight</b>	0.9g


## Environmental Data

Test	Method	Specification - Performance
<b>Load Life</b>	1,000 Hours @ 25°C; 90 minutes on, 30 minutes off	±(1.0% + 1mΩ)
<b>Humidity</b>	1000 hours; 40°C, 90-95% RH, 0.1W DC	±(1.0% + 1mΩ)
<b>Short Time Overload</b>	2X Rated Power, not to exceed 1.5X Rated Voltage for 5 seconds, 25° w/ Heat Sink	±(0.25% + 1mΩ)
<b>Vibration</b>	10 cycles; X, Y, Z axis, amplitude 0.75mm, 100- 2000Hz sweep/min	±(0.25% + 1mΩ)
<b>Insulation Resistance</b>	Between terminals and tab	>1000MΩ
<b>Dielectric Withstanding Voltage</b>	Terminals to tab; 60sec, 1mA	2000 volts AC
<b>Resistance to Solder Heat</b>	350 ± 5°C for 3 seconds	±(0.10% + 1mΩ)
<b>Solderability</b>	230 ± 5°C, 3sec.	>95% coverage
<b>Operating Temperature Range</b>		-55°C to +155°C


### General Note

TT electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT electronics' own data and is considered accurate at time of going to print.


## Temperature Rise Data

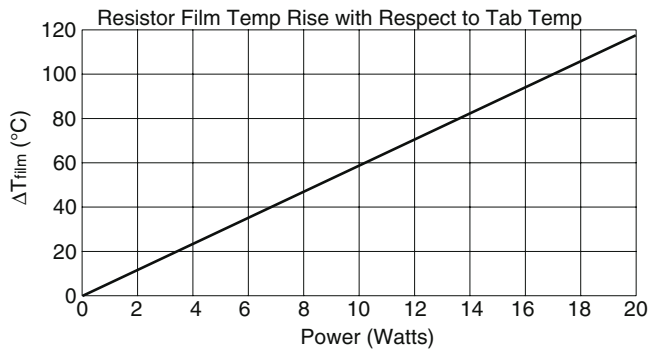

## Power Derating Data

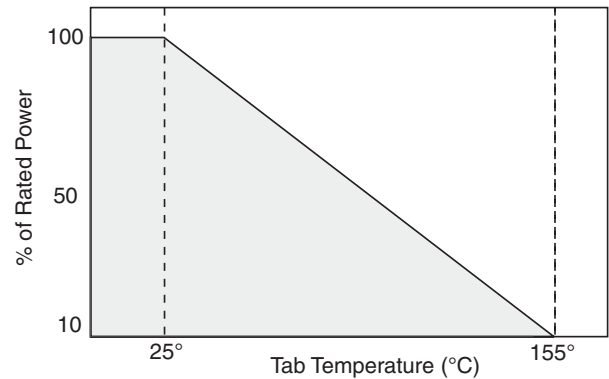

## Tube Packaging Data

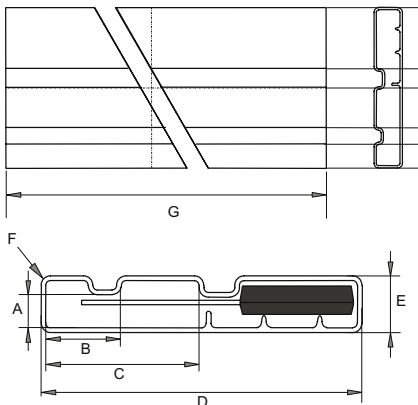

Tube Dimensions		
Dim	Nom. (mm)	Tol. (mm)
A	3.25	0.15
B	8.0	0.15
C	16.25	0.15
D	34.4	(34.0)
E	6.4	(6.0)
F	R0.7	(R0.5)
G	535.0	1.0

## Application Notes

1. Insulating material is unnecessary between the heat sink and the tab, as the resistor film is isolated by the internal alumina substrate.
2. When mounting with a fastener, thermal grease is recommended.
3. Thermal design should satisfy the following equation: Tab Temperature ( $T_T$ ) + [Thermal Resistance ( $R_{\theta JT}$ ) x Power applied (Watts)]  $\leq$  155°C over the full operating temperature of the application.
4. Resistor film temperature is not to exceed 155°C during operation.
5. This product is RoHS compliant by exemption according to RoHS directive 2002/95/EC exemptions 5 & 7, as they apply to lead in glass and internal solder connections.

## Ordering Data

Prefix ..... **TFP** - **MHP20SLF** - **1R50** - **J** - **L04**

Style .....  
MHP20SLF = 20W, TO-126 style power resistor

Resistance Code .....  
4-digit resistance code.  
Ex: 0R05 = 0.05Ω, 10R0 = 10Ω, 1K00 = 1KΩ

Absolute Tolerance Code .....  
J = ±5%; F = ±1%

Packaging Code .....  
L04 = RoHS compliant tube (50 pcs per tube)

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

### General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [tt electronics](#) manufacturer:*

Other Similar products are found below :

[L083S392LF](#) [L061S391LF](#) [L091S224LF](#) [L061S220LF](#) [BCN164A562J7](#) [62PR25KLF](#) [CHP1501R00FLF](#) [BCN164AB470J7](#) [898-3-R150K](#)  
[66XR10](#) [66XR200K](#) [66XR2K](#) [66XR50](#) [67WR1MEG](#) [67WR200KLFTB](#) [67ZR200](#) [68WR5K](#) [68XR2MEG](#) [72PXR10K](#) [72XR2.5K](#) [8109](#)  
[82PR25K](#) [84WR10KTR](#) [PWC2512-330RJI](#) [OPB660N](#) [OPB748WZ](#) [OPB842W51Z](#) [OPB870T55](#) [OPI1266](#) [P110KV1-0Y20BR50K](#)  
[P170SP1-FC15AR10K](#) [89XHR10K](#) [L083C101](#) [91XR5K](#) [SML100M12MSF](#) [PFC-W0805LF-03-2870-B](#) [2627](#) [CR200L.5](#) [RC07GF220J](#)  
[RC55LF-D-196R-B-B](#) [3371R5KL.5](#) [HM00-01800](#) [HM71-10220LFTR](#) [3371R5KL.25](#) [L083C122](#) [W23-330RJI](#) [WH25-47RJI](#) [040585XM](#)  
[6679-420-0](#) [OP231](#)