


	ISO 4026	DIN 913	TufLok®	45 H
---	----------	---------	---------	------

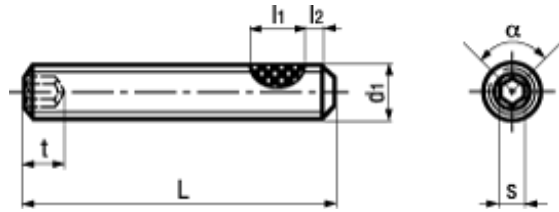

BN 5210
Hex socket set screws
with flat point and TufLok® patch
Steel 45 H
zinc plated blue
<ul style="list-style-type: none"> • ~UNI 5923 • ~CSN 021187

! ISO 4042
 Fasteners hardness ≥ 320 HV with electroplated coatings:
 Susceptible to hydrogen embrittlement!
 Further notice to residual risks can be found in the introduction section.

Set screws are not intended to be tensile-loaded.

i Coating angle α in the screw body area approx. 90° .
 Edge zone (spray transition) up to 180° .
 Coating length $l_1 = \sim 4$ to 6 thread turns.
 Around 1 to 2 thread turns remain uncoated to ensure flawless installation (l_2).

Article#	d ₁	s	t min.	L
1380052	M3	1,5	2	6
1380060				8
1380079				10
1380087				12
3136526	M4	2	2,5	5
1380095				6
1380109				8
1380117				10
1380125				12
1380133				16
1576305	M5	2,5	3	6
1380141				8
1380168				10
1380176				12
1380184				16
1380192				20
1576313	M6	3	2	6
1380206			3,5	8
1380214				10
1370545				12
1370553				16
1370561				20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [Bossard](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [593503FX](#) [0098.0094](#) [0098.9206](#) [0098.9219](#) [0098.9221](#) [0098.9262](#) [596-2114-013](#) [59781-4](#) [59781-6](#) [0098.0026](#)
[0098.9210](#) [0098.9212](#) [60227-01](#) [60227-04](#) [60227-08](#) [60228-09](#) [618-00001](#) [62153-03](#) [62153-11](#) [M316-KSSTMCZ100](#) [M3440-SS](#) [M3442-SS](#) [M3448-SS](#) [6291A](#) [6292-1](#) [6-306105-9](#) [6-306131-4](#) [690432-1](#) [699161-000](#) [700989](#) [7-18023-1](#) [7-21002-8](#) [7230-3](#) [7235-3](#) [7248-1](#) [7248-2](#)
[73542-02](#) [CAPTIVE SHORT THUMBSCREW](#) [745564-1](#) [748174-2](#) [F03-02](#) [SUS316](#) [F1209](#) [751-00001](#) [80011](#) [809704-1](#) [8700](#) [8860220](#)
[9047](#) [95000002B](#) [9885-2](#)