


BN 1359

Hexagon socket head shoulder screws

ISO 7379

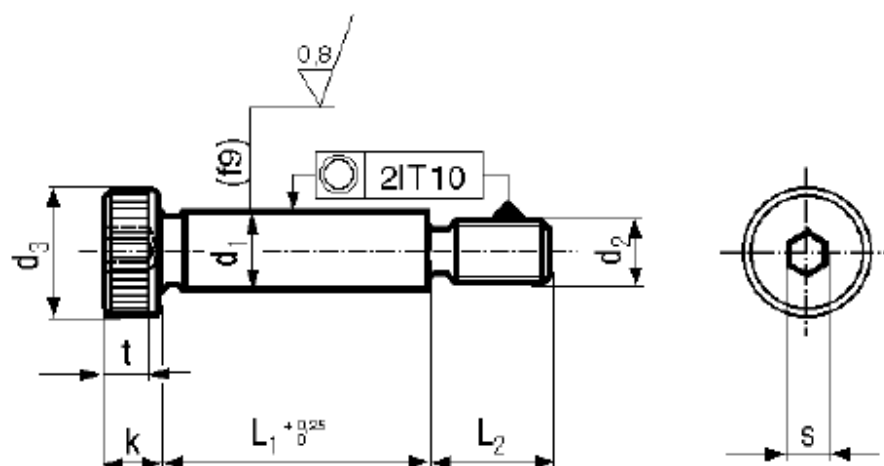

Material	Steel	Quality	012.9 / 12.9
Surface	black		

Article No. - 1985078

d_1	8
d_1 min.	7,951
d_1 max.	7,987
d_2	M6
L_1	45
L_2	11
d_3	13
k max.	5,5
t min.	3,3
s	4

Limited use:

Property class 012.9/12.9 serves only for reducing the wear of the ground fit shaft. When tightening the nuts, the torques must be kept small owing to the thin transition between thread and shaft.

If the screw is tightened against a head bearing surface, the same applies. If the fit shaft makes contact, the tightening torque may have to be even further reduced owing to the smaller bearing surface. Practical preliminary tests are advisable.

Norm-Ø 6; 12; 24 not according to ISO 7379.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [Bossard](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [593503FX](#) [0098.0094](#) [0098.9206](#) [0098.9219](#) [0098.9221](#) [0098.9262](#) [596-2114-013](#) [59781-4](#) [59781-6](#) [0098.0026](#)
[0098.9210](#) [0098.9212](#) [60227-01](#) [60227-04](#) [60227-08](#) [60228-09](#) [618-00001](#) [62153-03](#) [62153-11](#) [M316-KSSTMCZ100](#) [M3440-SS](#) [M3442-SS](#) [M3448-SS](#) [6291A](#) [6292-1](#) [6-306105-9](#) [6-306131-4](#) [690432-1](#) [699161-000](#) [700989](#) [7-18023-1](#) [7-21002-8](#) [7230-3](#) [7235-3](#) [7248-1](#) [7248-2](#)
[73542-02](#) [CAPTIVE SHORT THUMBSCREW](#) [745564-1](#) [748174-2](#) [F03-02](#) [SUS316](#) [F1209](#) [751-00001](#) [80011](#) [809704-1](#) [8700](#) [8860220](#)
[9047](#) [95000002B](#) [9885-2](#)