


Type	Size	Description	Part No.
Incandescent	T6 (T-1¾)	Midget Grooved Lamp	(see table)

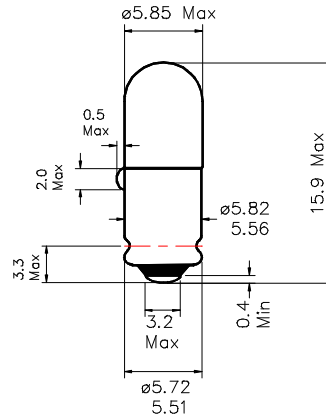

Drawing not to scale  
All dimensions in mm

### PHOTOMETRY DATA

Farnell Part No.	SLI P/N	Lamp Rating	Test Volts	Current (mA)			Light Output (Lm)			Fil Shape	Life (Hrs)
				Min	Nom	Max	Min	Nom	Max		
328790	379	6.3V 1.26W	6.3	180	200	220	3.8	5.0	6.2	C-2R	20000
653688	386	14V 1.12W	14	72	80	88	2.8	3.8	4.8	C-2F	15000
328807	336	14V 1.12W	14	72	80	88	4.7	6.3	7.9	C-2F	1000
328819	334	28V 1.12W	28	36	40	44	3.2	4.3	5.4	C-2F	4000
653690	388	28V 1.12W	28	36	40	44	2.8	3.8	4.8	C-2F	7000
265329	788	36V 1.08W	36	27	30	33	2.6	3.5	4.4	C-2F	5000
328820	790	48V 1.2W	48	22	25	28	1.7	2.5	3.3	CC-2F	5000
328832	799	60V 1.2W	60	18	20	22	1.6	2.2	2.8	CC-2F	5000

### NOTES:

- 1) S5.7s midget grooved cap in accordance with IEC 61-1, (BS EN 60061-1), sheet 7004-62-x.
- 2) Metal base to be durably marked with rating and trademark.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [CEC manufacturer](#):*

Other Similar products are found below :

[303](#) [243](#) [50](#) [81](#) [28PSB](#) [L20120CS-W](#) [120MB](#) [E85](#) [85](#) [47](#) [657](#) [120PSB](#) [130MB](#) [1815](#) [46](#) [1141](#) [927](#) [908](#) [93](#) [1866](#) [44](#) [1829](#) [1820](#) [H3-55W](#)  
[1847](#) [939](#) [3175](#) [51](#) [1818](#) [161](#) [388](#) [680](#) [1156](#) [1813](#) [7371](#) [H3-70W/24V](#) [655](#) [756](#) [464](#) [112](#) [1835](#) [1819](#) [40](#) [7219](#) [757](#) [222](#) [N-F-24.000M-10-](#)  
[1015-3085-40](#) [K-F-12.000M-16-2030-2070-100](#) [755](#) [K-F-16.000M-9-2020-2070-60](#)