


**Features:**

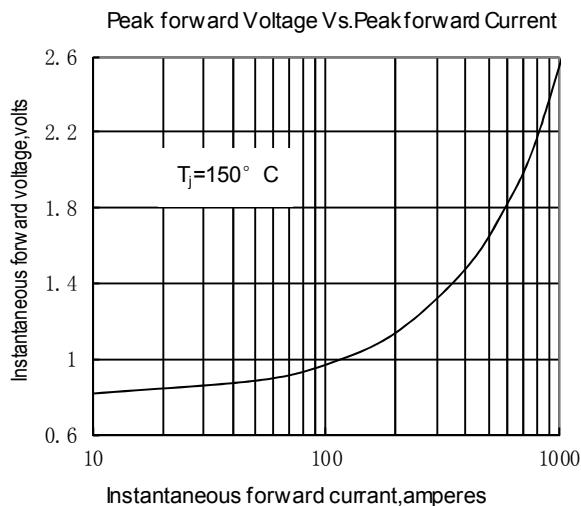
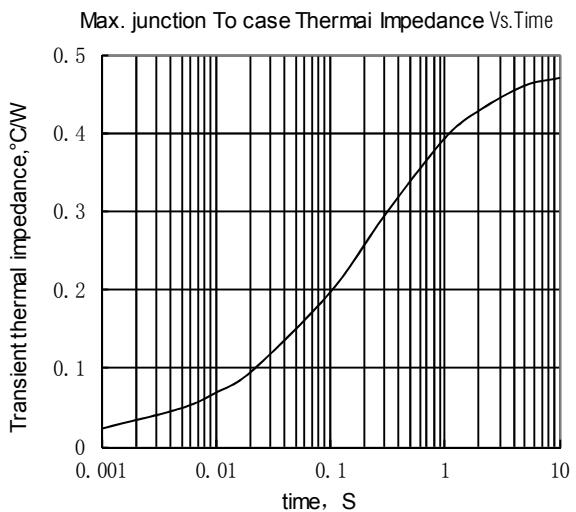
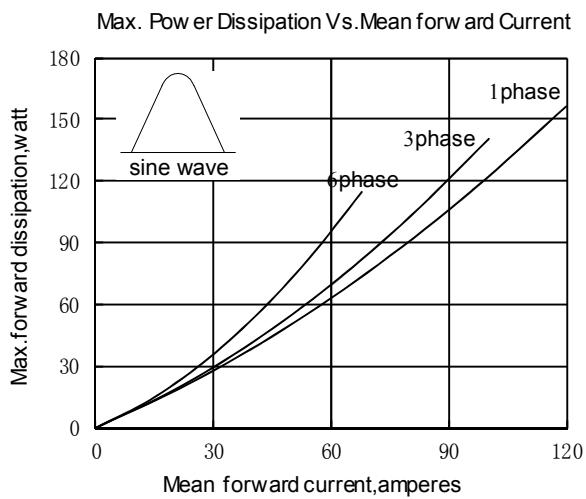
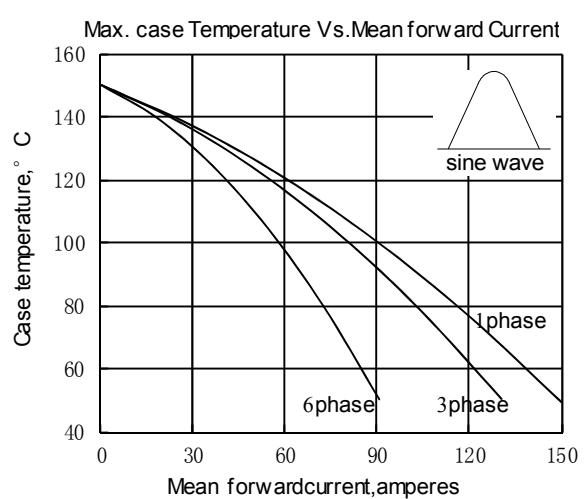
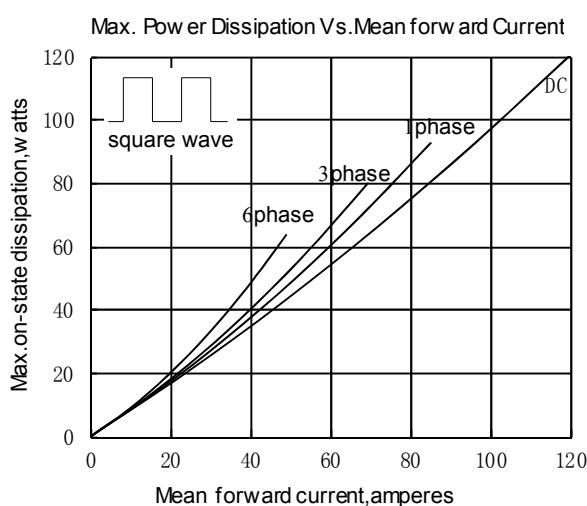
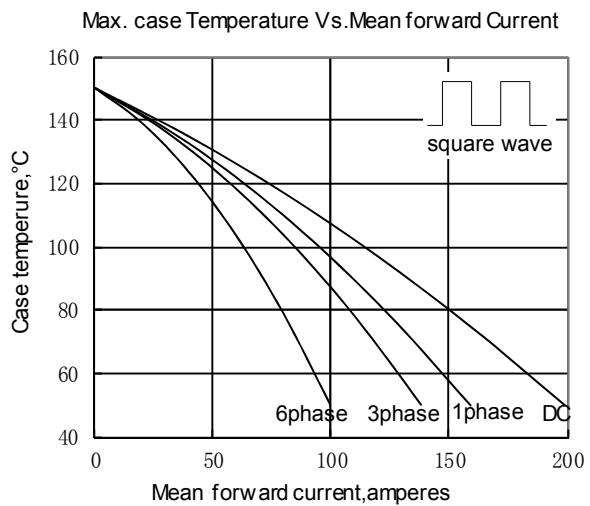
- High performance thermal insulation materials
- Good thermal fatigue performance
- International standard package

**Typical Applications**

- Various rectifiers
- DC supply for PWM inverter

$V_{RSM}$	$V_{RRM}$	Type & Outline
900V	800V	MDx81-08
1100V	1000V	MDx81-10
1300V	1200V	MDx81-12
1500V	1400V	MDx81-14
1700V	1600V	MDx81-16
1900V	1800V	MDx81-18

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^{\circ}\text{C}$	150			81	A
$I_{F(RMS)}$	RMS forward current		150			127	A
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			8	mA
$I_{FSM}$	Surge forward current	10ms half sine wave	150			2.30	KA
$I^2t$	$I^2T$ for fusing coordination	$V_R=0.6V_{RRM}$				26	$\text{A}^2\text{s} \times 10^3$
$V_{FO}$	Threshold voltage		150			0.80	V
$r_F$	Forward slop resistance					1.70	$\text{m}\Omega$
$V_{FM}$	Peak forward voltage	$I_{FM}=245\text{A}$	25			1.45	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled per chip				0.470	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled per chip				0.2	$^{\circ}\text{C}/\text{W}$
$V_{iso}$	Isolation voltage	50Hz,R.M.S, $t=1\text{min}$ , $I_{iso}:1\text{mA(max)}$		2500			V
$F_m$	Terminal connection torque(M5)				4		$\text{N}\cdot\text{m}$
	Mounting torque(M6)				6		$\text{N}\cdot\text{m}$
$T_{stg}$	Stored temperature		-40			125	$^{\circ}\text{C}$
$W_t$	Weight				105		g
Outline	M01H						


**Fig.1**

**Fig.2**

**Fig.3**

**Fig.4**

**Fig.5**

**Fig.6**

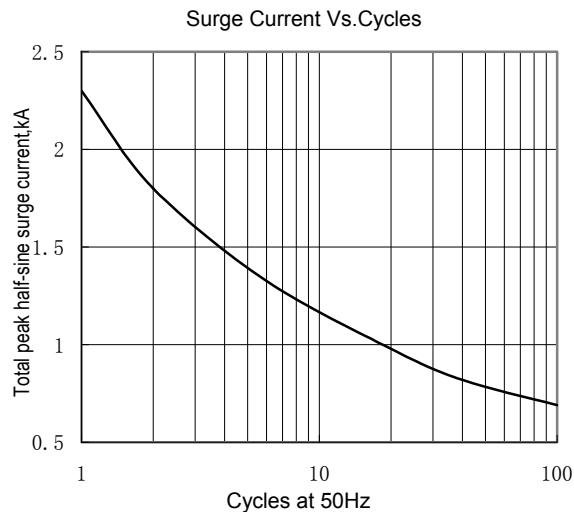


Fig.7

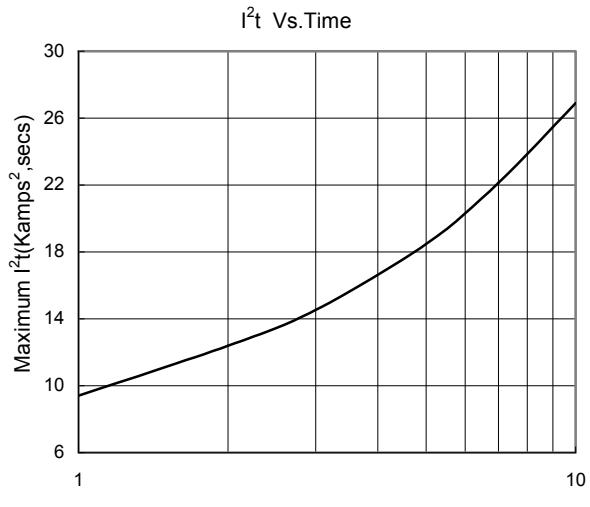
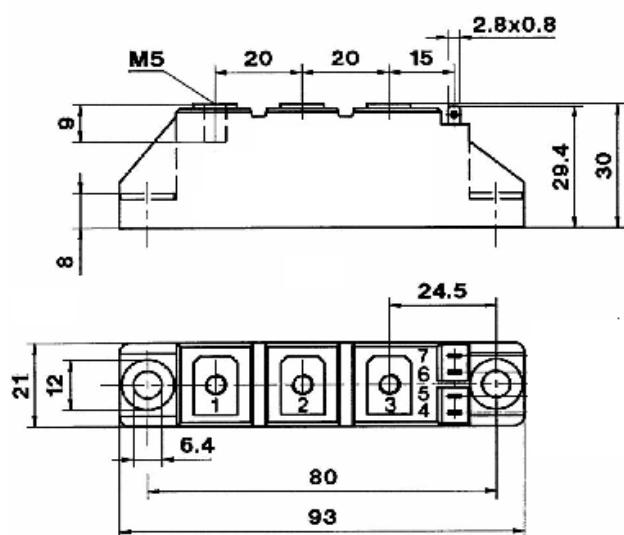




Fig.8

**Outline:**



**M01H**



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Luguang manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2508M-1112](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#)  
[PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [D83C](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#)  
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 15-099R E6327](#) [BAT 54-02LRH E6327](#) [NRVBAF360T3G](#) [NRVTS10100MFST1G](#)  
[NRVTS12100EMFST1G](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#)  
[SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS3045CPIRG](#) [STPS30S45CW](#)  
[PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [CRS10I30B\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBR20100CT-BP](#) [MBRB30H30CT-1G](#)  
[BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [BYS11-90-E3TR3](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#)