


PCI-1723

PCI-1727U


16-bit, 8-ch Analog Output PCI Card with
16-ch Digital I/O

14-bit, 12-ch Analog Output Universal
PCI Card with 32-ch Digital I/O

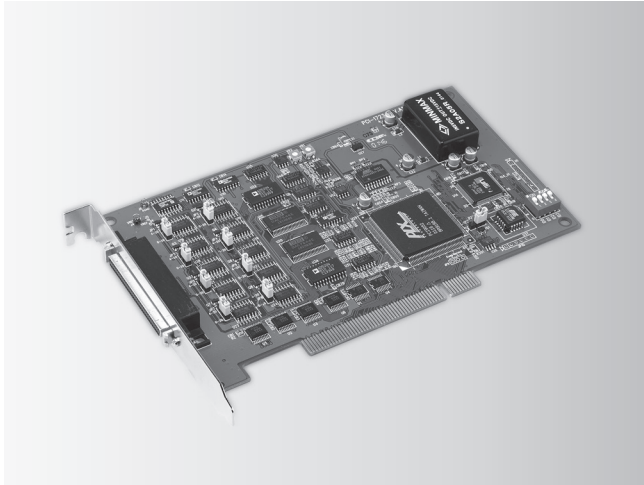

PCI-1723

FCC CE RoHS

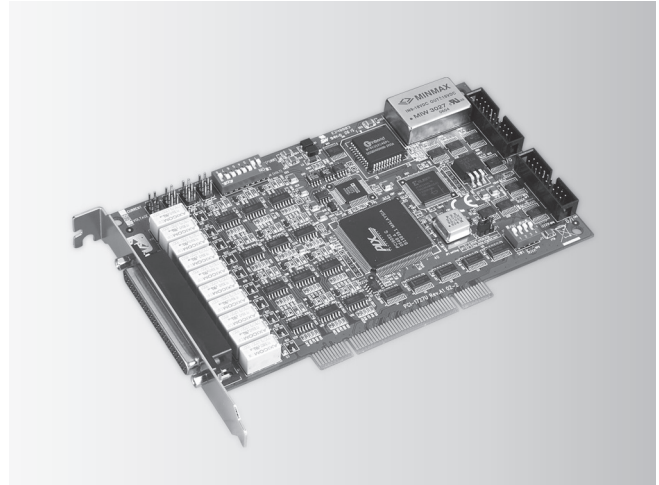

PCI-1727U

FCC CE RoHS

Specifications

Analog Output

- Channels 8
- Resolution 16 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Driving Capability 5 mA
- Output Impedance 0.1 Ω max.
- Operation Modes Software polling, synchronized output
- Accuracy Relative: ±6 LSB
Differential Non-linearity: ±6 LSB (monotonic)

Digital Input/Output

- Channels 16 (shared by input/output)
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- Output Capability Sink Sink: 0.5 V @ 24 mA
Source: 2.0 V @ 15 mA

General

- Bus Type PCI V2.2
- I/O Connectors 1 x 68-pin SCSI female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption Typical: 5 V @ 850 mA, 12 V @ 600 mA
Max.: 5 V @ 1 A, 12 V @ 700 mA
- Operating Temperature 0 ~ 60°C (32 ~ 158°F)
- Storage Temperature -20 ~ 85°C (-4 ~ 185°F)
- Storage Humidity 5 ~ 95% RH non-condensing

Ordering Information

- PCI-1723 16-bit, 8-ch Non-isolated Analog Output PCI Card

Accessories

- PCL-10168-1E 68-pin SCSI Shielded Cable, 1 m
- PCL-10168-2E 68-pin SCSI Shielded Cable, 2 m
- ADAM-3968 68-pin DIN-rail SCSI Wiring Board

Specifications

Analog Output

- Channels 12
- Resolution 14 bits
- Output Rate Static update
- Output Range

Bipolar (V)	±5
Unipolar (V)	0 ~ 5, 0 ~ 10
Current Loop (mA)	0 ~ 20

- Slew Rate 0.7 V/μs
- Driving Capability 15 mA
- Operation Modes Software polling, synchronized output
- Current Loop Excitation 8 ~ 36 V

Digital Input

- Channels 16
- Compatibility 5 V/TTL
- Input Voltage Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- Input Loading 0.5 V @ 0.4 mA max. (low)
2.7 V @ 50 μA max. (high)

Digital Output

- Channels 16
- Compatibility 5 V/TTL
- Output Voltage Logic 0: 0.5 V, Logic 1: 2.4 V
- Output Capability Sink: 0.5 V @ 8 mA
Source: 2.4 V @ 0.4 mA

General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x 37-pin D-type female connector
2 x 20-pin box header
- Power Consumption 5 V @ 460 mA typical, 500 mA max
12 V @ 150 mA typical, 100 mA max
175 x 100 mm (6.9" x 3.9")
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Operating Temperature 0 ~ 50°C (32 ~ 122°F)
- Storing Temperature -20 ~ 65°C (-4 ~ 149°F)
- Storing Humidity 5 ~ 95% RH, non-condensing

Ordering Information

- PCI-1727U 14-bit, 12-ch Universal Analog Output Card

Accessories

- PCL-10120-1E 20-pin flat cable, 1 m
- PCL-10137-1E DB37 cable assembly, 1 m
- ADAM-3937 DB37 wiring terminal for DIN-rail mounting

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)