


DC/DC Converter

THM 20WI Series, 20 Watt

- Ultra wide 4:1 input voltage 20 W DC/DC converter in a 1.6 × 1 " plastic case
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2×MOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current < 2.5 µA
- Extended operating temperature range -40°C to 80°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5 year product warranty

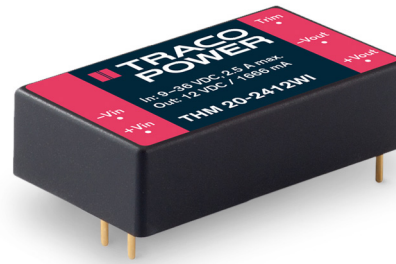

The THM-20WI series is a range of medical 20 Watt DC/DC converters in 1.6" x 1.0" plastic package and with ultra wide 4:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2.5 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 × MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 89% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +80°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

Models				
Order code*	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THM 20-2411WI	9.0 – 36 VDC (24 VDC nominal)	5.0 VDC	4000 mA	88.5 %
THM 20-2412WI		12 VDC	1670 mA	88.5 %
THM 20-2413WI		15 VDC	1330 mA	89.0 %
THM 20-2415WI		24 VDC	833 mA	88.5 %
THM 20-2421WI		±5 VDC	±2000 mA	86.0 %
THM 20-2422WI		±12 VDC	±833 mA	88.5 %
THM 20-2423WI		±15 VDC	±667 mA	89.0 %
THM 20-4811WI	18 – 75 VDC (48 VDC nominal)	5.0 VDC	4000 mA	89.5 %
THM 20-4812WI		12 VDC	1670 mA	88.5 %
THM 20-4813WI		15 VDC	1330 mA	89.0 %
THM 20-4815WI		24 VDC	833 mA	88.5 %
THM 20-4821WI		±5 VDC	±2000 mA	86.0 %
THM 20-4822WI		±12 VDC	±833 mA	88.5 %
THM 20-4823WI		±15 VDC	±667 mA	89.0 %

* suffix -A1 for remote control option with positive logic
 suffix -A2 for remote control option with negative logic

Input Specifications

Input current no load	24 Vin models: 10 mA typ. 48 Vin models: 9 mA typ.	
Surge voltage (3 sec. max.)	24 Vin models: 50 V max. 48 Vin models: 100 V max.	
Start-up voltage	24 Vin models: 9 VDC (or lower) 48 Vin models: 18 VDC (or lower)	
Startup time	60 ms max. (30 ms typ.)	
Under voltage shut down (lock-out circuit)	24 Vin models: 7.8 - 8.6 VDC 48 Vin models: 15.8 - 17.4 VDC	
Input filter	Pi-type	
Conducted noise	<ul style="list-style-type: none"> – Conducted & Radiated input suppression – Filter proposal 	EN 55011 limits to IEC 60601-1-2 4th edition EN55032 class A (internal filter) EN55032 class B with external components www.tracopower.com/overview/thm20wi
EMC immunity	<ul style="list-style-type: none"> – Generic for Medical equipment – ESD (electrostatic discharge) – Radiated immunity – Fast transient / surge (with external input capacitor / diode) – Conducted immunity – Magnetic field immunity 	IEC/EN 60601-1-2 4th edition EN 61000-4-2, air ± 15 kV, contact ± 8 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 2 kV perf. criteria A 24 Vin models: 2 pcs. Nippon chemi-con KY 220 μ F / 100 V 1 pcs. TVS - SMDJ58A, 58V, 3000 W) 48 Vin models: 2 pcs. Nippon chemi-con KY 220 μ F / 100 V 1 pcs. TVS - SMDJ120A, 120V, 3000 W) EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A
External input fuse required (recommended values, slow blow type)	24 Vin models: 4 A 48 Vin models: 2 A	

Output Specifications

Voltage set accuracy	± 1 % max.	
Output voltage adjustment range (single output models only)	5 & 12 VDC models: ± 10 % 15 & 24 VDC models: $-10 / +20$ %	
Regulation	<ul style="list-style-type: none"> – Input variation – Load variation 0 – 100 % – Cross regulation 	single output: 0.2 % max. dual output: 0.5 % max. single output: 0.2 % max. dual output: 1.0 % max. dual output: 5.0 % max. (asymmetrical load 25/100%)
Temperature coefficient	± 0.02 %/K max.	
Minimum load	not required	
Ripple and noise (20 MHz Bandwidth)	(\pm)5.0 VDC models: 50 mVp-p typ. with cap. 10 μ F/25V X7R MLCC (\pm)12 VDC models: 75 mVp-p typ. with cap. 10 μ F/25V X7R MLCC (\pm)15 VDC models: 75 mVp-p typ. with cap. 10 μ F/25V X7R MLCC 24 VDC models: 100 mVp-p typ. with cap. 4.7 μ F/50V X7R MLCC	
Transient response	250 μ s typ.	
Over current limitation	at 150 % typ. of lout rated (hiccup mode) at 185 % max. of lout rated (hiccup mode)	
Short-circuit protection	Continuous, automatic recovery	

Output Specifications (continued)

Overvoltage protection		(±)5.0 VDC models: 6.2 VDC typ. (±)12 VDC models: 15 VDC typ. (±)15 VDC models: 20 VDC typ. 24 VDC models: 30 VDC typ.
Capacitive load	-Single output	5.0 VDC models: 5'000 µF max. 12 VDC models: 850 µF max. 15 VDC models: 700 µF max. 24 VDC models: 220 µF max.
	-Dual output	±5 VDC models: 2'500 µF max. (each output) ±12 VDC models: 500 µF max. (each output) ±15 VDC models: 350 µF max. (each output)

General Specifications


Temperature ranges	- Operating - Case temperature - Storage temperature	-40°C to +80°C +105°C max. -55°C to +125°C
Derating	- nominal input - Vin min. / Vin max.	2%/K above 55°C 1.82%/K above 50°C
Overtemperature protection		at 115°C typ.
Thermal impedance		14.4 K/W typ.
Humidity (non condensing)		5 % to 95 % rel H max.
Isolation voltage (50 Hz, 60 s)		5000 VACrms, reinforced
Clearance/creepage		8 mm min.
Leakage current (at 240VAC, 60Hz)		2.5 µA max.
Isolation capacitance (input/output)		20 pF typ.
Altitude during operation		5000 m
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		1'712'000 h
Switching frequency		225-285 kHz (pulse width modulation)
Vibration and thermal shock resistance		according to MIL-STD-810F
Remote On/Off (for THM 20 -A1 / -A2 option models only)	- Positive logic (-A1 models) - Negative logic (-A2 models) - Off idle current - Remote pin input current	Off: short circuit or 0 – 1.2 VDC (referred to -Vin pin) On: open circuit or 3.5 – 12 VDC (referred to -Vin pin) Off: open circuit or 3.5 – 12 VDC (referred to -Vin pin) On: short circuit or 0 – 1.2 VDC (referred to -Vin pin) 2.5 mA typ. -0.5 mA min. 1 mA max.
Safety standards/approvals	- Medical equipment - Certification documents	ANSI/AAMI ES 60601-1:2005/(R)2012, IEC/EN 60601-1 3rd edition www.tracopower.com/overview/thm20wi
Environmental compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	non-conductive plastic
Base material	non-conductive plastic
Potting material	silicone (UL94 V-0 rated)
Package weight	24 g (0.85oz)
Soldering temperature	max. 265°C / 10 s

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

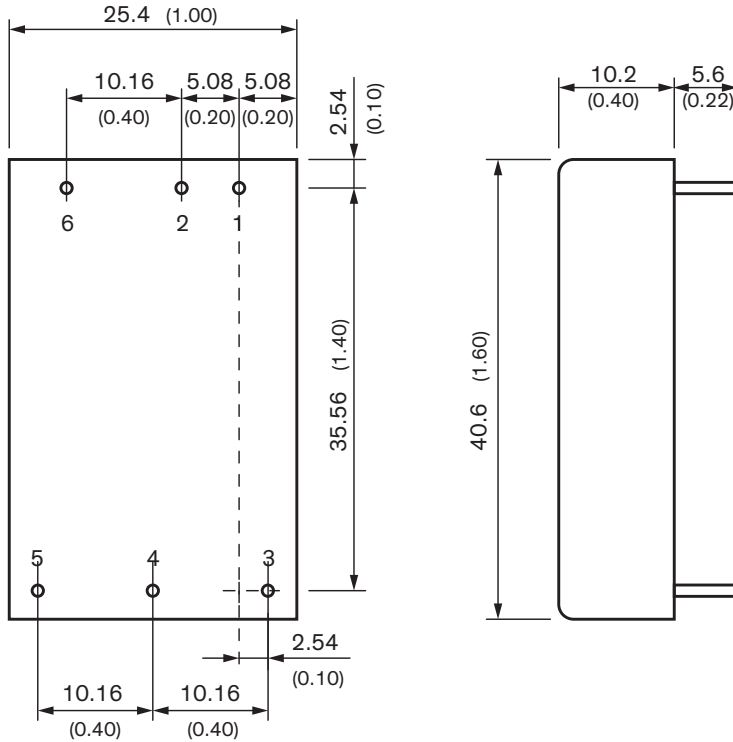

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	-Vout	Common
5	Trim	-Vout
6	No pin* / Remote	No pin* / Remote

*If remote is not selected there will be no pin

Dimensions in [mm], () = Inch
 Tolerances ± 0.5 (± 0.02)
 ± 0.25 (± 0.01)
 Pin pitch tolerances ± 0.25 (± 0.01)
 Pin \varnothing 1.0 ± 0.1 (0.04 ± 0.004)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [MI-220-IW](#) [MI-J22-IY](#) [MI-LC20-IW](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [NAN-0505](#)
[HW-L16D](#) [JAHW100Y1](#) [22827](#) [LT1084CP](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-](#)
[12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V24B3V3C150BG](#) [V24C12M100BL](#) [V24C5C100BL2](#) [V300B28C250BF3](#)
[V300C12C150BG](#) [V300C24C150BG](#) [V375C24E150BG](#) [VE-JW3-CY](#) [VI-241-EU](#) [419-2063-401](#) [419-2067-501](#) [DCG40-5G](#) [DFC15U48D15](#) [XGS-](#)
[0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [SSQE48T25025-NAA0G](#)