





D

Stripmaster® Wire Strippers



Stripmaster® and Stripmaster® Lite Wire Strippers

- One-step stripping enhances productivity
- Spring-action motion increases leverage and reduces operator fatigue
- Precision-ground, knife-type blades provide clean, accurate stripping
- Sturdy die cast frame provides long-term durability
- Wire gripper holds wire securely in position
- Stripmaster® Lite designed for smaller hands — 3/4 the size of the standard Stripmaster®

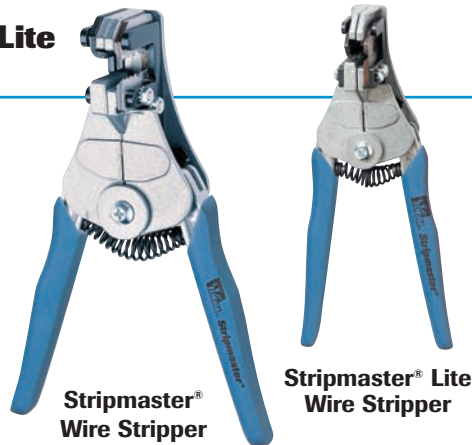

Gripper holds the wire securely in position.



Knife-type stripping blades have form-ground holes which penetrate the insulation like a knife, giving a clean insulation cut.

Stripmaster® Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (Inches)													Cat. No.	Replacement Blades (Pair) Cat. No.	
Wire Size AWG															
6	8	10	12	14	16	18	20	22	24	26	28	30			
	.159	.141	.106											45-090* or 45-290**	L-4419
		.144	.105	.085	.073	.073								45-091	L-4420
		.144	.113	.090	.072	.061	.048	.048						45-092* or 45-292**	L-4421
			.090	.072	.061	.039	.039							45-093	L-4422
.230	.198													45-096	L-4453
				.072	.061	.048	.039	.032	.026					45-097	L-4994
						.048	.039	.032	.026	.021	.016			45-098	L-5361
	.198	.167			.062	.055								45-099	L-8763

*Boxed **Blister Card Tolerances +.001 -.005

Stripmaster® Lite Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (Inches)													Cat. No.	Replacement Blades (Pair) Cat. No.	
Wire Size AWG															
12	14	16	18	20	22	24	26	28	30	16/18	20/22	Cutting Edge			
		.072	.061	.048	.039									45-671	LB-1001
						.032	.026	.021	.016					45-672	LB-1002
.113	.090	.072	.061 (All Stranded wire)											45-673	LB-1003
.096	.085	.073	.061 (12 & 14 Solid wire, 16 & 18 Stranded wire)											45-674	LB-1004
										.072	.048	.250 Wide		45-675	LB-1005

Tolerances +.001 -.005

Coax Stripmaster® Wire Strippers and Blades

Description	Coax Cable Type (RGU)	Repl. Blade Cat. No.	Cat. No.
Coax Stripmaster® for RG-6	RG-6	LB-740	45-262
Coax Stripmaster® for RG-58	RG-58	LB-742	45-264
Coax Stripmaster® for RG-59	RG-59	LB-743	45-265
Coax Stripmaster® for RG-62	RG-62	LB-744	N/A
Coax Stripmaster® for RG-6 QuadShield	RG-6 QuadShield	LA-3953	45-282

Coaxial Cables: two-step strip for termination, jacket and dielectric.

Replacement Frame Assemblies	Cat. No.
For Stripmaster® Wire Strippers	L-5620
For Stripmaster® Lite Wire Strippers	LB-1421

Stripmaster® Wire Strippers with Rectangular Holes

Description	Cat. No.	Replacement Blades (Pair) Cat. No.
For Flat Telephone Cable (.60 in. or 1.52mm)	N/A	LB-1155
For European Flat Lamp Cord	45-089	L-8762
For SP-SPT Lamp Cord	45-095*	L-4452

*Also strips 2- and 3-conductor low-voltage wire used in G.E. and Touchplate remote control wiring system.

Optional Accessories	Cat. No.
Transparent Adjustable Wire Stop (for Stripmaster® Wire Strippers)	L-5270
Transparent Adjustable Wire Stop (for Stripmaster® Lite Wire Strippers)	LB-1195
Replacement Moveable Gripper	L-1953

Stripmaster® Wire Strippers

Stripmaster® Wire Strippers

Stripmaster® Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (mm)													Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
Wire Size AWG															
6	8	10	12	14	16	18	20	22	24	26	28	30			
	4	3.6	2.7										45-090 or 45-290	L-4419	L-5620
		3.6	2.7	2.2	1.8								45-091	L-4420	L-5620
		3.6	2.9	2.3	1.8	1.5	1.2						45-092 or 45-292-241*	L-4421	L-5620
			2.3	1.8	1.5	1.2	1						45-093	L-4422	L-5620
2.3	1.9												45-096		
					1.8	1.5	1.2	1	0.8	0.7			45-097	L-4994	L-5620
							1.2	1	0.8	0.7	0.5	0.4	45-098	L-5361	L-5620
	5	4.2			1.6	1.4							45-099	L-8763	L-5620

*Boxed Tolerances +.001 -.005

Stripmaster® Lite Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (mm)													Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
Wire Size AWG															
12	14	16	18	20	22	24	26	28	30	16/18	20/22	Cutting Edge			
		1.8	1.5	1.2	1								45-671	LB-1001	LB-1421
						0.8	0.7	0.5	0.4				45-672	LB-1002	LB-1421
2.9	2.3	1.8	1.5 (All Stranded wire)										45-673	LB-1003	LB-1421
2.4	2.2	1.9	1.5 (12 & 14 Solid wire, 16 & 18 Stranded wire)										45-674	LB-1004	LB-1421
										1.8	1.2	6.4 wide	45-675	LB-1005	LB-1421

Stripmaster® Wire Strippers and Knife-Type Blades for Metric Wire

Specifications—Stripping Hole Diameter (mm)														Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.
Wire Size (mm²)																
0.05	0.1	0.15	0.22	0.34	0.5	0.75	1	1.5	2.5	4	6	8	10			
												4.3	5	45-090-341 or 45-290-341*	L-4419M	LA-2358
						1.3	1.6	1.9	2.4	3	3.6			45-092-341 or 45-292-341*	L-4421M	LA-2358
0.6	0.7	0.8	0.9	1	1.1									45-098-341 or 45-298-341*	L-5361M	LA-2358

*Boxed Tolerances +.001 -.005

Stripmaster® Lite Wire Strippers and Knife-Type Blades for Metric Wire


Specifications—Stripping Hole Diameter (mm)										Cat. No.	Replacement Blades (Pair) Cat. No.	Replacement Frame Cat. No.	
Wire Size (mm²)													
0.05	0.1	0.15	0.22	0.34	0.5	0.75	1	1.5					
				1	1.1	1.3	1.6	1.9			45-671-341	LB-1001M	H-2909
0.6	0.7	0.8	0.9								45-672-341	LB-1002M	H-2909

Free Application Engineering Service and made-to-order Custom Stripmaster® and Stripmaster® Wire Strippers are available. Contact IDEAL INDUSTRIES, INC. for complete information at 1-800-435-0705.




Custom Stripmaster® and Custom Stripmaster® Lite Wire Strippers

- Strips 30 through 10 AWG solid or stranded wire
- Mil-spec die-type blades allow precision stripping
- Inner cutting hole sized to conductor and counter-bored holes sized to insulation
- Replaceable Grippers
- Optional short stop latch and transparent wire stop
- Cushioned, comfort grip handles
- Custom Stripmaster® Lite is 3/4's the size of Custom Stripmaster® Wire Stripper and strips 16 through 30 AWG solid or stranded wire
- Custom Stripmaster® Lite requires one-third less hand pressure for each strip actuation
- Engineering Service and made-to-order blades available. Contact factory for complete product and blade number listing.



Gripper pads hold the wire securely in a centerline relationship with the blade.



Die-type blades incorporate a counter-bored hole sized to the insulation and an inner cutting hole sized to the conductor. This varies depending on insulation type and thickness.



Stripmaster® Wire Strippers

Custom Stripmaster® Wire Strippers and Die-Type Blades

Specifications — $\frac{\text{Cutting Hole Diameter}}{\text{Counterbore Diameter}}$ (Inches)											Stripper Cat. No.	Blade Only Cat. No.
Wire Size AWG												
30	28	26	24	22	20	18	16	14	12	10		
For Type E Teflon® (600V)												
								.076 .0935	.096 .113	.119 .136	45-176	L-5559
		.023 .039	.028 .043	.034 .052	.042 .0595	.052 .070	.061 .081				45-177	L-5560
.016 .032	.019 .035	.023 .039									45-178	L-5561
For Type EE Teflon® (1000V)												
								.076 .104	.096 .125	.119 .144	45-173	L-5562
		.023 .0465	.028 .055	.034 .0595	.042 .067	.052 .0785	.061 .089				45-174	L-5563
.016 .042	.019 .043	.023 .0465									45-175	L-5564
For Other Misc. Insulations												
								.076 .113	.0937 .138	.116 .154	45-170	L-5210
		.022 .052	.0292 .0595	.035 .0635	.042 .073	.052 .086	.062 .096				45-171	L-5211
.016 .037	.020 .040	.024 .043									45-172	L-5436
For Wire Wrap & Other Thin Insulated Wire												
.012 .020								Three identical holes			45-179	L-7625
.012 .019	.014 .023	.018 .025	.024 .033					Solid Wires			45-169	L-9300

Tolerances: Cutter Dia.: ± .001; Counter-bore Dia.: ± .002
 The 45-170 Series is a Custom Stripmaster® Wire Stripper frame without the short stop latch and wire stop.
 Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

Stripmaster® Wire Strippers



Custom Stripmaster® Lite Wire Strippers and Die-type Blades

Specifications — Cutting Hole Diameter / Counterbore Diameter (Inches)										Stripper Cat. No.	Blade Only Cat. No.
Wire Size AWG											
30	28	26	24	22	20	18	16				
MIL-W-16878 Type E 600V Teflon® Wire											
				.034 .052	.042 .0595	.052 .070	.061 .081			45-638	LB-918
		.023 .039	.028 .043	.034 .052	.042 .0595					45-639	LB-919
.016 .032	.019 .035	.023 .039	.028 .043							45-640	LB-920
MIL-W-16878 Type EE 1000V Teflon® Wire											
				.034 .0595	.042 .067	.052 .0785	.061 .089			45-635	LB-915
		.023 .0465	.028 .055	.034 .0595	.042 .067					45-636	LB-916
.016 .042	.019 .043	.023 .0465	.028 .055							45-637	LB-917
General Purpose											
				.035 .0635	.042 .073	.052 .086	.062 .096			45-632	LB-912
		.022 .052	.0292 .0595	.035 .0635	.042 .073					45-633	LB-913
.016 .037	.020 .040	.024 .043	.0292 .0595							45-634	LB-914
Wire Wrapping (Thin Insulation Solid Wire)											
.012 .020						Four holes, same size				45-641	LB-921
.012 .019	.014 .023	.018 .025	.024 .033			Solid Wires				45-631	LB-911

Tolerances: Cutter Dia.: ± .001; Counterbore Dia.: ± .002. Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

Custom Stripmaster® Wire Strippers and Die-Type Blades

Specifications — Cutting Hole Diameter / Counterbore Diameter (Millimeters) (Reference chart only. Blades are not marked in mm)											Stripper Cat. No.	Blade Only Cat. No.
mm² Nom												
0.05	0.08	0.13	0.2	0.22	0.5	1.0	1.5	2.5	4.0	6.0		
For Type E Teflon® (600V)												
								1.93 2.37	2.44 2.87	3.02 3.45	45-176	L-5559
		.584 .99	.711 1.09	.863 1.32	1.07 1.5	1.33 1.78	1.55 2.06				45-177	L-5560
.406 .813	.482 .889	.584 .99									45-178	L-5561
For Type EE Teflon® (1000V)												
								1.93 2.64	2.44 3.17	3.02 3.6	45-173	L-5562
		.584 1.17	.711 1.39	.863 1.5	1.07 1.70	1.33 1.99	1.55 2.49				45-174	L-5563
.406 1.07	.482 1.09	.584 1.17									45-175	L-5564
For Other Misc. Insulations												
								1.93 2.87	2.38 3.45	2.94 3.91	45-170	L-5210
		.560 1.33	.736 1.5	.889 1.61	1.07 1.85	1.33 2.18	1.57 2.44				45-171	L-5211
.406 .940	.508 1.01	.609 1.09									45-172	L-5436
For Wire Wrap & Other Thin Insulated Wire												
.305 .508						Three identical holes					45-179	L-7625
.305 .482	.356 .584	.457 .635	.609 .838								45-169	L-9300

Tolerances: Cutter Dia.: ± .025mm; Counterbore Dia.: ± .051mm. Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

1-800-435-0705 for Customer Service

www.idealindustries.com

D-5

Stripmaster® Wire Strippers




Custom Stripmaster® Lite Wire Strippers and Die-type Blades

Specifications — $\frac{\text{Cutting Hole Diameter}}{\text{Counterbore Diameter}}$ (Millimeters)									Stripper Cat. No.	Blade Only Cat. No.
Wire Size AWG										
1,5	1,0	0,5	0,22	0,2	0,13	0,08	0,05			
MIL-W-16878 Type E 600V Teflon® Wire										
$\frac{1,55}{2,06}$	$\frac{1,32}{1,99}$	$\frac{1,07}{1,51}$	$\frac{0,86}{1,32}$						45-638	LB-918
		$\frac{1,07}{1,51}$	$\frac{0,86}{1,32}$	$\frac{0,71}{1,09}$	$\frac{0,58}{,099}$				45-639	LB-919
				$\frac{0,71}{1,09}$	$\frac{0,58}{0,99}$	$\frac{0,48}{0,89}$	$\frac{0,41}{0,82}$		45-640	LB-920
MIL-W-16878 Type EE 1000V Teflon® Wire										
$\frac{1,55}{2,26}$	$\frac{1,32}{1,99}$	$\frac{1,07}{1,70}$	$\frac{0,86}{1,51}$						45-635	LB-915
		$\frac{1,07}{1,70}$	$\frac{0,86}{1,51}$	$\frac{0,71}{1,40}$	$\frac{0,58}{1,18}$				45-636	LB-916
				$\frac{0,71}{1,40}$	$\frac{0,58}{1,18}$	$\frac{0,48}{1,09}$	$\frac{0,41}{1,07}$		45-637	LB-917
General Purpose										
$\frac{1,57}{2,44}$	$\frac{1,32}{2,18}$	$\frac{1,07}{1,85}$	$\frac{0,89}{1,61}$						45-632	LB-912
		$\frac{1,07}{1,85}$	$\frac{0,89}{1,61}$	$\frac{0,74}{1,51}$	$\frac{0,56}{1,32}$				45-633	LB-913
				$\frac{0,74}{1,51}$	$\frac{0,61}{1,09}$	$\frac{0,51}{1,02}$	$\frac{0,41}{0,86}$		45-634	LB-914
Wire Wrapping (Thin Insulation Solid Wire)										
		Four holes, same size					$\frac{0,30}{0,76}$		45-641	LB-921
		Solid Wires		$\frac{0,61}{0,84}$	$\frac{0,46}{0,64}$	$\frac{0,36}{0,58}$	$\frac{0,30}{0,48}$		45-631	LB-911


Tolerances: Cutter Dia.: ± .001; Counterbore Dia.: ± .002. Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

Stripmaster® Wire Strippers


Stripmaster® Wire Strippers



Short-stop Latch protects wire strands by limiting the stripping stroke to 5/32 in. and retains the slug until the wire is ready for terminating.




Transparent wire stop provides uniform stripping length.



Gripper Pads are available in your choice of either parallel, file or grit-type. File-type pads may be used on hard-to-grip insulations such as Kapton® and some Teflon®.


Stationary Gripper for Red Handle Units

For 10, 12 & 14 AWG Wire



Stationary Gripper for Black Handle Units

For 16 thru 30 AWG wire.



Replacement Gripper Pads

For Custom Stripmaster® and Custom Steel Stripmaster® Wire Strippers			
Surface Type	Gripper Set* Cat. No.	Movable Gripper Cat. No.	Stationary Gripper (Thickness)
Grit**	LB-197	L-5212	L-5215 (.129 in.)
Grit**	LB-198†	L-5212	L-5217 (.156 in.)
File	LB-721	LB-718	LB-719 (.129 in.)
File	LB-722‡	LB-718	LB-720 (.156 in.)
Parallel	LB-730	LB-727	LB-728 (.129 in.)
Parallel	LB-731	LB-727	LB-729 (.156 in.)

For Custom Stripmaster® Lite Wire Strippers

Surface Type	Gripper Set* Cat. No.	Movable Gripper Cat. No.	Stationary Gripper (Thickness)
Grit*	LB-1188	LB-882	LB-883 (.109 in.)
File	LB-1189	LB-1184	LB-1185 (.109 in.)
Parallel	LB-1190	LB-1186	LB-1187 (.109 in.)

* Gripper Set includes one movable gripper, one stationary gripper.

** Grit pads are standard for most Custom Stripmaster® and Custom Stripmaster® Lite products.

† Formerly L-7954

‡ Formerly L-8928. These are for use on hard-to-grip surfaces such as Kapton® and Teflon®.

Gripper pad selection depends on insulation type and user preference.

Note: For wire gauge 10-14, use .129 in. stationary gripper. For 16-30 AWG, use .156 in. gripper.

Replacement Frame Assemblies

For Custom Stripmaster® Wire Strippers	Cat. No.
Frame only, 10-14 AWG	L-5616
Frame only, 16-30 AWG	L-5617
Frame only, 10-14 AWG, Wire Stop and Latch	L-5618
Frame only, 16-30 AWG, Wire Stop and Latch	L-5619
Frame only, 10-14 AWG, internal spring (see note)	L-9039
Frame only, 16-30 AWG, internal spring (see note)	L-9038

Note: Frames with internal springs allow additional blade penetration pressure for difficult and multi-layered insulation types.

For Custom Stripmaster® Lite Wire Strippers	Cat. No.
Frame only	LB-895
Frame only, Wire Stop and Latch	LB-896

For Custom Steel Stripmaster® Wire Strippers	Cat. No.
Frame only, 10-14 AWG	LB-1091
Frame only, 16-30 AWG	LB-1092
Frame only, 10-14 AWG, internal spring (see note)	LB-1090
Frame only, 16-30 AWG, internal spring (see note)	LB-1089

Note: Frames with internal springs allow additional blade penetration pressure for difficult and multi-layered insulation types.

Optional Accessories

Short Stop Latch	Cat. No.
For Custom & Custom Steel Stripmaster® Wire Strippers	L-5269
For Custom Stripmaster® Lite Wire Strippers	LB-1194

Transparent Adjustable Wire Stop Assembly	Cat. No.
For Custom & Custom Steel Stripmaster® Wire Strippers	L-5270
For Custom Stripmaster® Lite Wire Strippers	LB-1195

Custom Steel Stripmaster® Wire Strippers and Special Flat-Blades for Ribbon and Multi-Conductor Cable

Description	Blade Gap ("x") vertical height	Blade Only Cat. No.	Frame & Blade Cat. No.
Custom Steel frame only	N/A	N/A	LB-1091
Flat blade for 26 AWG (.40mm dia.) multi-conductor	.022 in.	LB-1151	45-890
Flat blade for 24 AWG (.00mm dia.) multi-conductor	.030 in.	LB-1152	45-891
Flat blade for 22 AWG (.64mm dia.) multi-conductor	.038 in.	LB-1153	45-892
Flat blade for 20 AWG (.00mm dia.) multi-conductor	.050 in.	LB-1154	45-893
Flat blade for 18 AWG (1.02mm dia.) multi-conductor	.060 in.	LB-1155	45-894
Flat blade for 16 AWG (1.29mm dia.) multi-conductor	.075 in.	LB-1156	45-895

Teflon® and Kapton® are registered trademarks of E. I. du Pont de Nemours and Company.



Custom Stripmaster® Wire Stripper and Custom Stripmaster® Lite Wire Stripper MIL-spec reference chart

Wire Specification	Custom Stripmaster®			Custom Stripmaster® Lite		
	Cat. No.	Blade Only Cat. No.	Wire Gauge	Cat. No.	Blade Only Cat. No.	Wire Gauge
MIL-W-81044/4/5/6 MIL-W-5086/1/7	45-170 45-171	L-5210 L-5211	10-14 AWG 16-26 AWG	N/A	N/A	N/A
MIL-W-81044/8/9/10 MIL-W-16878/5 MIL-W-81381/3/4	45-173 45-174 45-175	L-5562 L-5563 L-5564	10-14 AWG 16-26 AWG 26-30 AWG	45-635 45-637 45-637	LB-915 LB-917 LB-917	16-22 AWG 24-30 AWG 24-30 AWG
MIL-W-22759/32/33/44/45/46	45-1987 45-1654	45-1987-1 45-1654-1	16-26 AWG 16-26 AWG	45-2133 45-2132	45-2133-1 45-2132-1	16-24 AWG 16-24 AWG
MIL-81044/11/12/13 MIL-W-22759/34/35/41/42/43	45-1611 45-2500 45-1987	45-1611-1 45-2500-1 45-1987-1	10-14 AWG 10-14 AWG 16-26 AWG	45-2133 45-2118 45-640	45-2133-1 45-2118-1 LB-920	16-24 AWG 20-26 AWG 24-30 AWG
Raychem 44A021X, 44/051X MIL-W-16878/4 MIL-W-22759/11/12/22/23	45-176 45-1611 45-177 45-178	L-5559 45-1611-1 L-5560 L-5561	10-14 AWG 10-14 AWG 16-26 AWG 26-30 AWG	45-640	LB-920	24-30 AWG
MIL-W-81044/16/17	45-1611 45-1610	45-1611-1 45-1610-1	10-14 AWG 16-26 AWG	45-2131	45-2131-1	16-24 AWG
MIL-W-81381/1/2/6/7/8/9/10/17/21	45-1609 45-1551 45-178	45-1609-1 45-1551-1 L-5561	10-14 AWG 16-26 AWG 26-30 AWG	45-640	LB-920	24-30 AWG
MIL-W-81381/11/12/13/14/22	45-1608 45-1654 45-178	45-1608-1 45-1654-1 L-5561	10-14 AWG 16-26 AWG 26-30 AWG	45-640	LB-920	24-30 AWG
MIL-W-22759/18/19	45-1608 45-1551	45-1608-1 45-1551-1	10-14 AWG 16-26 AWG	N/A	N/A	N/A
MIL-W-81381/17/21	45-1633	45-1633-1	16-26 AWG	45-2020	45-2020-1	20-26 AWG
MIL-W-81381/18/19/20	45-1609 45-1551	45-1609-1 45-1551-1	10-14 AWG 16-26 AWG	N/A	N/A	N/A
MIL-W-22759/16/17	45-1611 45-1987	45-1611-1 45-1987-1	10-14 AWG 16-26 AWG	45-2133 45-2118	45-2133-1 45-2118-1	16-24 AWG 22-26 AWG
MIL-W-24640/19/22/23/24	45-1957	45-1957-1	14-22 AWG	N/A	N/A	N/A
MIL-W-85485/5/6/7/8	45-1925 45-1924	45-1925-1 45-1924-1	10-14 AWG 16-24 AWG	N/A	N/A	N/A
MIL-W-85485/9/10/11/12 MIL-W-85485/9/10	45-1611 45-1610	45-1611-1 45-1610-1	10-14 AWG 16-24 AWG	45-2131	45-2131-1	16-24 AWG
BMS 1360 Type 1-6, 19-21, 23-27, 33-34	45-2541 42-2543	45-2541-1 45-2543-1	10-14 AWG 16-24 AWG	45-2697	45-2697-1	16-24 AWG
BMS 1360 Type 12-18, 28-32	45-2542 45-2544	45-2542-1 45-2544-1	10-14 AWG 16-24 AWG	N/A	N/A	N/A
BMS 1360 Type 7-12	45-2565 45-2564	45-2565-1 45-2564-1	10-14 AWG 16-26 AWG	N/A	N/A	N/A
MIL-W-22759/80/81/82/91/92	45-2542 45-2544	45-2542-1 45-2544-1	10-14 AWG 16-24 AWG	45-2693 45-2692	45-2693-1 45-2692-1	16-22 AWG 20-26 AWG
MIL-W-22759/83/84/85/86/87/88/89/90	45-2541 45-2543 45-2618	45-2541-1 45-2543-1 45-2618-1	10-14 AWG 16-24 AWG 16-26 AWG	45-2685	45-2685-1	16-24 AWG

NOTE: The above blades represent the best blade for nominal conductor sizes within the wire spec. tolerance. If the conductor size is over or under the nominal dims. an alternate blade may be required. Please contact our wire stripping applications engineer at 1-800-435-0705 ext. 300 for alternate blades and for blade numbers for MIL-specs. not listed on this chart.

Stripmaster® Wire Strippers

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ideal manufacturer](#):

Other Similar products are found below :

[30-582](#) [VDV II PLUS](#) [45-915](#) [45-173](#) [45-098](#) [45-097](#) [L-5361](#) [45-093](#) [45-162](#) [41-990](#) [15DYS618-120150W-3](#) [15DYS624-050400W-K](#) [30-503](#) [35-020](#) [35-060](#) [35-516](#) [45-120](#) [45-1633-1](#) [45-170](#) [45-176](#) [45-1773-1](#) [45-1774](#) [45-1939-1](#) [45-2133-1](#) [45-298](#) [45-372](#) [45-404](#) [K-6336](#) [K-8906R](#) [L-4866](#) [L-9038](#) [LB-1091](#) [35-522](#) [61-775](#) [KB-0276R](#) [25HK-AB-050A400-CP](#) [30-593](#) [30-696](#) [33-856](#) [158050](#) [30-576](#) [45-672](#) [45-292](#) [45-129](#) [LB-1002](#) [30-793](#) [33-864](#) [45-1611-1](#) [R151005](#) [45-1513](#)