


CABLE SPECIFICATION

SPEC NO. : RG6/U DUAL COAXIAL CABLE

Customer No. 24-10220

Construction Item		Unit	Construction Item
Conductors	Construction	mm	1/1.02±0.05
	Material	---	CU
	Filler Material	---	---
	O. D.	mm	1.02±0.05
Insulators	Material	---	Foamed PE
	Diameter	mm	4.57±0.01
	Average Thickness	mm	1.77±0.05
	Colour	---	White
Outer Conductors	AL-PET Foil	um	AL-P-AL
	Type	---	Braid
	Material	---	ALMG
	Coverage	%	60%
	Diameter	mm	4.80±0.15
Jacket	Material	---	PVC (CM)
	Diameter	mm	2*6.90±0.15
	Average Thickness	mm	1.00±0.10
	Extrusion	---	---
	Surface	---	---
	Colour	---	Black
Inking	Inking Colour	---	White
	Inking	---	Stellar Labs DUAL RG6/U TYPE COAX 750HM 18AWG 75degC 2250MHz E188601 (UL) CM RoHS COMPLIANT
Line	Length	ft	500

CONFIGURATION:

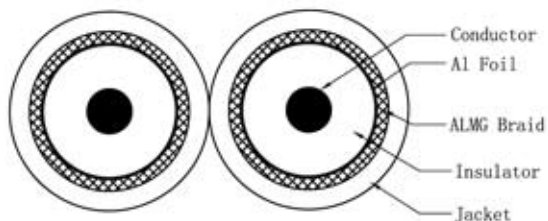

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: X. ±1
 .X ±0.2
 .XX ±0.10
ANGLE: X° . ±1°
 .X° ±0° 30'



UNIT: mm	REV:		NAME	RG6/U DUAL COAXIAL CABLE
DRAWING	XIAOSHENG2008/10/07	S. P. NO.		
CHECK		P. O. NO.	DWG. NO.	
APPROVE		SIZE	PAGE	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [STELLAR LABS](#) manufacturer:

Other Similar products are found below :

[24-15099](#) [24-16210](#) [24-16211](#) [24-10220](#) [JR8306A-3M](#) [555-13890](#) [83-9962](#) [24-15450](#) [24-15453](#) [24-16053](#) [24-16063](#) [24-16135](#) [24-16147](#)
[24-15452](#) [24-15455](#) [24-15942](#) [24-15984](#) [24-15989](#) [24-16012](#) [24-16049](#) [24-833](#) [24-1810](#) [83-16411](#) [10DV-07203-R](#) [24-15411](#) [24-15435](#) [24-15456](#) [24-15396](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15158](#) [24-15951](#) [24-15959](#) [24-16041](#) [24-16058](#) [24-16145](#) [24-1850](#) [24-1830](#) [24-1855](#)
[83-12261](#) [24-12307](#) [24-15418](#) [33-10915](#) [24-10271](#) [24-15413](#) [24-15417](#) [24-15433](#) [24-15439](#) [24-15393](#)