



Main

Range	TeSys
Product name	TeSys D
Product or component type	Contactor
Device short name	LC1D
Contactor application	Motor control Resistive load
Utilisation category	AC-3 AC-1 AC-4
Poles description	3P
Pole contact composition	3 NO
[Ue] rated operational voltage	≤ 300 V DC 25...400 Hz for power circuit ≤ 1000 V AC for power circuit
[Ie] rated operational current	125 A (≤ 60 °C) at ≤ 440 V AC AC-1 for power circuit 95 A (≤ 60 °C) at ≤ 440 V AC AC-3 for power circuit
Motor power kW	45 kW at 660...690 V AC 50/60 Hz AC-3 45 kW at 415...440 V AC 50/60 Hz AC-3 55 kW at 500 V AC 50/60 Hz AC-3 45 kW at 1000 V AC 50/60 Hz AC-3 15 kW at 400 V AC 50/60 Hz AC-4 25 kW at 220...230 V AC 50/60 Hz AC-3 45 kW at 380...400 V AC 50/60 Hz AC-3
Motor power hp	20 hp at 200/208 V AC 50/60 Hz for 3 phases motors 7.5 hp at 115 V AC 50/60 Hz for 1 phase motors 15 hp at 230/240 V AC 50/60 Hz for 1 phase motors 25 hp at 230/240 V AC 50/60 Hz for 3 phases motors 60 hp at 460/480 V AC 50/60 Hz for 3 phases motors 60 hp at 575/600 V AC 50/60 Hz for 3 phases motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	24 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	Conforming to IEC 60947
Overtoltage category	III
[Ith] conventional free air thermal current	125 A at ≤ 60 °C for power circuit 10 A at ≤ 60 °C for signalling circuit
Irms rated making capacity	1100 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	1100 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	1100 A <= 40 °C 1 s power circuit 135 A <= 40 °C 10 min power circuit 400 A <= 40 °C 1 min power circuit 800 A <= 40 °C 10 s power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	160 A gG at <= 690 V coordination type 2 for power circuit 200 A gG at <= 690 V coordination type 1 for power circuit 10 A gG for signalling circuit conforming to IEC 60947-5-1
Average impedance	0.8 mOhm at 50 Hz - Ith 125 A for power circuit
[Ui] rated insulation voltage	1000 V for power circuit conforming to IEC 60947-4-1 600 V for power circuit certifications CSA 600 V for power circuit certifications UL 690 V for signalling circuit conforming to IEC 60947-1 600 V for signalling circuit certifications CSA 600 V for signalling circuit certifications UL
Electrical durability	1.2 Mcycles 95 A AC-3 at Ue <= 440 V 1.3 Mcycles 125 A AC-1 at Ue <= 440 V
Power dissipation per pole	7.2 W AC-3 12.5 W AC-1
Protective cover	With
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	BV CCC RINA GOST GL LROS (Lloyds register of shipping) DNV
Connections - terminals	Control circuit : screw clamp terminals 2 cable(s) 1...2.5 mm ² - cable stiffness: flexible - with cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end Control circuit : screw clamp terminals 1 cable(s) 1...2.5 mm ² - cable stiffness: flexible - with cable end Power circuit : connector 1 cable(s) 4...50 mm ² - cable stiffness: flexible - without cable end Power circuit : connector 2 cable(s) 4...25 mm ² - cable stiffness: flexible - without cable end Power circuit : connector 1 cable(s) 4...50 mm ² - cable stiffness: flexible - with cable end Power circuit : connector 2 cable(s) 4...16 mm ² - cable stiffness: flexible - with cable end Power circuit : connector 1 cable(s) 4...50 mm ² - cable stiffness: solid - without cable end Power circuit : connector 2 cable(s) 4...25 mm ² - cable stiffness: solid - without cable end
Tightening torque	Power circuit : 9 N.m - on connector - with screwdriver flat Ø 6 to Ø 8 mm Power circuit : 9 N.m - on connector hexagonal 4 mm Control circuit : 1.2 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit : 1.2 N.m - on screw clamp terminals - with screwdriver Philips No 2
Operating time	20...35 ms closing 6...20 ms opening
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	4 Mcycles
Operating rate	3600 cyc/h at <= 60 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.85...1.1 Uc operational at 55 °C, AC 60 Hz 0.3...0.6 Uc drop-out at 55 °C, AC 50/60 Hz 0.8...1.1 Uc operational at 55 °C, AC 50 Hz
Inrush power in VA	245 VA at 20 °C (cos ϕ 0.75) 60 Hz 245 VA at 20 °C (cos ϕ 0.75) 50 Hz
Hold-in power consumption in VA	26 VA at 20 °C (cos ϕ 0.3) 60 Hz 26 VA at 20 °C (cos ϕ 0.3) 50 Hz
Heat dissipation	6...10 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm for signalling circuit


Environment

IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	-5...60 °C
Ambient air temperature for storage	-60...80 °C
Permissible ambient air temperature around the device	-40...70 °C at Uc
Operating altitude	3000 m without derating in temperature
Fire resistance	850 °C conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Shocks contactor open 8 Gn for 11 ms Vibrations contactor closed 3 Gn, 5...300 Hz Shocks contactor closed 10 Gn for 11 ms
Height	127 mm
Width	85 mm
Depth	130 mm
Product weight	1.61 kg

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions

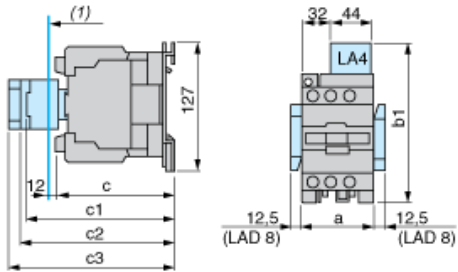

(1) Minimum electrical clearance

LC1		D80	D95
a		85	85
b1	with LA4 D•2	135	135
with LA4 DB3 or LAD 4BB3	135	–	
with LA4 DF, DT	142	142	
with LA4 DM, DW, DL	150	150	
c	without cover or add-on blocks	125	125
with cover, without add-on blocks	130	130	
c1	with LAD N (1 contact)	150	150
with LAD N or C (2 or 4 contacts)	158	158	
c2	with LA6 DK10, LAD 6DK	170	170
c3	with LAD T, R, S	178	178
with LAD T, R, S and sealing cover	182	182	

Wiring



Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power 45 kW and 415 VAC

Motor power (kW)	ICU (kA)	Breaker	Contactor (*)
45	36	 GV7RE100	 LC1D95B7

Non contractual pictures.

Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [schneider manufacturer](#):

Other Similar products are found below :

[LU9M1](#) [7D](#) [7S](#) [7XA1](#) [FNQR2](#) [8501RS44V24](#) [8501RSD14P14V51](#) [8501XO20V03Y414](#) [9001KXRK](#) [9001SKR9P35RH25](#) [9001SKT35L31](#)
[9003K2C003GA](#) [9007AA1](#) [9007BA1](#) [9007C54D](#) [9007C62A2](#) [9007CA11](#) [9007FA3](#) [9007HA4](#) [9007HA6](#) [9007KA1](#) [9007KB11](#)
[9007MS01S0206](#) [9007MS02S0300](#) [9012GAR4](#) [9012GAW2](#) [9012GBW1](#) [9012GDW5E3](#) [9012GFW1](#) [9012GNG1](#) [9012GNG3](#) [9012GNG6](#)
[9013FHG39J69](#) [9013GHG2J30](#) [9050JCK2F30V14](#) [GV2P10](#) [GVAN20](#) [GZ1E02](#) [A9F04616](#) [ABL8RPS24030](#) [RMPT20BD](#) [ATS01N206QN](#)
[CAD32BD](#) [CAD32F7](#) [CAD50BD](#) [CAD50P7](#) [RSL1PRJU](#) [9001KA35](#) [9001KA3G](#) [9001KA4](#)