


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0015800203**
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Header, Through Hole without Peg, Dual Row, Vertical, Shrouded, High Temperature, 20 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-70567-001 \(PDF\)](#)
[Packaging Specification PK-70873-0018 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

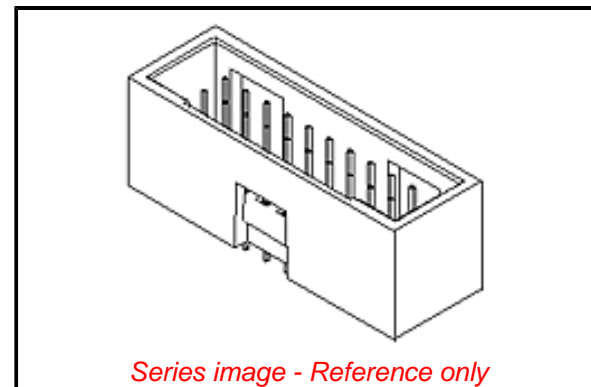

Agency Certification

UL E29179

General

Product Family PCB Headers
Series [70567](#)
Application Signal, Wire-to-Board
Overview [C-Grid Connector Products](#)
Product Name C-Grid
UPC 800755031225

Physical

Breakaway No
Circuits (Loaded) 20
Circuits (maximum) 20
Color - Resin Black
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal Brass, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 3.471/g
Number of Rows 2
Orientation Vertical
PC Tail Length 3.30mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 2.40mm
Packaging Type Tube
Pitch - Mating Interface 2.54mm
Pitch - Termination Interface 2.54mm
Plating min - Mating 0.381µm
Plating min - Termination 1.905µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Fully
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55° to +105°C
Termination Interface: Style Through Hole

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[70567 Series](#)

Mates With

SL Crimp Housing [70450](#) , C-Grid PCB Receptacle [71395](#)

Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245

Material Info

Engineering Number	A-70567-0076
--------------------	--------------

Reference - Drawing Numbers

Packaging Specification	PK-70873-0018
Product Specification	PS-70567-001
Sales Drawing	SDA-70567-XXXX

This document was generated on 11/26/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)