

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022282052](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: KK 254 Breakaway Header, Right-Angle, with Plastic Polarizing Peg, 5 Circuits, 0.38µm Gold (Au) Selective Plating
Replacement Part Number: <http://www.molex.com/molex/products/listview.jsp?channel=Products&sType=p&query=002228105122-28-1051> see comments

Documents:

[3D Model](#) [Product Specification PS-10-07-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [42226](#)
 Application Signal, Wire-to-Board
 Application Tooling Part Link 11-20-1230
 Comments Original part has a polarized backwall, replacement has friction lock backwall. Pin length of FKL header is .750" vs. .670" of polarized version. Plating and other dimensions are same.
 Overview [KK® Interconnect System - Molex](#)
 Product Name KK 254
 Replacement Part Number [22-28-1051](#) see comments
 UPC 800754385077

Physical

Breakaway Yes
 Circuits (Loaded) 5
 Circuits (maximum) 5
 Color - Resin Black
 Durability (mating cycles max) 100
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin Nylon
 Net Weight 0.676/g
 Number of Rows 1
 Orientation Right Angle
 PC Tail Length 3.05mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 2.54mm
 Plating min - Mating 0.381µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part No
 Polarized to PCB No
 Shrouded No

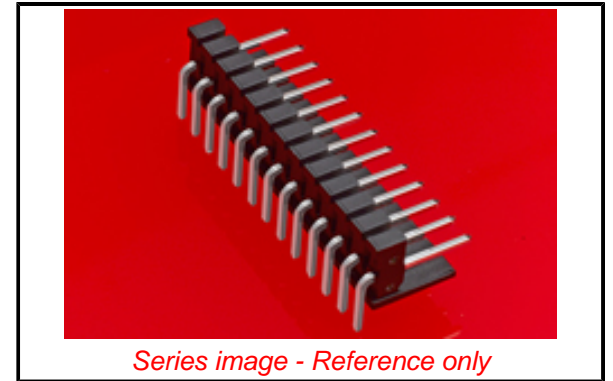

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42226](#) Series

Mates With

KK Crimp Housing [2695](#) , [6471](#) , [7880](#) , KK PC Board Connector [4455](#)

Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	4.0A
Voltage - Maximum	500V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Engineering Number	42226-0040
Reference - Drawing Numbers	
Product Specification	PS-10-07-001
Sales Drawing	SD-42226-001, SD-42226-001-002

This document was generated on 09/18/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [67230-005LF](#)