



Table of Contents

Z-PACK TinMan High Speed, High Density Backplane Connector 5-48

 Introduction 6-8

 6 Pair Right Angle Receptacle Assemblies 9

 5 Pair Right Angle Receptacle Assemblies 10

 4 Pair Right Angle Receptacle Assemblies 11

 3 Pair Right Angle Receptacle Assemblies 12

 4 Pair Vertical Receptacle Assemblies 13

 6 Pair Vertical Header Assemblies 14

 6 Pair Vertical Header Assemblies — Left End Wall 15

 6 Pair Vertical Header Assemblies — Right End Wall 16

 6 Pair Vertical Header Assemblies — Double End Walls 17

 5 Pair Vertical Header Assemblies 18

 5 Pair Vertical Header Assemblies — Left End Wall 19

 5 Pair Vertical Header Assemblies — Right End Wall 20

 5 Pair Vertical Header Assemblies — Double End Walls 21

 4 Pair Vertical Header Assemblies 22

 4 Pair Vertical Header Assemblies — Left End Wall 23

 4 Pair Vertical Header Assemblies — Right End Wall 24

 4 Pair Vertical Header Assemblies — Double End Walls 25

 3 Pair Vertical Header Assemblies 26

 3 Pair Vertical Header Assemblies — Left End Wall 27

 3 Pair Vertical Header Assemblies — Right End Wall 28

 3 Pair Vertical Header Assemblies — Double End Walls 29

 5 Pair Right Angle Pin Header Assemblies 30

 5 Pair Right Angle Pin Header Assemblies — Double End Walls 31

 4 Pair Right Angle Pin Header Assemblies 32

 4 Pair Right Angle Pin Header Assemblies — Double End Walls 33

 3 Pair Right Angle Pin Header Assemblies 34

 3 Pair Right Angle Pin Header Assemblies — Double End Walls 35

 Z-PACK TinMan Midplane (Orthogonal) Connector Overview 36-38

 6 Pair Midplane Assemblies 39-45

 Z-PACK TinMan Product Mating Sequence Chart 46

1

Z-PACK TinMan High Speed, High Density Backplane Connector






Introduction

Product Facts

- 10+ Gbps performance
- 100 ohm Impedance for Differential Pair configuration
- 5 pair version offers 26 pairs/10mm [66 differential pairs/inch] fitting within a 25.40 [1.00] card slot pitch
- 4 pair version offers 21 pairs/10mm [53 differential pairs/inch] fitting within a 20.30 [.800] card slot pitch
- 3 pair version offering 16 pairs/10mm [40 differential pairs/inch] fitting within a 16.25 [.625] card slot pitch
- Right angle pin headers (coplanar) in 3 pair, 4 pair, and 5 pair versions
- Reliable, redundant contact design on every signal contact
- Modular system offered in various column versions
- Meets Industry reliability requirements of Bellcore/Telcordia
- Sequencing for ground and signal contacts
- RoHS Compliant

Future Product Extensions

- Vertical receptacles
- High speed cable assemblies and hardware

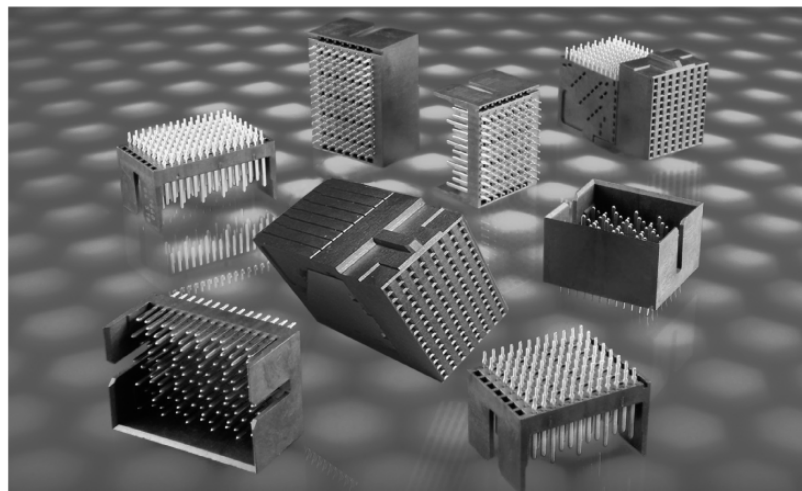

The Z-PACK TinMan backplane connector family is a cost-effective solution for customers searching for a high density, high performance backplane interconnect system.

The Z-PACK TinMan connector design follows proven industry backplane convention by offering a fully protected right-angle receptacle for use on daughter-cards where handling damage can be a concern when mating to a vertical male header. This connector permits field repairability at either the module or single pin levels.

Ground contacts positioned within each column of the connector, combined with unique contact lead frame arrangements, enable the Z-PACK TinMan connector to achieve low crosstalk and high through-put performance levels. Reliability is provided with a dual point of contact mating interface and compliant pin interface to the printed circuit board.

Industry Applications

Ideally designed for cost pressured, high signal density applications requiring interconnection between two printed circuit boards, such as those typically found in server, storage, switch, router, and similar applications. The Z-PACK TinMan connector product family is suited to meet the demands of today's modular system designs by offering a variety of configurations. The product family includes configurations to fit 20.32 [.800] and 25.40 [1.00] card slot spacing.

Technical Documents

Product Specification 108-2303
Application Specification 114-13202
Routing Guide Report #27GC001-1

Material and Finish

Signal Contact — High Strength Copper Alloy
Ground Contact — High Strength Copper Alloy
Housing — Liquid Crystal Polymer, UL 94V-0 Rated
Platings — Telcordia compliant interface, Nickel underplate
Compliant Pin Plating — RoHS Compliant

Ratings

Temperature Range — -65°C to +90°C
Current Rating — 0.5 A/contact @ < 30°C T-Rise
Durability — 200 cycles
Dielectric Withstanding Voltage — 560 VAC
Operating Voltage — 250 VAC max.

Signal Integrity

Characteristic Impedance — Differential @ 100 ohms ±10%
Crosstalk — Multi-pair differential crosstalk: 2.1% @ 50ps
Insertion Loss — -2 dB @ 10 GHz

TELCORDIA is a trademark of Telcordia Technologies, Inc.

For additional information visit:
<http://www.tycoelectronics.com/zpacktinman>

6

Catalog 1773095
 Revised 12-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are U.S. equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
 Canada: 1-905-470-4425
 Mexico: 01-800-733-8926
 C. America: 52-55-1106-0803

South America: 55-11-2103-6000
 Hong Kong: 852-2735-1628
 Japan: 81-44-844-8013
 UK: 44-8706-080-208



K

Tyco Electronics High Speed Backplane Connectors

Introduction (Continued)

Noise Table

■ Maximum, multiple source crosstalk

| Victim Pair | Total Peak Receiver Noise for Recommended Pin-Out |
|-------------|---|
| AB9 | 0.8% |
| BC8 | 1.6% |
| DE9 | 1.9% |
| EF8 | 1.9% |
| GH9 | 2.0% |
| HI8 | 2.0% |
| JG9 | 2.0% |
| KL8 | 2.1% |
| MN9 | 1.7% |
| NO8 | 0.8% |

Note: Data includes PCB vias of both backplane and daughtercard connectors. Single mated connector pair 50 ps (20-80%) edge rate

The diagram shows three rows of connector pins labeled Row H, Row I, Row J, Row K, Row L, Row M, Row N, and Row O. A central row of pins is highlighted with arrows pointing to it from the rows above and below. A key on the right identifies three types of pins: TX Victim (a single pin in a shaded box), TX Aggressor (two pins in a shaded box), and RX Aggressor (two pins in a shaded box).

Insertion Loss Plot

The plot shows the insertion loss in dB for various connector pairs from 0.0 to 10.0 GHz. The y-axis ranges from 0.0 to -10.0 dB, and the x-axis ranges from 0.0 to 10.0 GHz. The legend includes: Pair AB, Pair BC, Pair DE, Pair EF, Pair GH, Pair HI, Pair JK, Pair KL, Pair MN, and Pair NO. The plot shows that insertion loss is generally between -1.0 and -2.0 dB across the frequency range.

1

Z-PACK TinMan High Speed, High Density Backplane Connector

Catalog 1773095
Revised 12-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are U.S. equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-1106-0803

South America: 55-11-2103-6000
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080-208


7

Black ID: GARRYV



Introduction (Continued)

Representative Eye Pattern



- 10.0 Gbps data rate
- 2⁷-1 PRBS
- Unequalized Signal

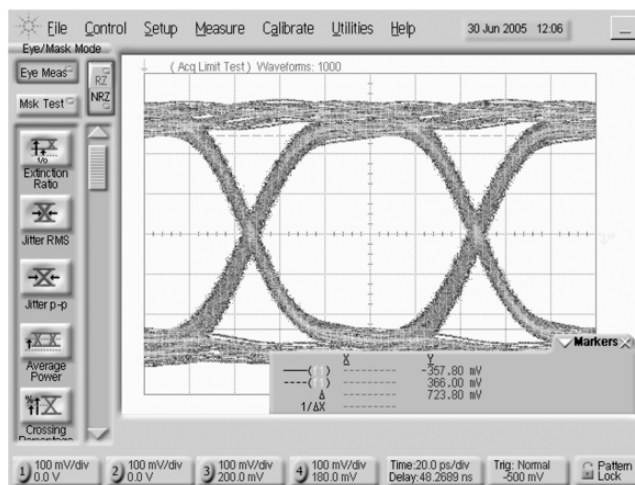
**Customer Connector
Evaluation Kit**

- Connector characterization
- Available for loan — contact your local Tyco Electronics Sales Engineer
- Time and frequency domain testable
- Testable to 18+ GHz (25+ Gb/s)
- Multiple calibration options
- Convenient SMA interface

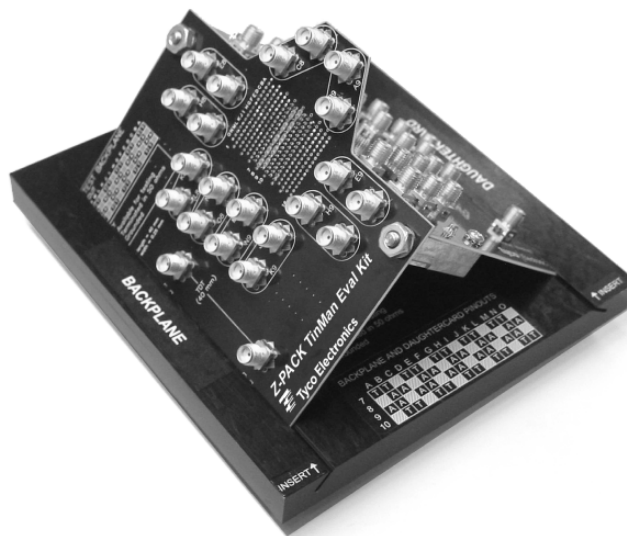
**Customer System
Evaluation Kit**

- System characterization
- Available for loan — contact your local Tyco Electronics Sales Engineer
- Time and frequency domain testable
- Testable to 18+ GHz (25+ Gb/s)
- Multiple system lengths
- Convenient SMA interface


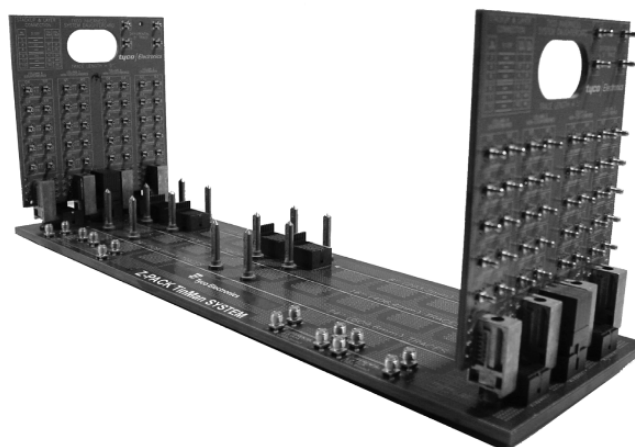




6 Pair Right Angle Receptacle Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|---|
| | | A | B | | |
| 8 | 1934504-1 | 15.35 .604 | 13.30 .524 | * | 1934505-1, 1934513-1, 1934514-1, 1934515-1 |
| 10 | 2065021-1 | 19.15 .754 | 17.10 .673 | * | 1934520-1, 1934523-1 |
| 16 | 1934912-1 | 30.55 1.203 | 28.50 1.122 | * | 1934516-1, 1934519-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

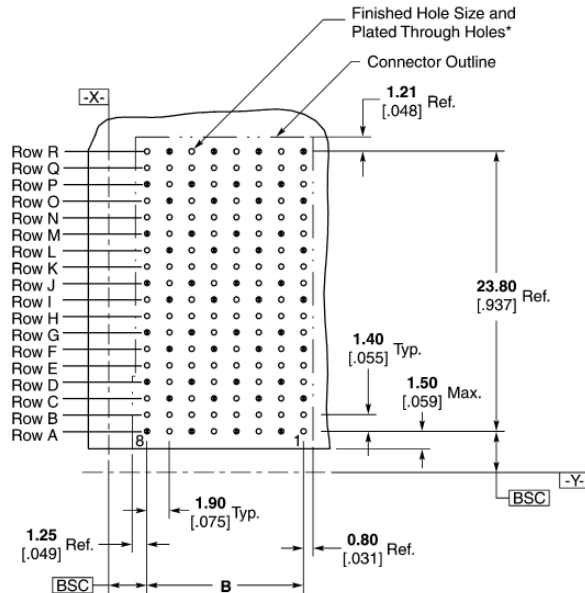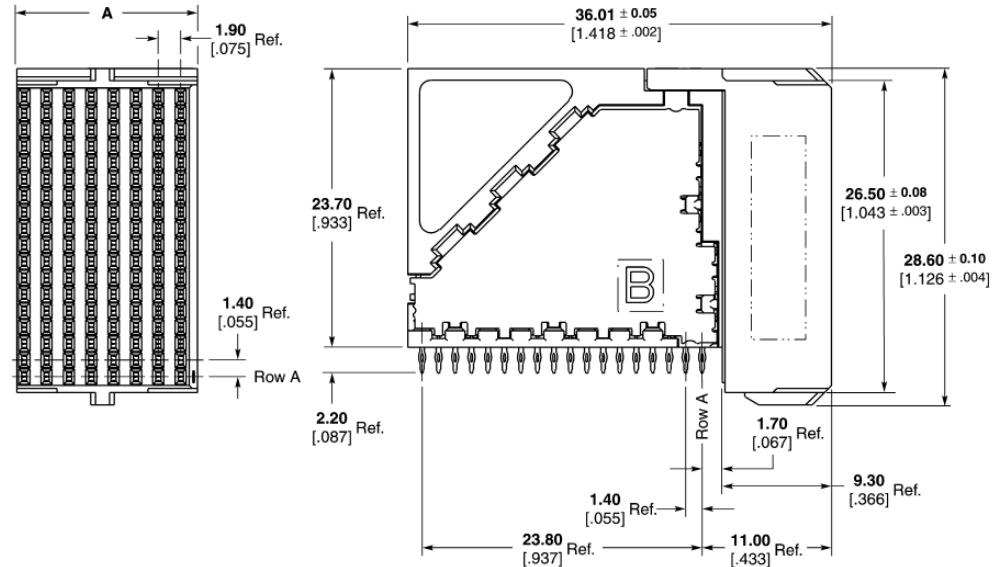

**Recommended PC Board Layout
Daughterboard
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.





Z-PACK TinMan High Speed, High Density Backplane Connector



5 Pair Right Angle Receptacle Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|---|
| | | A | B | | |
| 8 | 1934218-1 | 15.35 .604 | 13.30 .524 | * | 1934269-1,(R) 1934272-1,(L) 1934273-1, 1934271-1, 1934349-1, 1934350-1 |
| 10 | 1934220-1 | 19.15 .754 | 17.10 .673 | * | 1934325-1, 1934326-1 |
| 16 | 1934221-1 | 30.55 1.203 | 28.50 1.122 | * | 1934331-1, 1934334-1, 1934333-1, 1934332-1, 1934347-1, 1934348-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

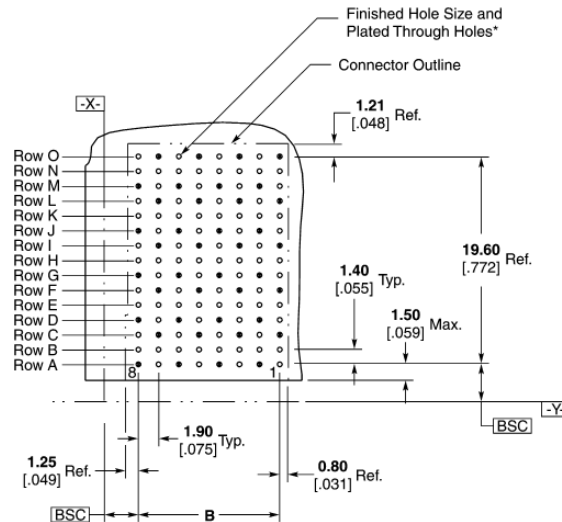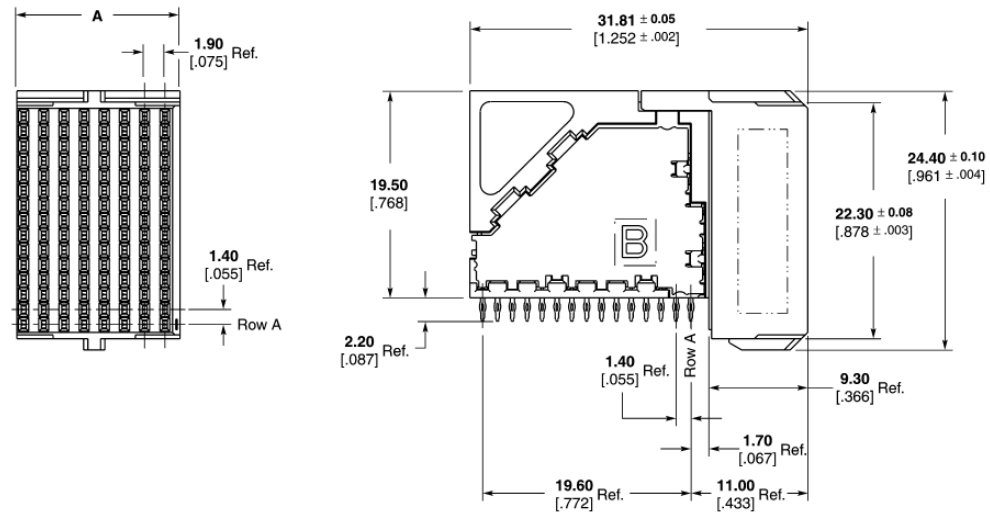

**Recommended PC Board Layout
Daughterboard
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK Tin-Man Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



4 Pair Right Angle Receptacle Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|---|
| | | A | B | | |
| 8 | 1934222-1 | 15.35 .604 | 13.30 .524 | * | 1934304-1, 1934303-1, 1934305-1, 1934306-1, 1934353-1, 1934354-1 |
| 10 | 1934224-1 | 19.15 .754 | 17.10 .673 | * | 1934311-1, 1934312-1, 1934313-1, 1934314-1 |
| 16 | 1934225-1 | 30.55 1.203 | 28.50 1.122 | * | 1934315-1, 1934318-1, 1934317-1, 1934316-1, 1934351-1, 1934352-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

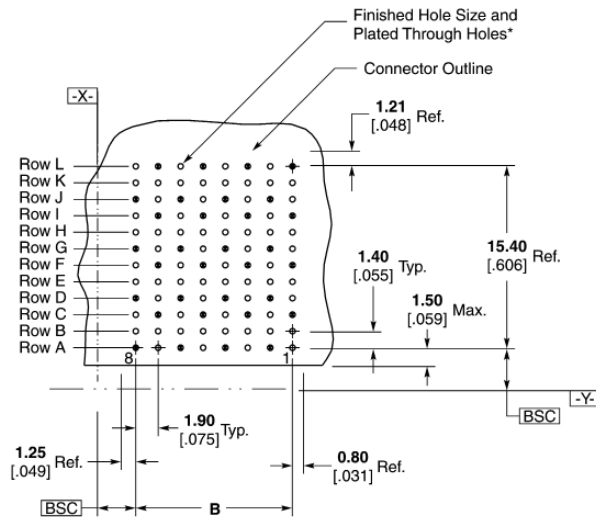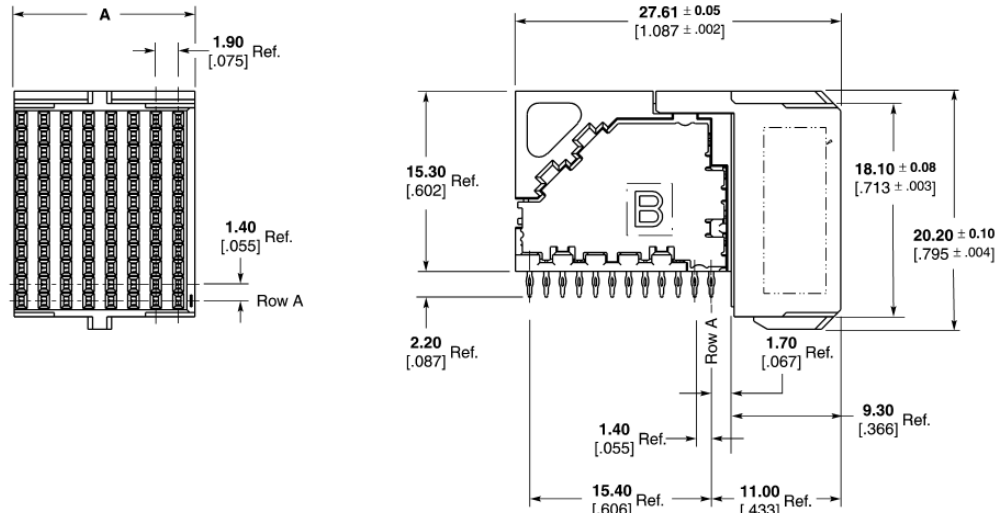

**Recommended PC Board Layout
Daughterboard
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

1
Z-PACK TinMan High Speed, High Density Backplane Connector

3 Pair Right Angle Receptacle Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|---|
| | | A | B | | |
| 8 | 1934226-1 | 15.35 .604 | 13.30 .524 | * | 1934299-1, 1934300-1, 1934301-1, 1934302-1, 1934359-1, 1934360-1 |
| 10 | 1934228-1 | 19.15 .754 | 17.10 .673 | * | 1934339-1, 1934341-1, 1934340-1, 1934342-1, 1934357-1, 1934358-1 |
| 16 | 1934229-1 | 30.55 1.203 | 28.50 1.122 | * | 1934343-1, 1934344-1, 1934345-1, 1934346-1, 1934355-1, 1934356-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

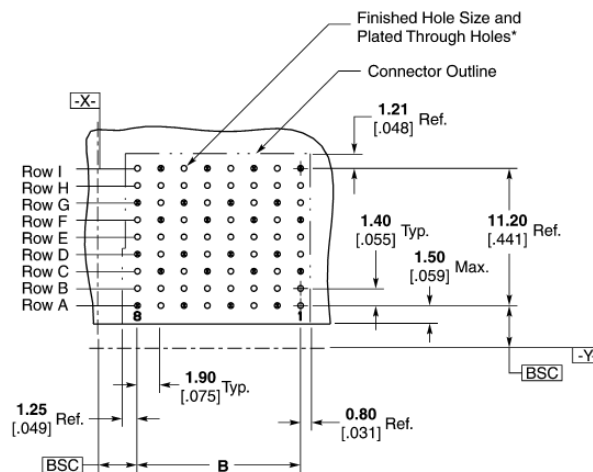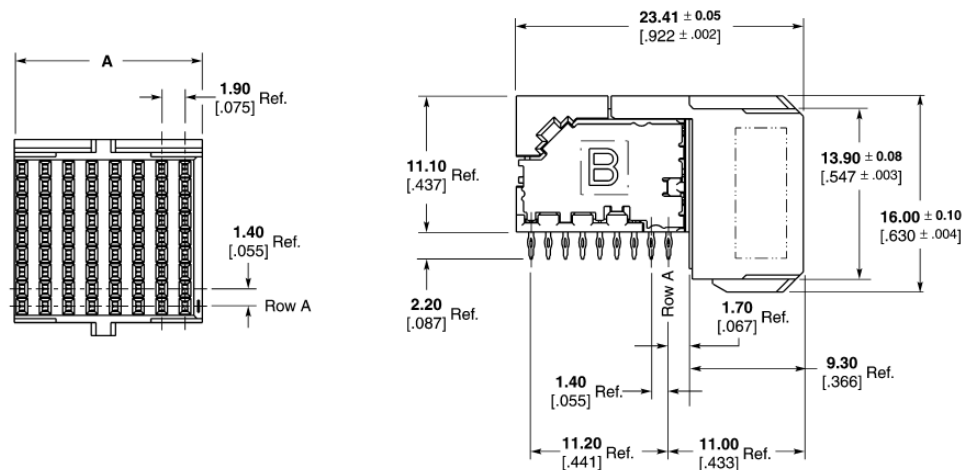


**Recommended PC Board Layout
Daughterboard
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



4 Pair Vertical Receptacle Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|---|
| | | A | B | | |
| 8 | 1934593-1 | 15.35 .605 | 13.30 .524 | * | 1934305-1, 1934303-1, 1934304-1, 1934306-1, 1934353-1, 1934354-1 |
| 10 | 1934544-1 | 19.15 .754 | 17.10 .673 | * | 1934311-1, 1934313-1, 1934314-1, 1934312-1 |
| 16 | 1934594-1 | 30.70 1.210 | 28.50 1.122 | * | 1934315-1, 1934317-1, 1934318-1, 1934316-1, 1934351-1, 1934352-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

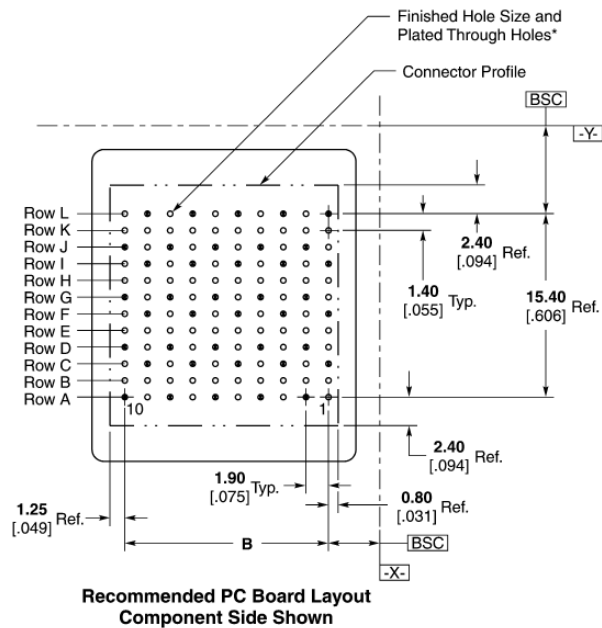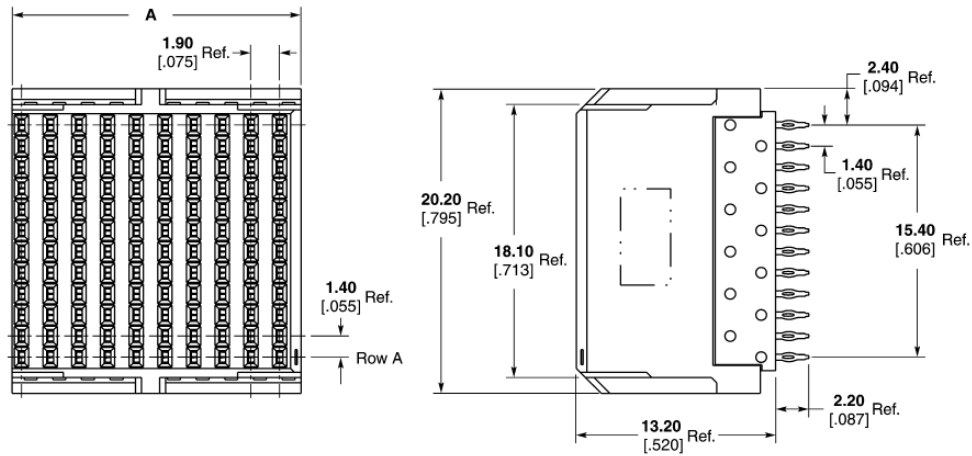

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.



* Finished Hole Diameter = 0.46 ± 0.05 [.018 \pm .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 \pm .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 \pm .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 \pm .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

1
Z-PACK TinMan High Speed, High Density Backplane Connector

6 Pair Vertical Header Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934505-1 | 15.35 .604 | 13.30 .524 | 2063383-1 | 1934504-1 |
| 10 | 1934520-1 | 19.15 .754 | 17.10 .673 | 2063383-2 | 2065021-1 |
| 16 | 1934516-1 | 30.55 1.203 | 28.50 1.122 | 2063383-3 | 1934912-1 |

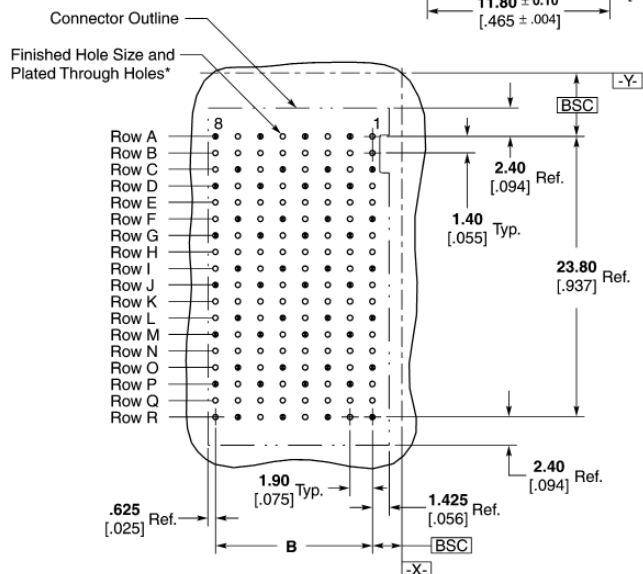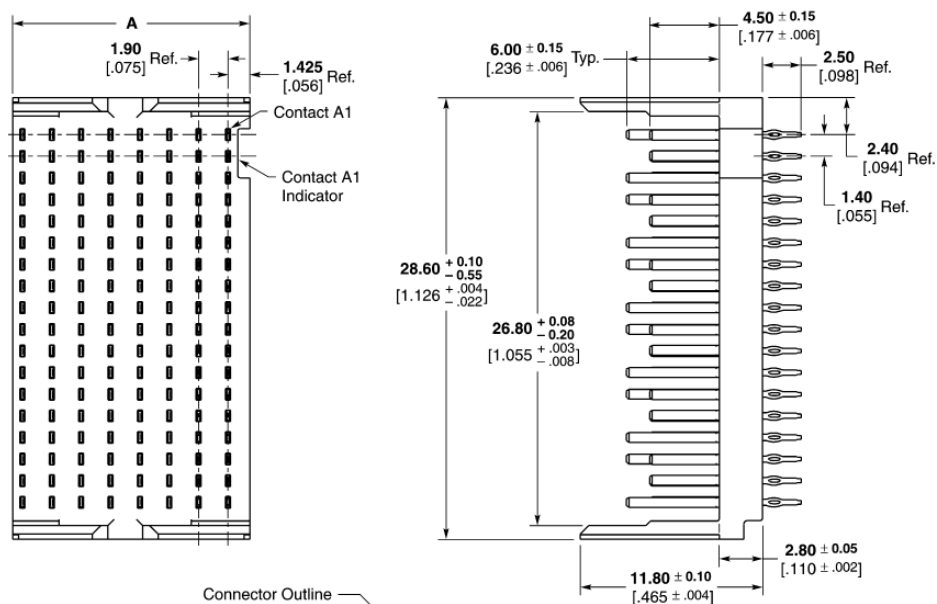

Recommended PC Board Layout Backplane Component Side Shown

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

6 Pair Vertical Header Assemblies — Left End Wall

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|---------------|---------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934513-1 | 16.30 .642 | 13.30 .524 | 2063383-1 | 1934504-1 |



Z-PACK TinMan High Speed, High Density Backplane Connector

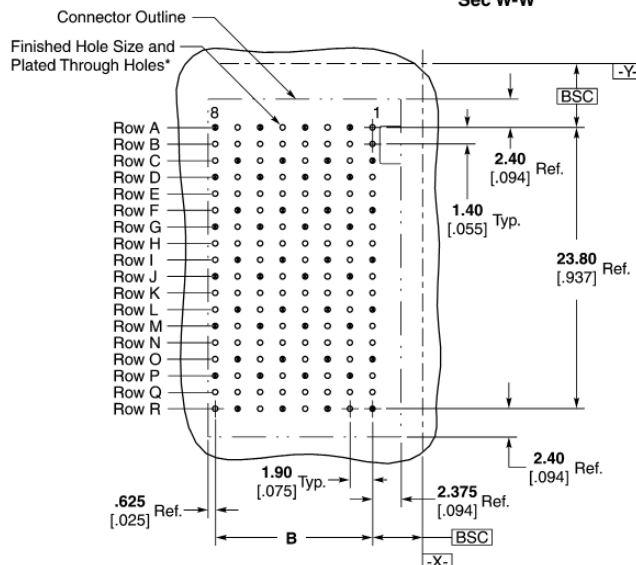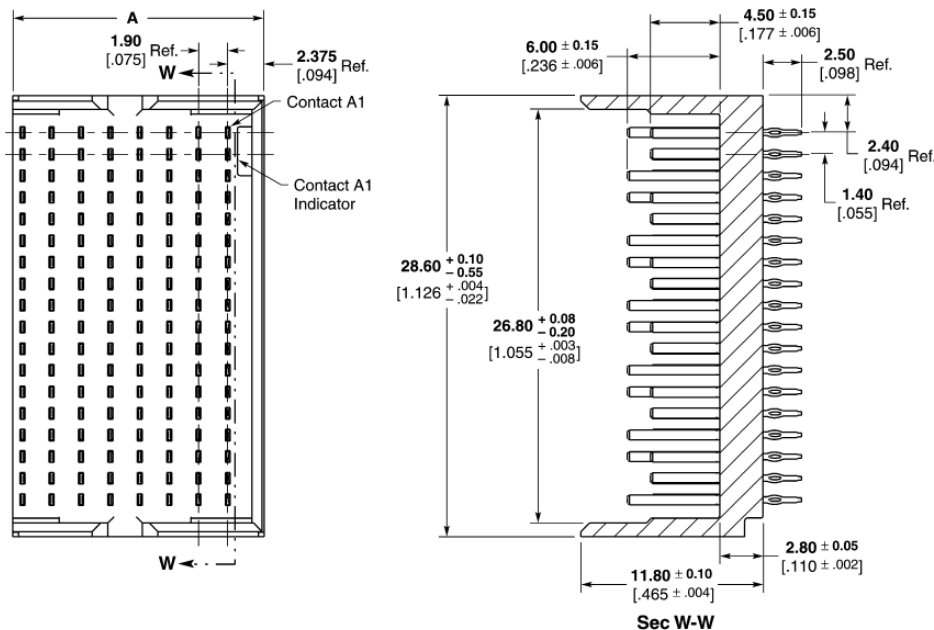

Recommended PC Board Layout Backplane Component Side Shown



Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [$0.018 \pm .002$]
 Drilled Hole Diameter = 0.55 ± 0.02 [$0.022 \pm .001$]
 Copper Thickness = 0.038 ± 0.013 [$0.0015 \pm .0005$]
 Tin-Lead Thickness = 0.008 ± 0.004 [$0.0003 \pm .0002$]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

6 Pair Vertical Header Assemblies — Right End Wall

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|---------------|---------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934514-1 | 17.60 .693 | 13.30 .524 | 2063383-1 | 1934504-1 |

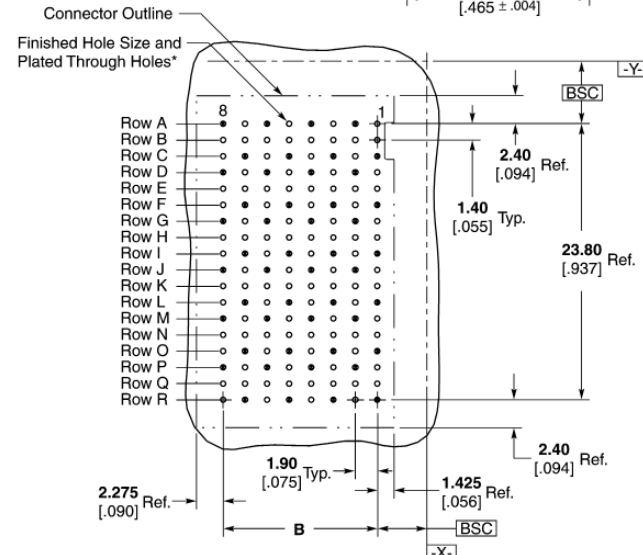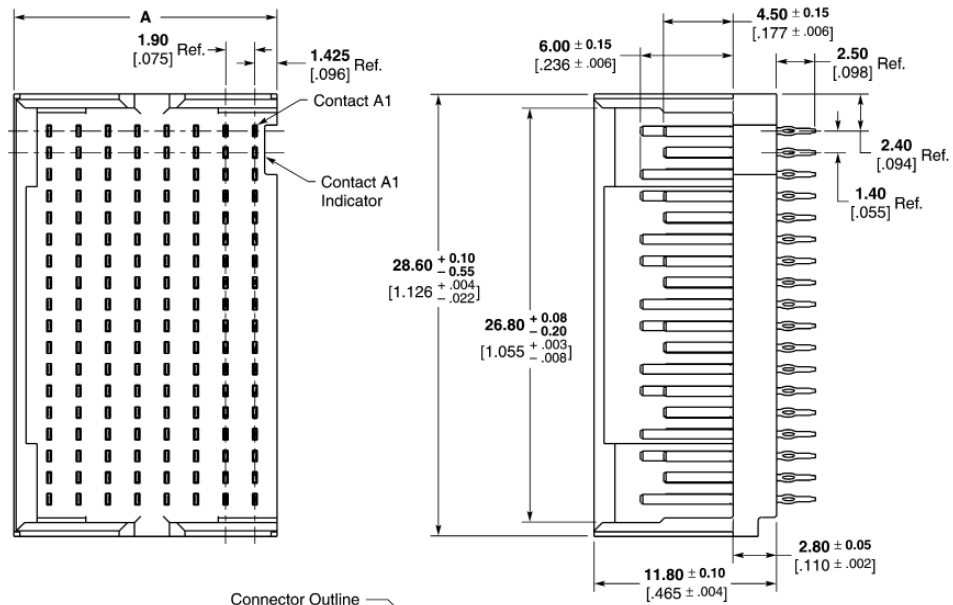

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [$0.018 \pm .002$]
 Drilled Hole Diameter = 0.55 ± 0.02 [$0.022 \pm .001$]
 Copper Thickness = 0.038 ± 0.013 [$0.0015 \pm .0005$]
 Tin-Lead Thickness = 0.008 ± 0.004 [$0.0003 \pm .0002$]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







6 Pair Vertical Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934515-1 | 17.95 .707 | 13.30 .524 | 2063383-1 | 1934504-1 |
| 10 | 1934523-1 | 21.75 .856 | 17.10 .673 | 2063383-2 | 2065021-1 |
| 16 | 1934519-1 | 33.15 1.305 | 28.50 1.122 | 2063383-3 | 1934912-1 |



Z-PACK TinMan High Speed, High Density Backplane Connector

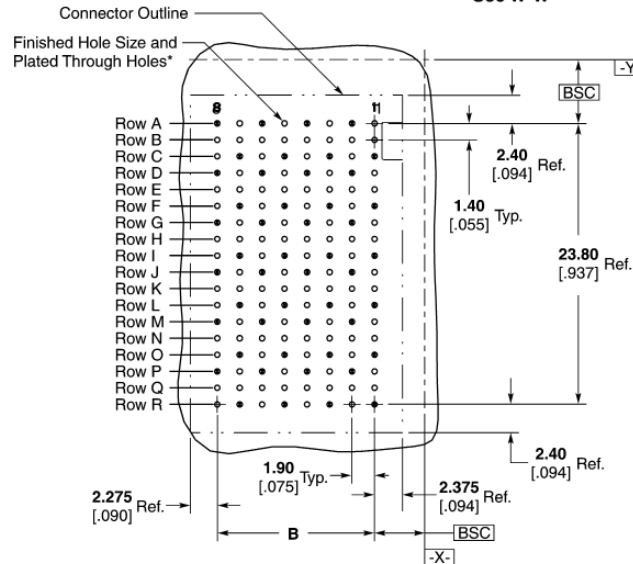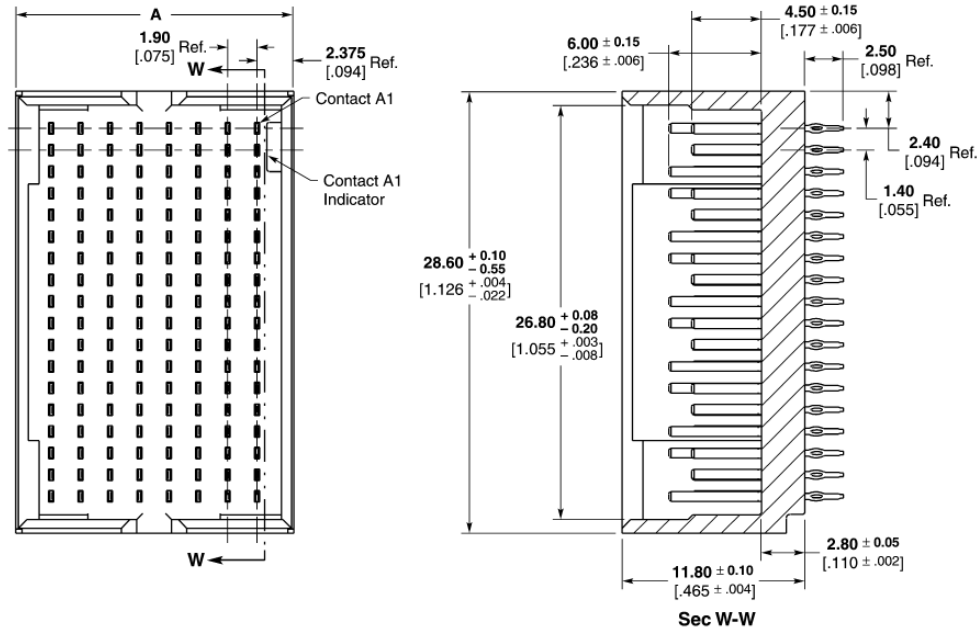

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







5 Pair Vertical Header Assemblies — Left End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934272-1 | 16.30 .642 | 13.30 .524 | 1-1804791-1 | 1934218-1 |
| 16 | 1934333-1 | 31.50 1.240 | 28.50 1.122 | 1-1804791-3 | 1934221-1 |

* Reference Application Specification 114-13202.

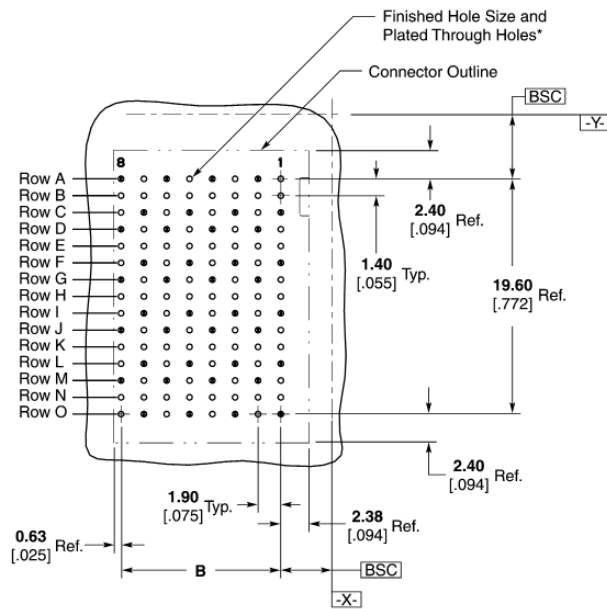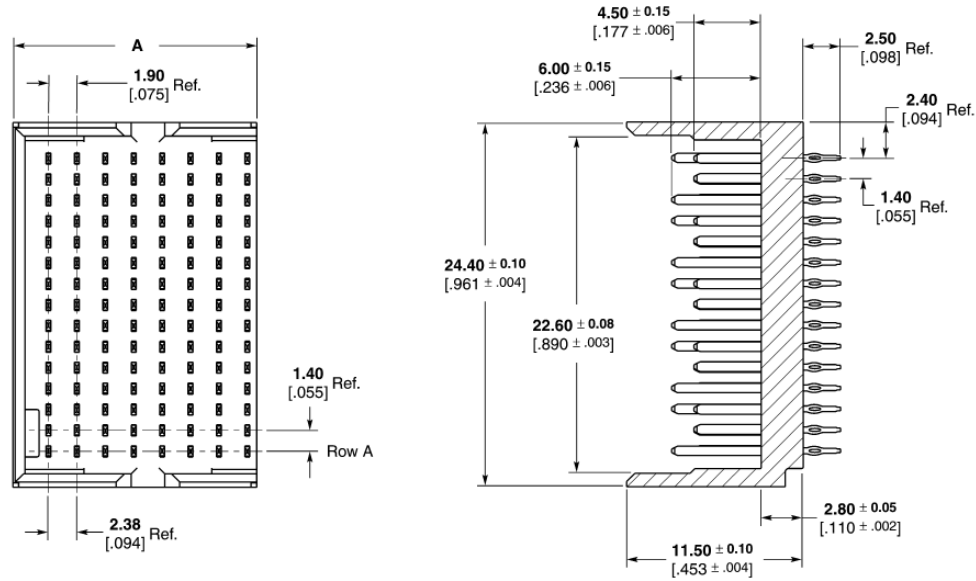

Recommended PC Board Layout Backplane Component Side Shown

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± 0.002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± 0.001]
 Copper Thickness = 0.038 ± 0.013 [0.015 ± 0.005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.003 ± 0.002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.





Z-PACK TinMan High Speed, High Density Backplane Connector



5 Pair Vertical Header Assemblies — Right End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934273-1 | 17.00 .669 | 13.30 .524 | 1-1804791-1 | 1934218-1 |
| 16 | 1934334-1 | 32.20 1.268 | 28.50 1.122 | 1-1804791-3 | 1934221-1 |

* Reference Application Specification 114-13202.

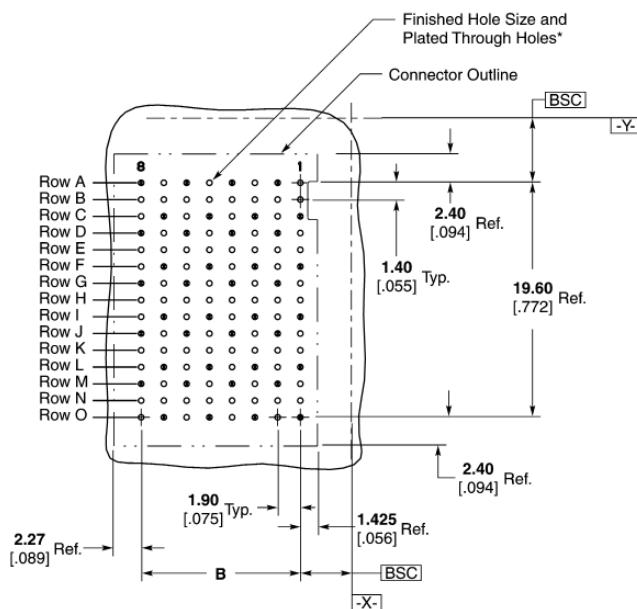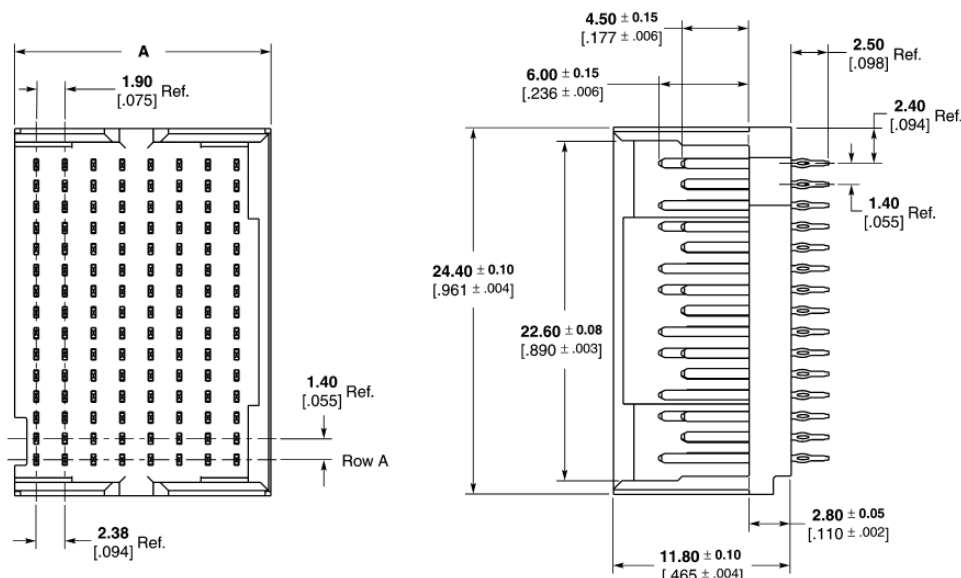

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.18 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.22 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







5 Pair Vertical Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934271-1 | 17.95 .707 | 13.30 .524 | 1-1804791-1 | 1934218-1 |
| 10 | 1934326-1 | 21.75 .856 | 17.10 .673 | 1-1804791-7 | 1934220-1 |
| 16 | 1934332-1 | 33.15 1.305 | 28.50 1.122 | 1-1804791-3 | 1934221-1 |

* Reference Application Specification 114-13202.

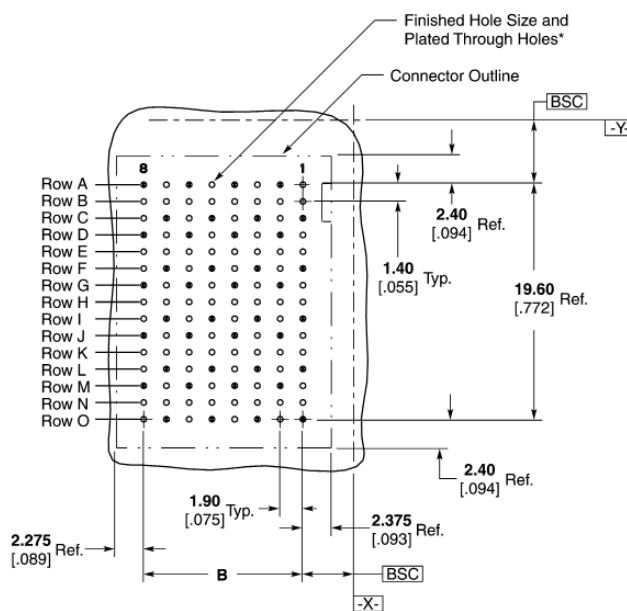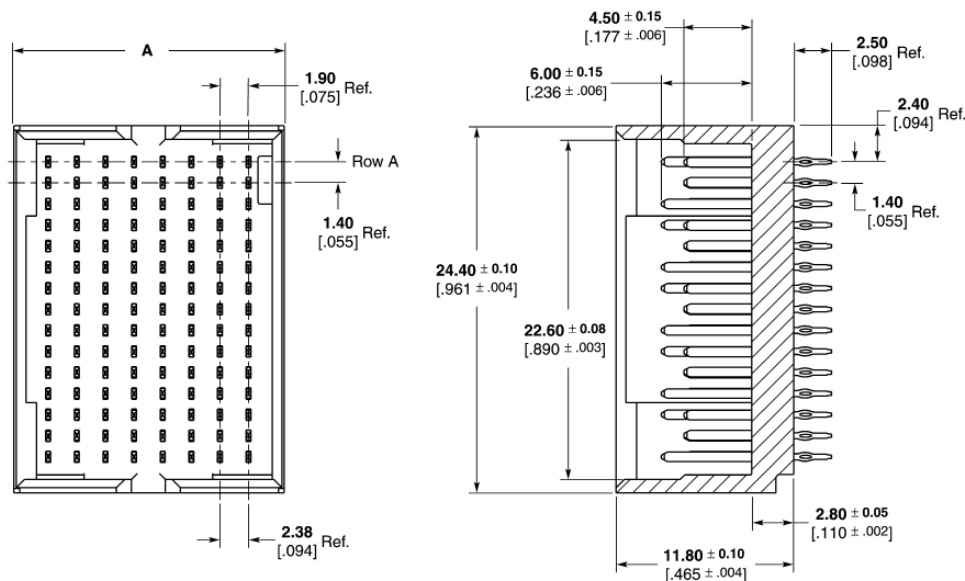

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Z-PACK TinMan High Speed, High Density Backplane Connector







4 Pair Vertical Header Assemblies — Left End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934303-1 | 17.00 .669 | 13.30 .524 | 1-1804790-1 | 1934222-1 |
| 16 | 1934317-1 | 31.50 1.240 | 28.50 1.122 | 1-1804790-3 | 1934225-1 |

* Reference Application Specification 114-13202.

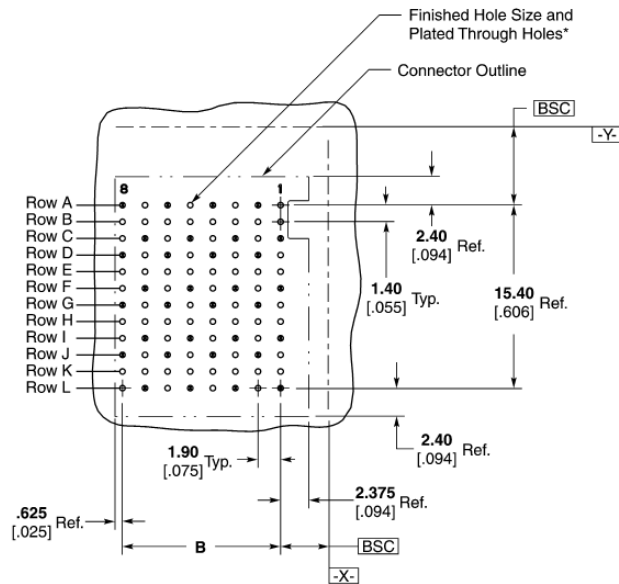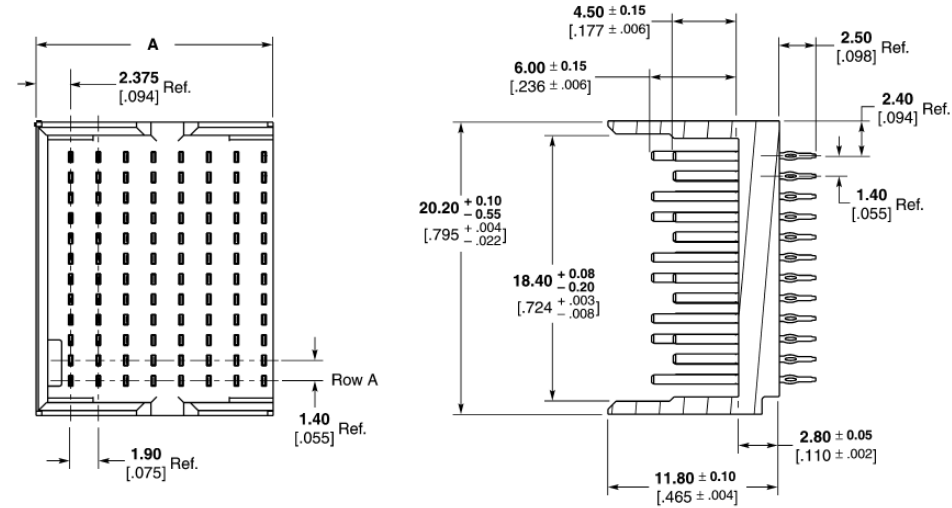

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.





Z-PACK TinMan High Speed, High Density Backplane Connector



4 Pair Vertical Header Assemblies — Right End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934304-1 | 16.30 .642 | 13.30 .524 | 1-1804790-1 | 1934222-1 |
| 16 | 1934318-1 | 32.20 1.268 | 28.50 1.122 | 1-1804790-3 | 1934225-1 |

* Reference Application Specification 114-13202.

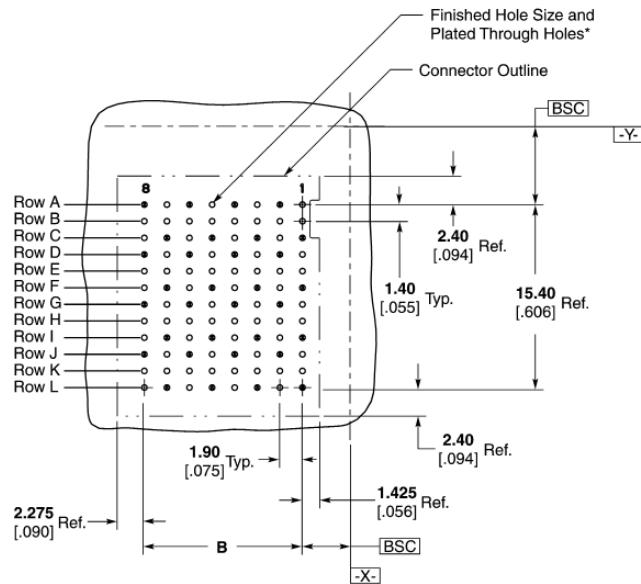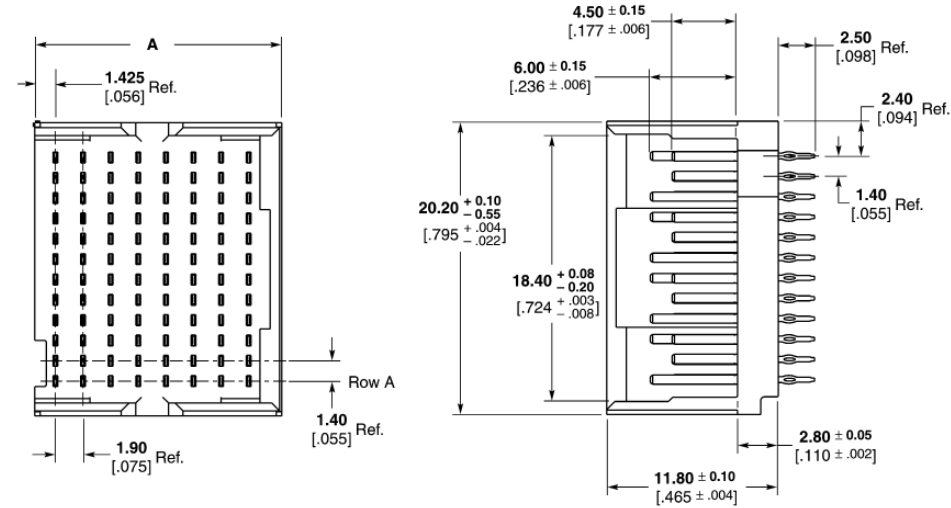

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± 0.002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± 0.001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± 0.0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± 0.0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







4 Pair Vertical Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934306-1 | 17.95 .707 | 13.30 .524 | 1-1804790-1 | 1934222-1 |
| 10 | 1934312-1 | 21.75 .856 | 17.10 .673 | 1804790-5 | 1934224-1 |
| 16 | 1934316-1 | 33.15 1.305 | 28.50 1.122 | 1-1804790-3 | 1934225-1 |

* Reference Application Specification 114-13202.

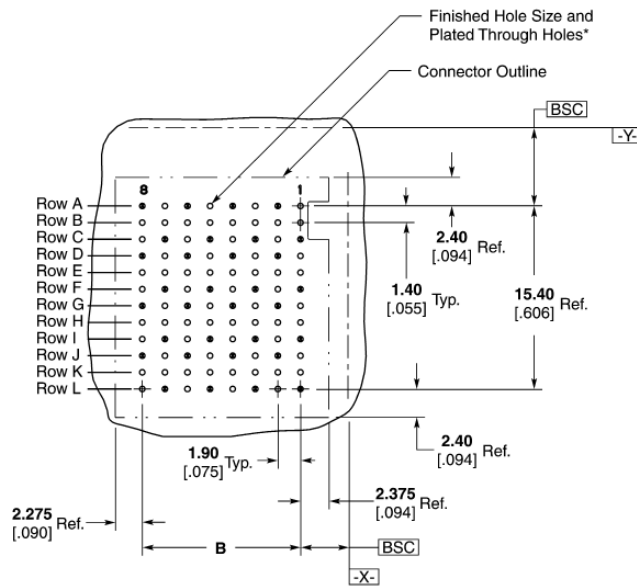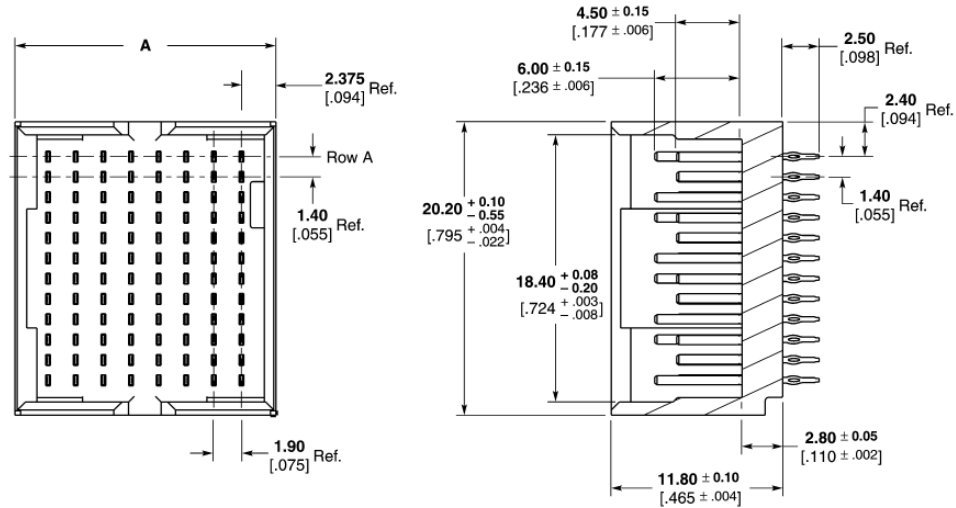

**Recommended PC Board Layout
Backplane
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan High Speed, High Density Backplane Connector







3 Pair Vertical Header Assemblies — Left End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934300-1 | 16.30 .642 | 13.30 .524 | 1-1901457-1 | 1934226-1 |
| 10 | 1934340-1 | 20.10 .791 | 17.10 .673 | 1-1901457-2 | 1934228-1 |
| 16 | 1934344-1 | 31.50 1.240 | 28.50 1.122 | 1-1901457-3 | 1934229-1 |

* Reference Application Specification 114-13202.

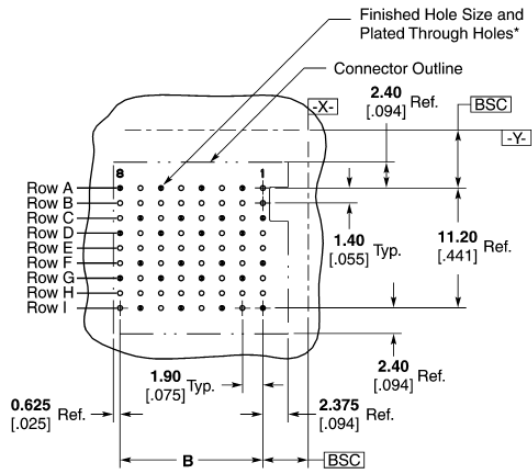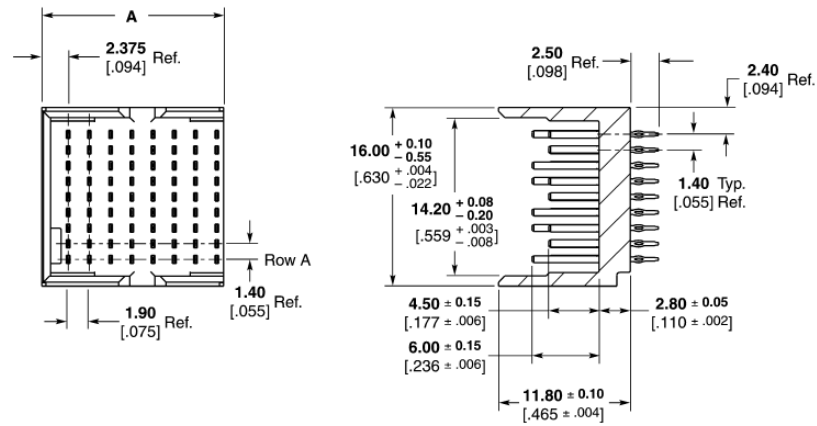

**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± 0.002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± 0.001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± 0.0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± 0.0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan High Speed, High Density Backplane Connector







3 Pair Vertical Header Assemblies — Right End Wall

| Column | Part Number | Dimension | | Application Tooling* | Mates With |
|--------|-------------|----------------|----------------|----------------------|------------|
| | | A | B | | |
| 8 | 1934301-1 | 17.00 .669 | 13.30 .524 | 1-1901457-1 | 1934226-1 |
| 10 | 1934341-1 | 20.08 .791 | 17.10 .673 | 1-1901457-2 | 1934228-1 |
| 16 | 1934345-1 | 32.20 1.268 | 28.50 1.122 | 1-1901457-3 | 1934229-1 |

* Reference Application Specification 114-13202.

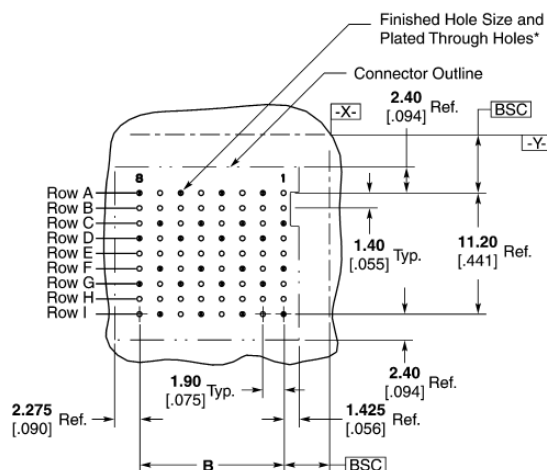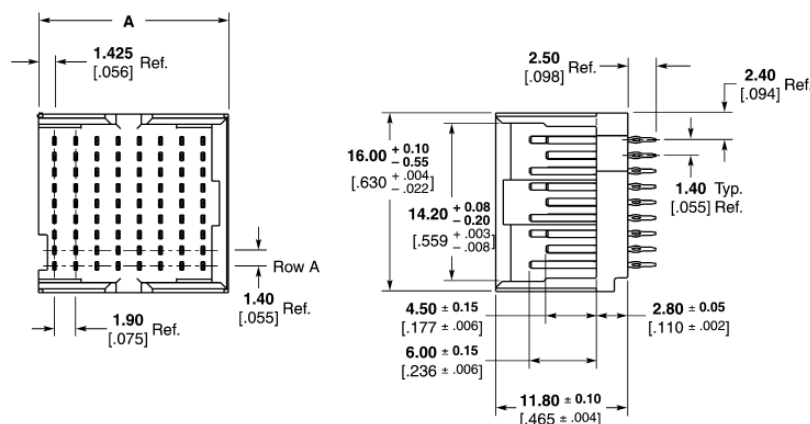

**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± 0.002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± 0.001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± 0.0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± 0.0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







5 Pair Right Angle Pin Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934350-1 | 18.05 .711 | 13.30 .524 | * | 1934218-1 |
| 16 | 1934348-1 | 33.25 1.309 | 28.50 1.122 | * | 1934221-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

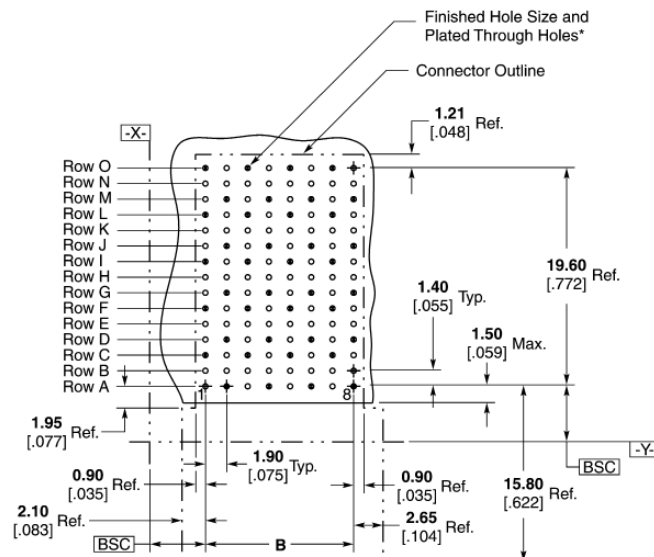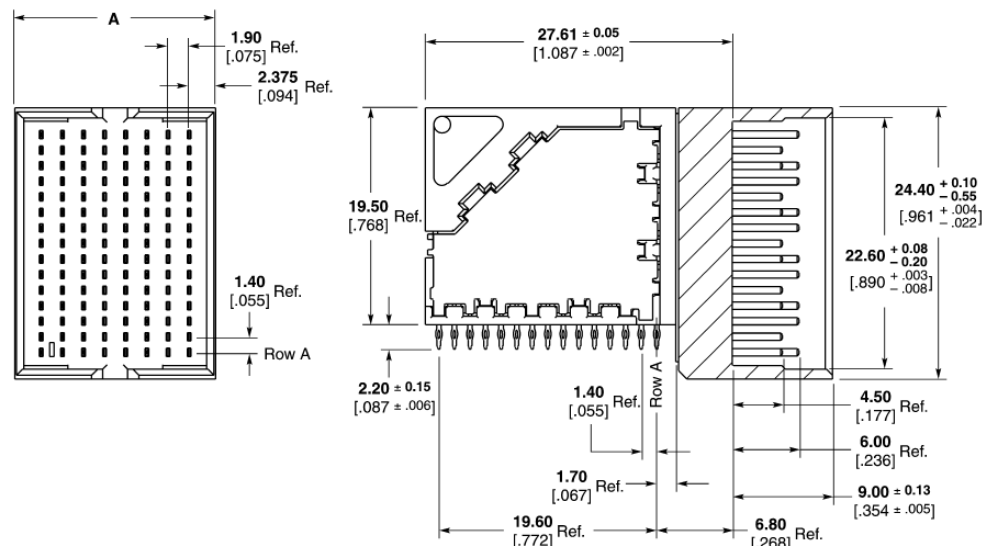

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.





Z-PACK TinMan High Speed, High Density Backplane Connector



4 Pair Right Angle Pin Header Assemblies

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934353-1 | 15.35 .604 | 13.30 .524 | * | 1934222-1 |
| 16 | 1934351-1 | 30.55 1.203 | 28.50 1.122 | * | 1934225-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling.
Reference Application Specification 114-13202.

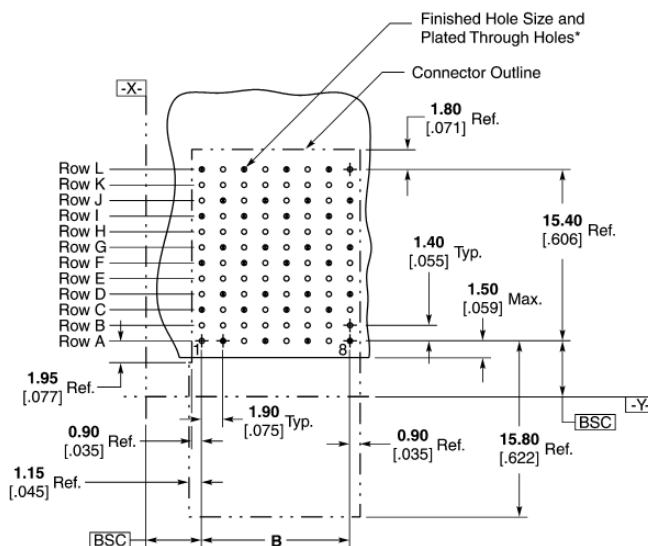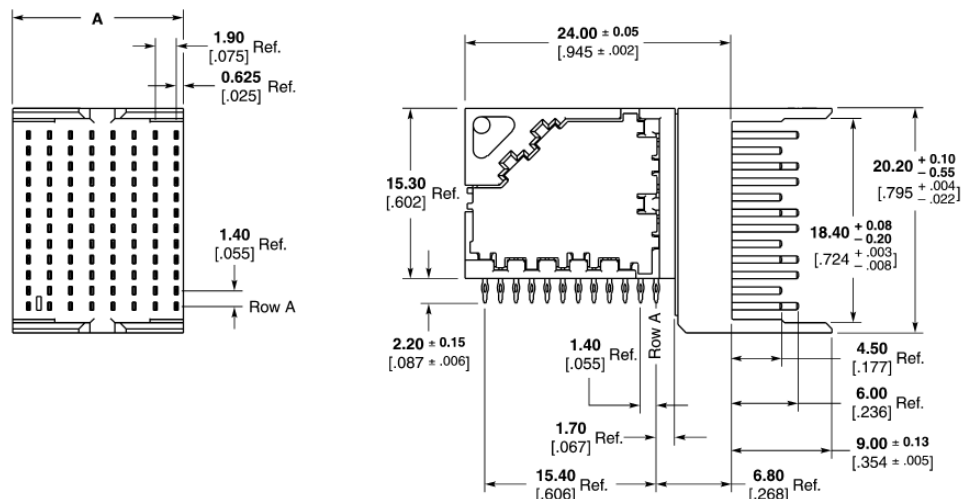


**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



4 Pair Right Angle Pin Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934354-1 | 18.05 .711 | 13.30 .524 | * | 1934222-1 |
| 16 | 1934352-1 | 33.25 1.309 | 28.50 1.122 | * | 1934225-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling.
Reference Application Specification 114-13202.

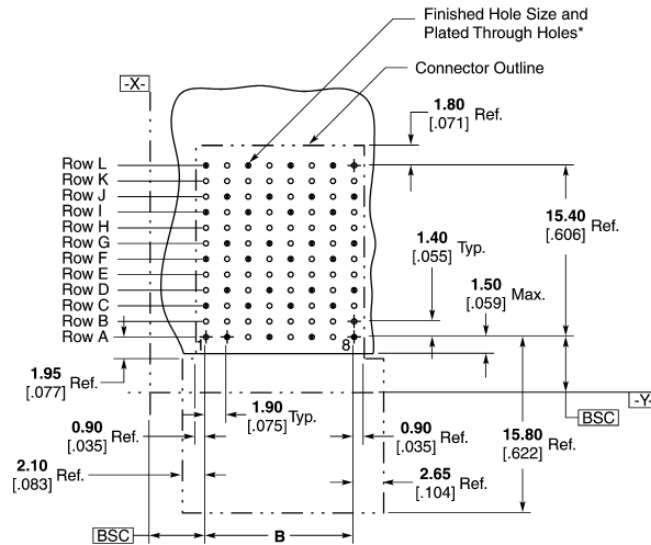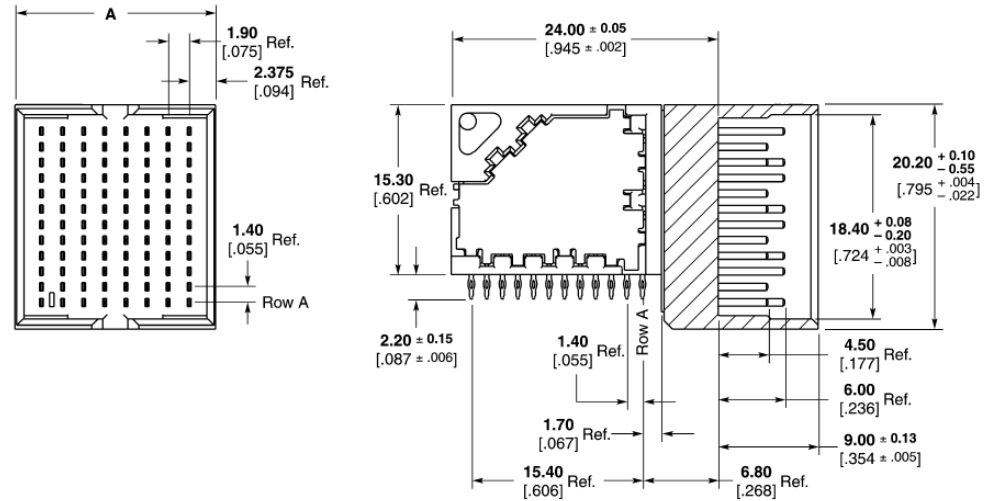

**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



1
Z-PACK TinMan High Speed, High Density Backplane Connector



3 Pair Right Angle Pin Header Assemblies — Double End Walls

| Column | Part Number | Dimension | | Application Tooling | Mates With |
|--------|-------------|----------------|----------------|---------------------|------------|
| | | A | B | | |
| 8 | 1934360-1 | 18.05 .711 | 13.30 .524 | * | 1934226-1 |
| 10 | 1934358-1 | 21.85 .860 | 17.10 .673 | * | 1934228-1 |
| 16 | 1934356-1 | 33.25 1.309 | 28.50 1.122 | * | 1934229-1 |

* Custom tooling not required. Utilizes flat-rock insertion tooling. Reference Application Specification 114-13202.

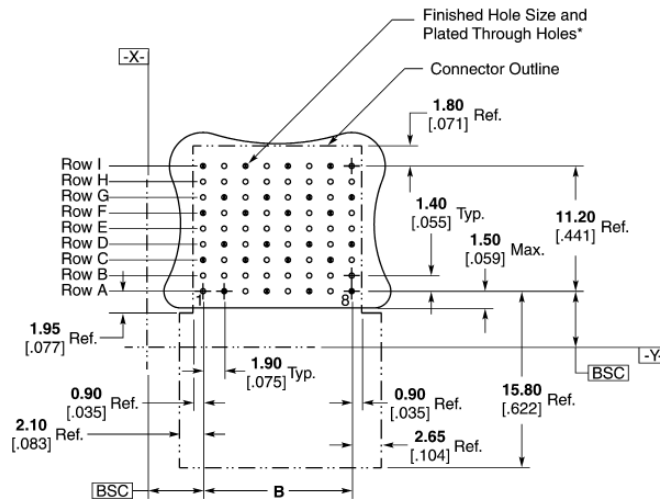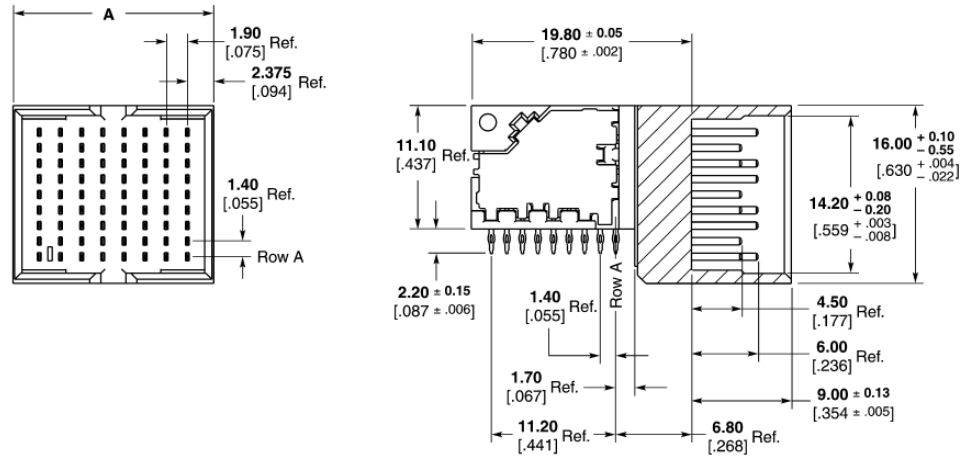

Recommended PC Board Layout Component Side Shown

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan High Speed, High Density Backplane Connector



Z-PACK TinMan Midplane (Orthogonal) Connector Overview

Product Facts

- Scalable to 25 Gbps
- 100 ohm impedance for differential pair configuration
- Very low noise
- Outstanding insertion loss through 2 connectors and vias
- Skewless differential pair in a 2-connector system
- Utilizes the same header and receptacle part on both sides of the midplane
- Compatible with standard Z-PACK TinMan connectors and accessories
- 4 pair x 4 pair and 6 pair x 6 pair modules available
- Reliable, redundant contact design on all contacts
- Reliable press-fit style termination to PCB
- RoHS compliant

Applications

The Z-PACK TinMan midplane (orthogonal) connector is ideally designed for very demanding applications involving data rates in excess of 10 Gbps with many interconnections required. Such applications would include the following Telecom/Datacom equipment:

- Switches
- Servers
- Routers
- Storage



The Z-PACK TinMan midplane (orthogonal) connector is an extension of the Z-PACK TinMan connector product line, which includes perpendicular and coplanar interconnect solutions in 3 pair, 4 pair, and 5 pair versions.


This connector system is commonly referred to as an orthogonal connector system due to the orthogonal (perpendicular) orientation of the two system boards being connected on the front and rear side. It is built on the same technology and design approach as standard Z-PACK TinMan connectors with the same mating interface and lead-frame geometry.

Superior electrical performance is achieved for several reasons. The front board to

rear board connection through the midplane makes the plated through hole (PTH) part of the signal transmission path eliminating the detrimental effects of via stubs. This construction also eliminates the need to route all the high speed signal lines along the backplane minimizing signal loss and significantly improving signal throughput. The wide column spacing establishes a connector footprint with improved impedance and reduced electrical noise. The in-line footprint version also provides ease of trace routing with wide channels and a connector interface compatible with the orthogonal receptacle. This permits the use of the same daughtercard in both midplane and backplane configurations.

The benefits are not limited to just signal integrity performance. The thinner midplane with fewer layers and significantly less complex routing is inherently less expensive. With trace routing typically limited to power distribution, low speed lines and potentially very few high speed links, the board can be fabricated from a cost effective material without the need to utilize techniques such as counter-boring or back-drilling.

All of this permits the implementation of small to large scale full mesh interconnects with significantly reduced complexity at a lower cost and with improved signal integrity.

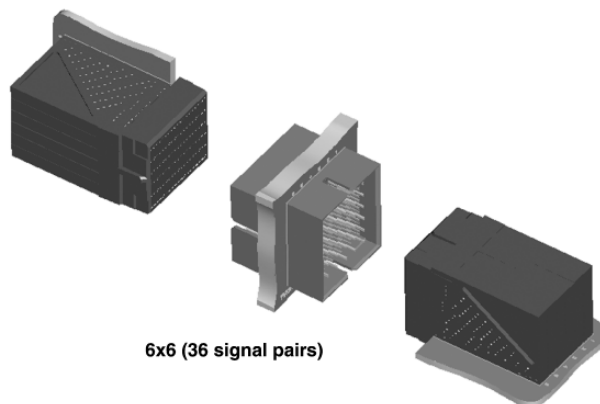

6x6 (36 signal pairs)

For additional information visit:
<http://www.tycoelectronics.com/zpacktinman>



Z-PACK TinMan Midplane (6 x 12 Orthogonal) Connector Overview

Noise Table

- Maximum, multiple source crosstalk

Technical Documents

Product Specification 108-2303

Application Specification 114-13202

Routing Guide Report #27GC002

Material and Finish

Signal Contact — High Strength Copper Alloy

Ground Contact — High Strength Copper Alloy

Housing — Liquid Crystal Polymer, UL 94V-0 Rated

Platings — Telcordia compliant interface, Nickel underplate

Compliant Pin Plating — RoHS Compliant

Ratings

Temperature Range — -65°C to +90°C

Current Rating — 0.5 A/contact @ < 30°C T-Rise

Durability — 200 cycles

Dielectric Withstanding Voltage — 560 VAC

Operating Voltage — 250 VAC max.



Signal Integrity

Characteristic Impedance — Differential @ 100 ohms ±10%


Crosstalk — Multi-pair differential crosstalk: 1.0% @ 50ps

Insertion Loss — -2 dB @ 10 GHz

| Pair | Total Peak |
|------|-------------|
| AB | 1.2% |
| BC | N/A |
| DE | 2.5% |
| EF | 2.4% |
| GH | 2.5% |
| HI | 2.7% |
| JK | 2.8% |
| KL | 2.8% |
| MN | 3.0% |
| NO | 2.9% |
| PQ | 2.3% |
| QR | 1.4% |

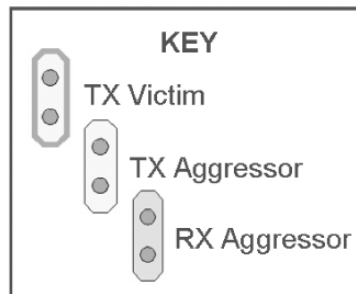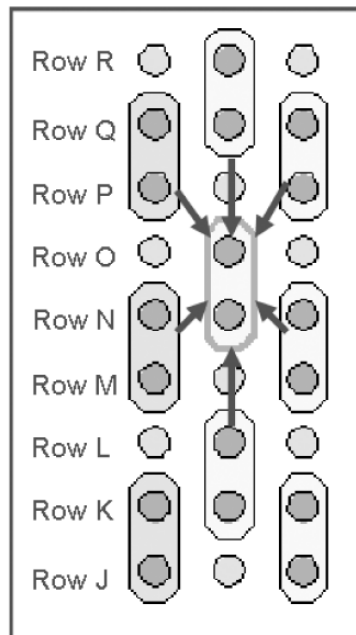

Insertion Loss Plot

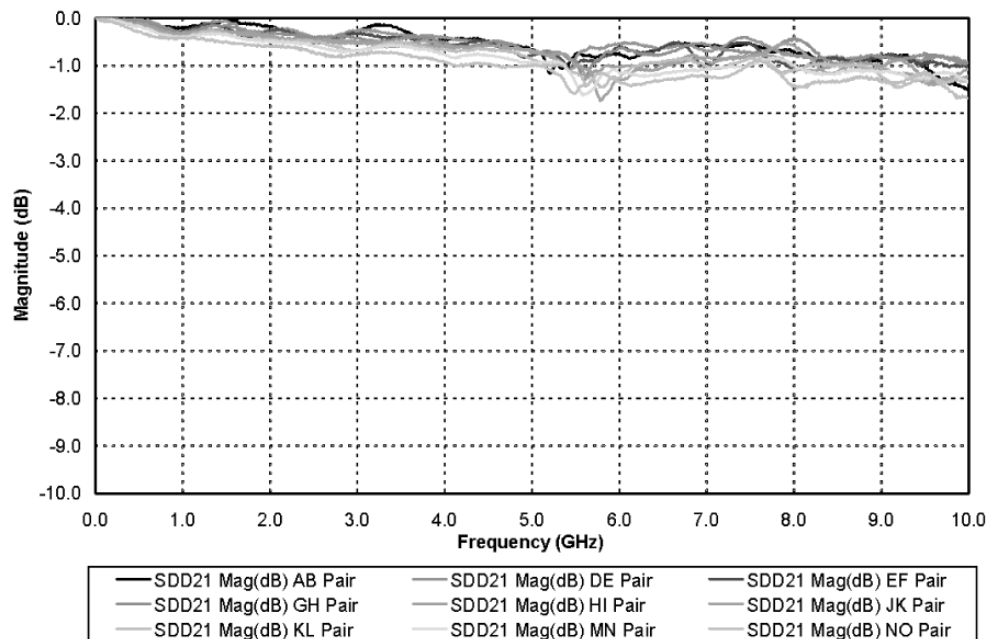

TELCORDIA is a trademark of Telcordia Technologies, Inc.




Z-PACK TinMan High Speed, High Density Backplane Connector



Z-PACK TinMan Midplane (6 x 12 Orthogonal) Connector Overview (Continued)


Representative Eye Pattern

- 10.0 Gbps data rate
- 2⁷-1 PRBS
- Unequalized Signal

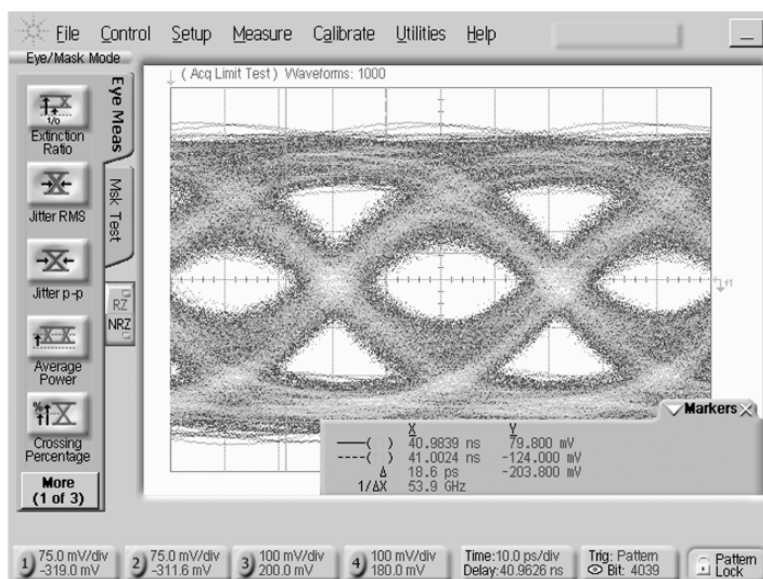

Customer Connector Evaluation Kit

- Connector characterization
- Available for loan — contact your local Tyco Electronics Sales Engineer
- Time and frequency domain testable
- Testable to 18+ GHz (25+ Gb/s)
- Multiple calibration options
- Convenient SMA interface

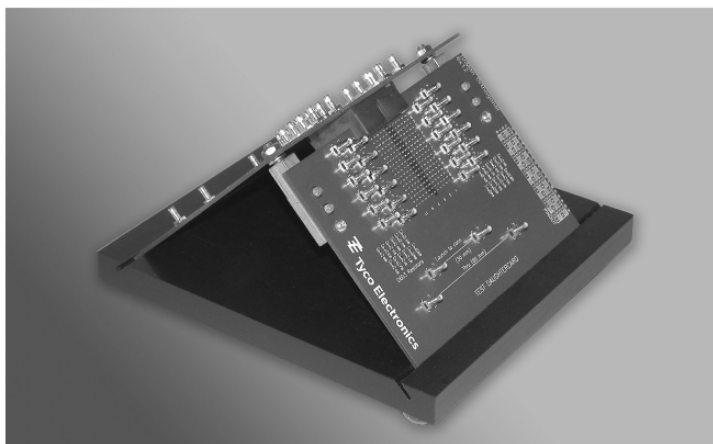

Customer System Evaluation Kit

- System characterization
- Available for loan — contact your local Tyco Electronics Sales Engineer
- Time and frequency domain testable
- Testable to 18+ GHz (25+ Gb/s)
- Multiple calibration options
- Convenient SMA interface





Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies

6 Pair 12 Column Receptacle Assembly



Part Number 1934633-1

Reference Application Specification 114-13202

Mates with Part Number 1934607-1 and Part Number 1934608-1



Z-PACK TinMan High Speed, High Density Backplane Connector

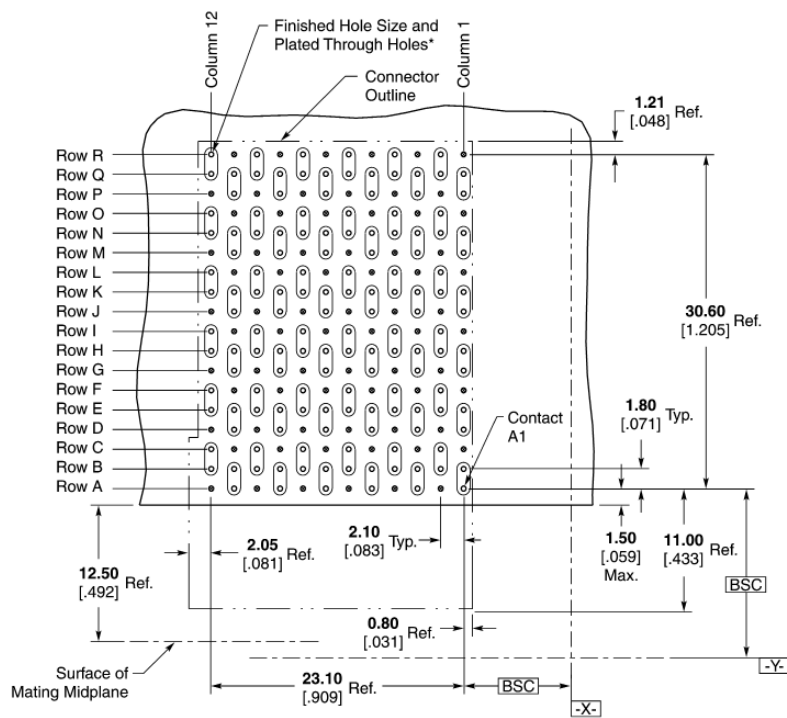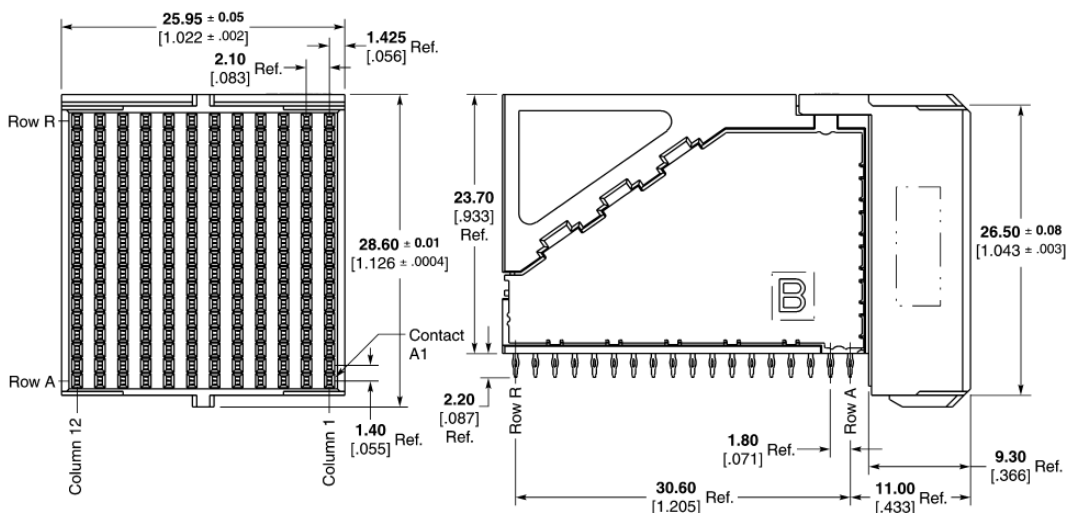

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.




Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

6 Pair 6 Column Receptacle Assembly A


Part Number 1934634-1

Reference Application Specification 114-13202

Mates with Part Number 1934609-1 and Part Number 1934610-1

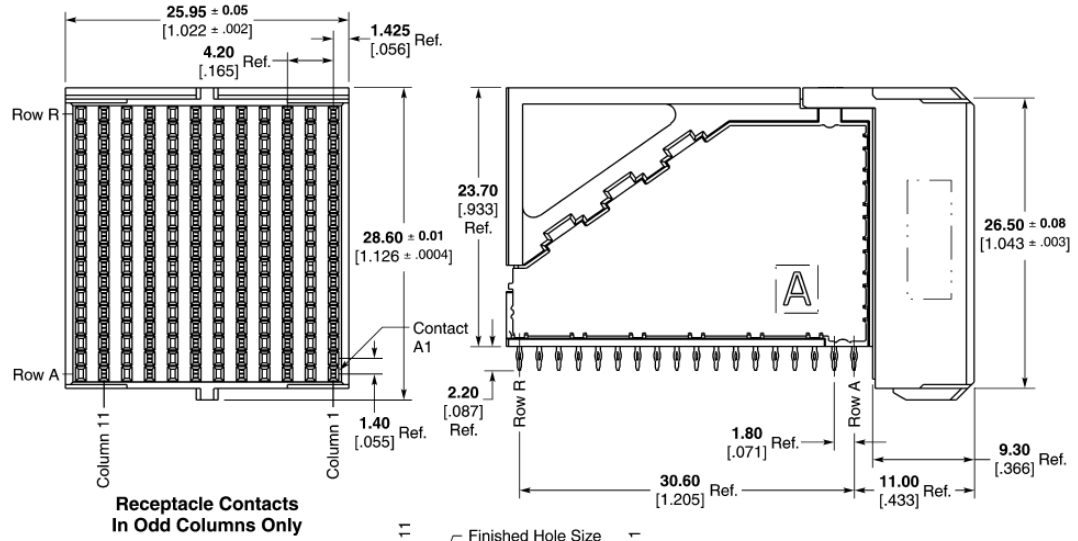

Receptacle Contacts In Odd Columns Only

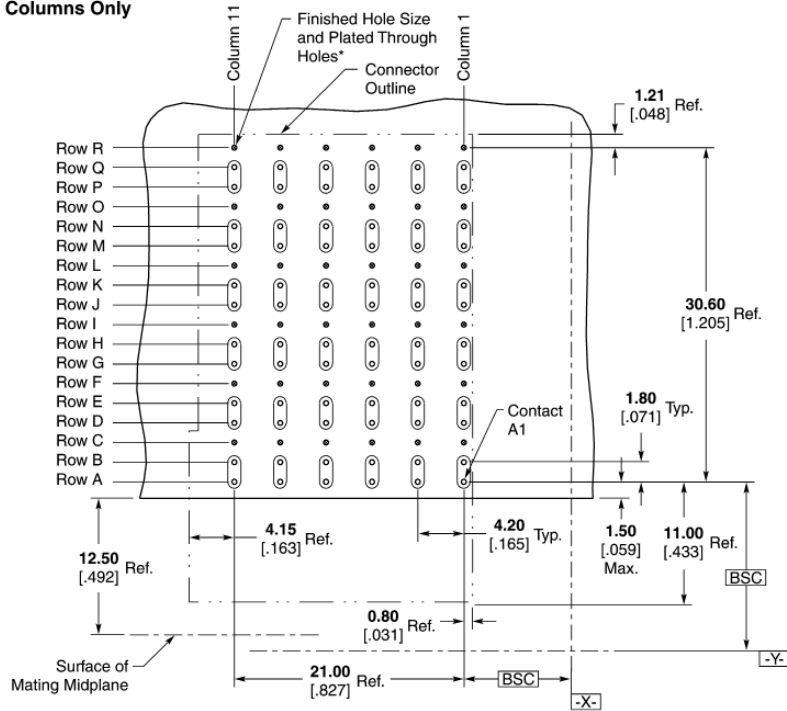


Recommended PC Board Layout Component Side Shown

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.18 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.22 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.





Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

6 Pair 6 Column Receptacle Assembly B



Part Number 1934760-1

Reference Application Specification 114-13202

Mates with Part Number 1934609-1 and Part Number 1934610-1



Z-PACK TinMan High Speed, High Density Backplane Connector

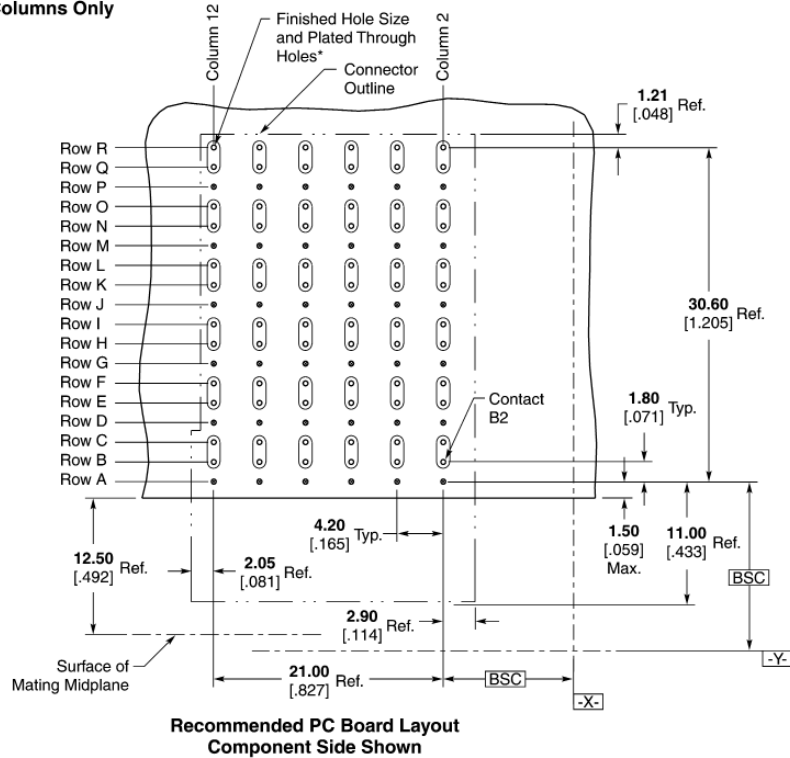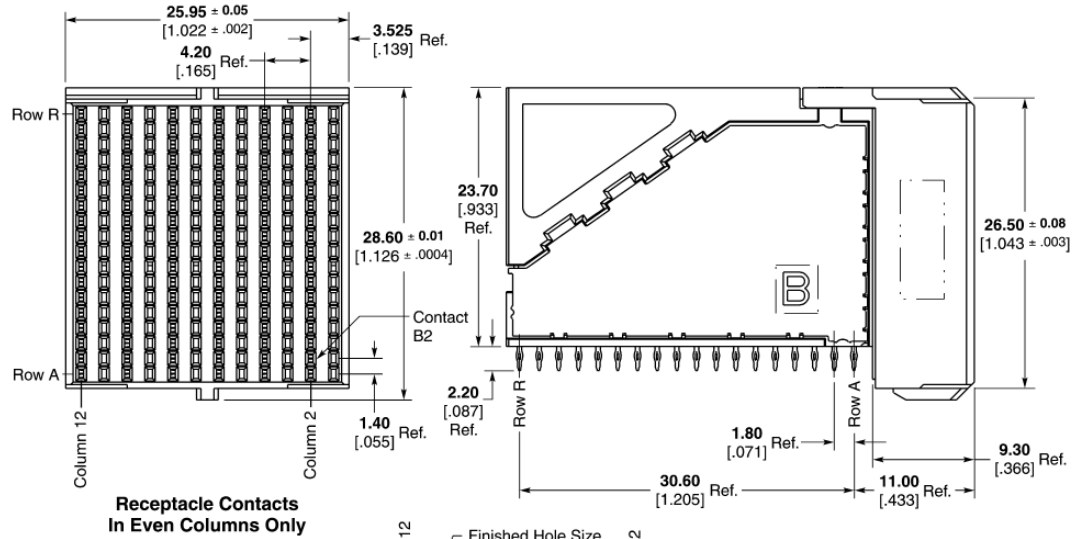

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.



* Finished Hole Diameter = 0.46 ± 0.05 [0.18 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.22 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

**6 Pair 12 Column
Double Wall
Header Assembly**
Part Number 1934608-1
Reference Application
Specification
114-13202
Mates with
Part Number 1934633-1

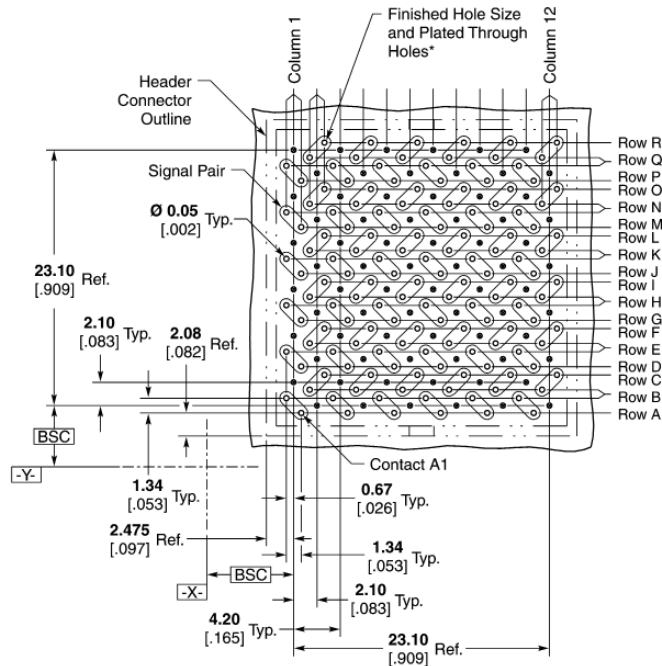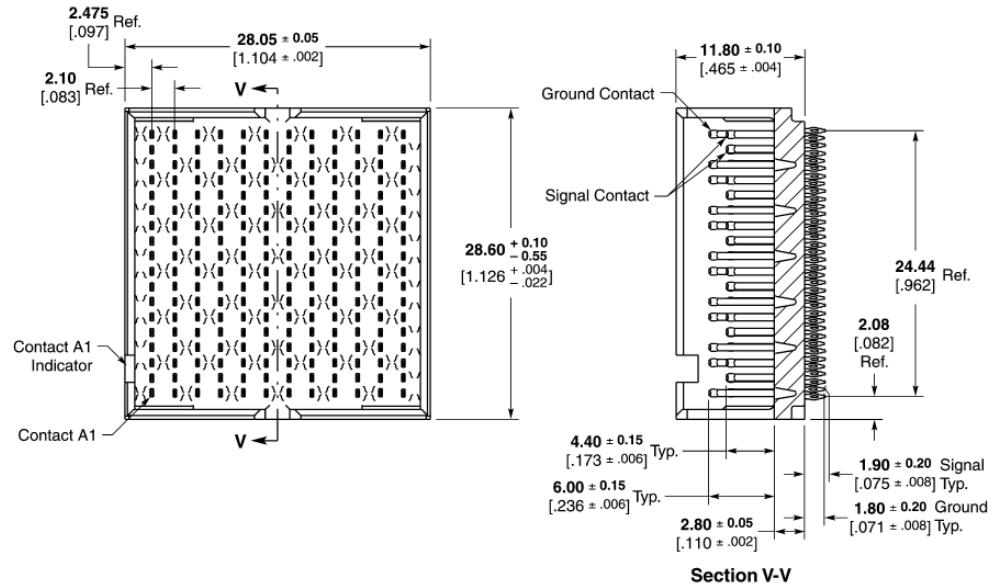


**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202


Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.






Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

**6 Pair 12 Column
Open Ended
Header Assembly**
Part Number 1934607-1
Reference Application
Specification
114-13202
Mates with
Part Number 1934633-1

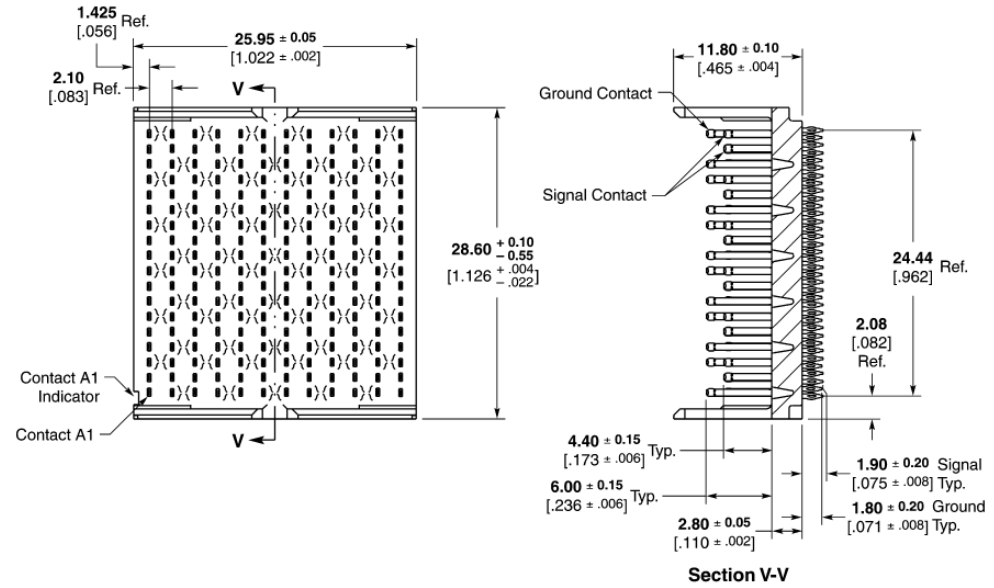

Z-PACK TinMan High Speed, High Density Backplane Connector

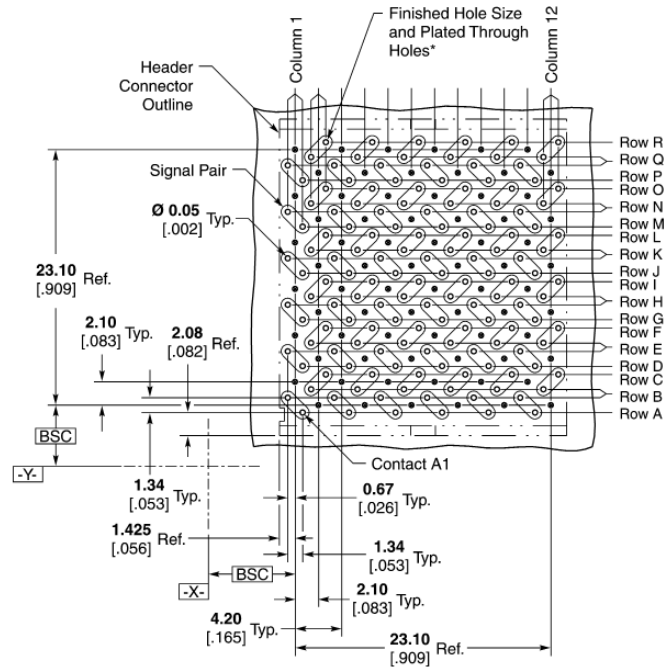

**Recommended PC Board Layout
Component Side Shown**

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [0.018 ± 0.002]
 Drilled Hole Diameter = 0.55 ± 0.02 [0.022 ± 0.001]
 Copper Thickness = 0.038 ± 0.013 [0.0015 ± 0.0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [0.0003 ± 0.0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202



Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

**6 Pair 6 Column
Double Wall
Header Assembly**
Part Number 1934610-1
**Reference Application
Specification
114-13202**


**Mates with
Part Number 1934634-1 and
Part Number 1934760-1**

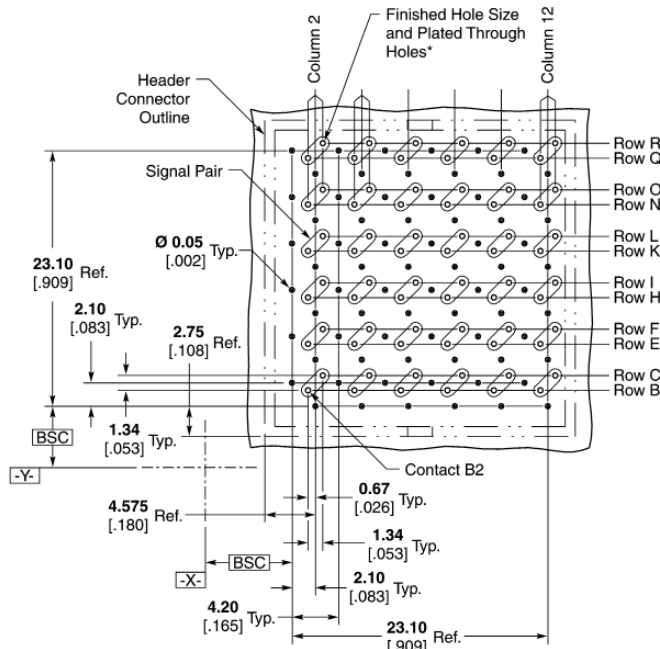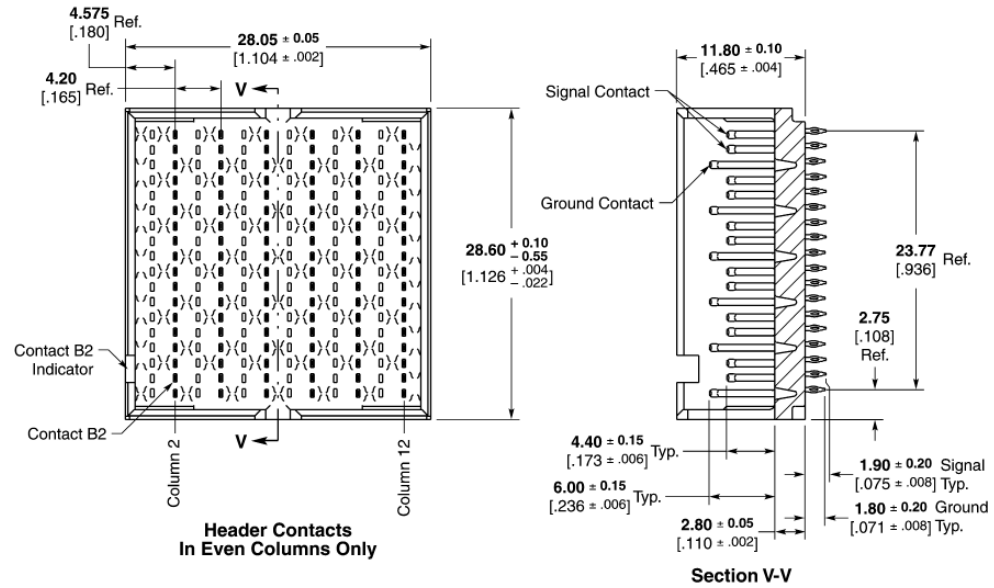

Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.







Z-PACK TinMan Orthogonal 6 Pair Midplane Assemblies (Continued)

**6 Pair 6 Column
Open Ended
Header Assembly**
Part Number 1934609-1
Reference Application
Specification
114-13202
Mates with
Part Number 1934634-1 and
Part Number 1934760-1



Z-PACK TinMan High Speed, High Density Backplane Connector

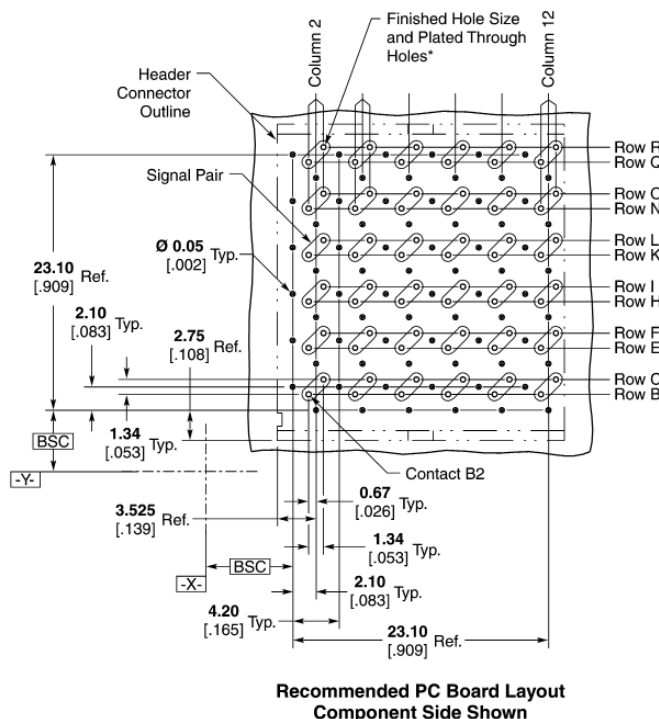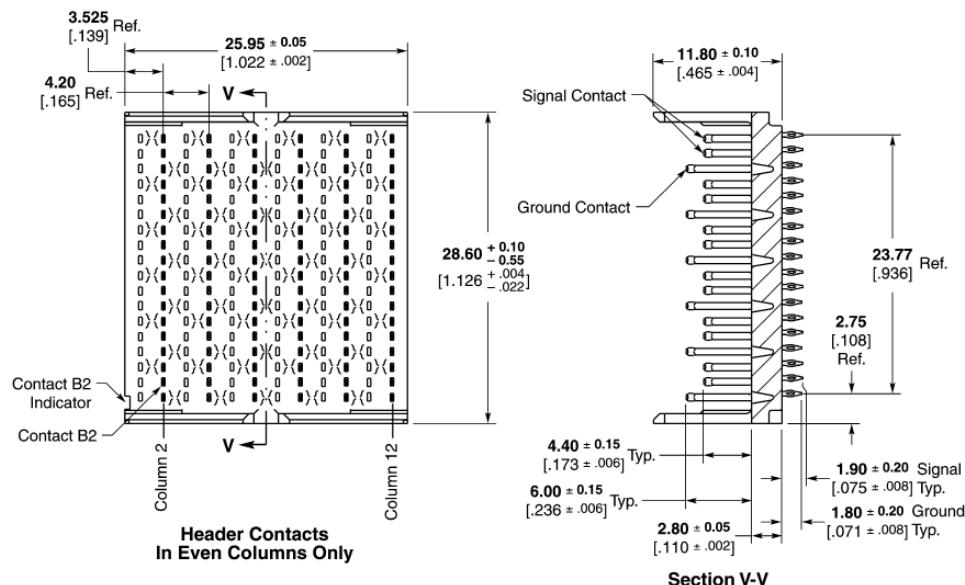



Note: For additional information on pcb routing guidelines, reference the Z-PACK TinMan Connector Routing Guide Report #27GC001-1.

* Finished Hole Diameter = 0.46 ± 0.05 [.018 ± .002]
 Drilled Hole Diameter = 0.55 ± 0.02 [.022 ± .001]
 Copper Thickness = 0.038 ± 0.013 [.0015 ± .0005]
 Tin-Lead Thickness = 0.008 ± 0.004 [.0003 ± .0002]
 Finishes other than Tin-Lead, See Appl. Spec. 114-13202

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.



Z-PACK TinMan Product Mating Sequence Chart



| Product Family | Dim. C | Dim. A Fully Mated | Contact | Dim. B. | | Fully Mated Wipe Length |
|---|--------------|--------------------|---------------------------|---------------|-----------------------|-------------------------|
| | | | | Reliable Mate | First Mate Last Break | |
| Z-PACK HM-Zd Product | 1.50 .059 | 12.50 .492 | Ground Shield | 16.78 [.661] | 17.55 [.691] | 4.28 [.169] |
| | | | Signal Level 2 | 15.41 [.607] | 15.85 [.624] | 2.91 [.115] |
| | | | Signal Level 1 | 13.91 [.548] | 14.35 [.565] | 1.41 [.056] |
| Z-PACK HM-Zd Guide Hardware | 3.00 .118 | 12.50 .492 | 24.0 mm Pin | 27.50 [1.083] | 33.40 [1.315] | N/A |
| | | | 22.2 mm Pin | 25.70 [1.012] | 31.60 [1.244] | N/A |
| | | | Key Blocking Point | N/A | 22.03 [.867] | N/A |
| Z-PACK TinMan Product | 1.50 .059 | 12.50 .492 | Ground Pins | 16.44 [.647] | 17.13 [.674] | 3.94 [.155] |
| | | | Signal Level 2 | 14.94 [.588] | 15.63 [.615] | 2.44 [.096] |
| | | | Signal Level 1 | N/A | N/A | N/A |
| Z-PACK 2mm HM Product | 1.50 .059 | 12.50 .492 | Signal Level 3 | 18.27 [.719] | 18.84 [.742] | 5.77 [.227] |
| | | | Signal Level 2 | 16.77 [.660] | 17.34 [.683] | 4.27 [.168] |
| | | | Signal Level 1 | 15.27 [.601] | 15.84 [.624] | 2.77 [.109] |
| MULTIGIG RT T1 Product | 2.50 .098 | 12.50 .492 | Ground | 18.00 [.709] | — | 5.50 [.217] |
| | | | Signal Level 3 | 18.00 [.709] | — | 5.50 [.217] |
| | | | Signal Level 2 | 16.50 [.650] | — | 4.00 [.157] |
| | | | Signal Level 1 | 15.00 [.591] | — | 2.50 [.098] |
| MULTIGIG RT T2 Product | 2.25 .089 | 12.50 .492 | Ground | 18.00 [.709] | — | 5.50 [.217] |
| | | | Signal Level 3 | 18.00 [.709] | — | 5.50 [.217] |
| | | | Signal Level 2 | 16.50 [.650] | — | 4.00 [.157] |
| MULTIGIG RT Power Module | 5.50 .217 | 12.50 .492 | Signal Level 1 | 15.00 [.591] | — | 2.50 [.098] |
| | | | Power Level 3 | 23.75 [.935] | — | 11.25 [.443] |
| | | | Power Level 2 | 22.25 [.876] | — | 9.75 [.384] |
| MULTIGIG RT Guide Hardware | N/A | 12.50 .492 | Power Level 1 | 20.75 [.817] | — | 8.25 [.325] |
| | | | Guide Pin Key | 33.25 [1.309] | N/A | 20.75 [.817] |
| | | | Guide ESD Contact | 30.75 [1.211] | — | 18.25 [.719] |
| Z-PACK HS3 Product | 1.50 .059 | 12.50 .492 | Ground | 17.08 [.672] | 17.60 [.693] | 4.78 [.188] |
| | | | Signal Level 2 | 16.05 [.632] | 16.47 [.648] | 3.75 [.148] |
| | | | Signal Level 1 | 14.55 [.573] | 14.97 [.589] | 2.25 [.089] |
| UPM | 3.50 .138 | 12.50 .492 | Power Level 3 | 20.25 [.797] | 20.95 [.825] | 8.10 [.319] |
| | | | Power Level 2 | 18.65 [.734] | 19.35 [.762] | 6.50 [.256] |
| | | | Power Level 1 | 17.03 [.670] | 17.73 [.698] | 4.88 [.192] |
| UPM Guide Hardware | 5.75 .226 | 12.50 .492 | Guide Pin Key | 31.39 [1.236] | 36.16 [1.424] | N/A |
| | | | Keyed Guide Pin | 31.39 [1.236] | 36.16 [1.424] | N/A |
| | | | Keyed Guide Pin | 35.23 [1.387] | 40.00 [1.575] | N/A |
| MULTI-BEAM XL Right Angle Header to Vertical Receptacle | 5.08 .200 | 14.73 .580 | PreMate Power — Level 1 | — | 16.84 [.663] | 5.61 [.221] Min. |
| | | | PostMate Power — Level 2 | — | 17.81 [.701] | 4.34 [.171] Min. |
| | | | PreMate Signal — Level 2 | — | 18.26 [.719] | 3.81 [.150] Min. |
| | | | PostMate Signal — Level 3 | — | 19.53 [.769] | 2.54 [.100] Min. |
| MULTI-BEAM XL Right Angle Receptacle to Vertical Header | 3.81 .150 | 13.21 .520 | PreMate Power — Level 1 | — | 15.32 [.603] | 5.61 [.221] Min. |
| | | | PostMate Power — Level 2 | — | 16.28 [.641] | 4.34 [.171] Min. |
| | | | PreMate Signal — Level 2 | — | 16.74 [.659] | 3.81 [.150] Min. |
| | | | PostMate Signal — Level 3 | — | 18.01 [.709] | 2.54 [.100] Min. |



Table of Contents

Z-PACK Slim UHD Connector 47-54

 Product Line Overview 48

 Connector Concept 49

 Flexibility 49

 Upgradeability 50

 Connector Footprint 50

 Typical Electrical Properties 51

 Female and Male Connectors 52

 Right-Angle Male (RAM) Connector 53

 Power Connector 53

 Guide Pins and Guide Module 54

2

Z-PACK Slim UHD Connector






Z-PACK Slim UHD Connectors

Product Facts

- Density of 55 pins/cm²
- Fits +13 mm slot pitches
- 20+ Gbps scalable signal speed
- Complete end-to-end stackable
- Press-fit termination technology
- Different pin assignments possible
- Post/Premating possible
- Integrated polarization & guiding

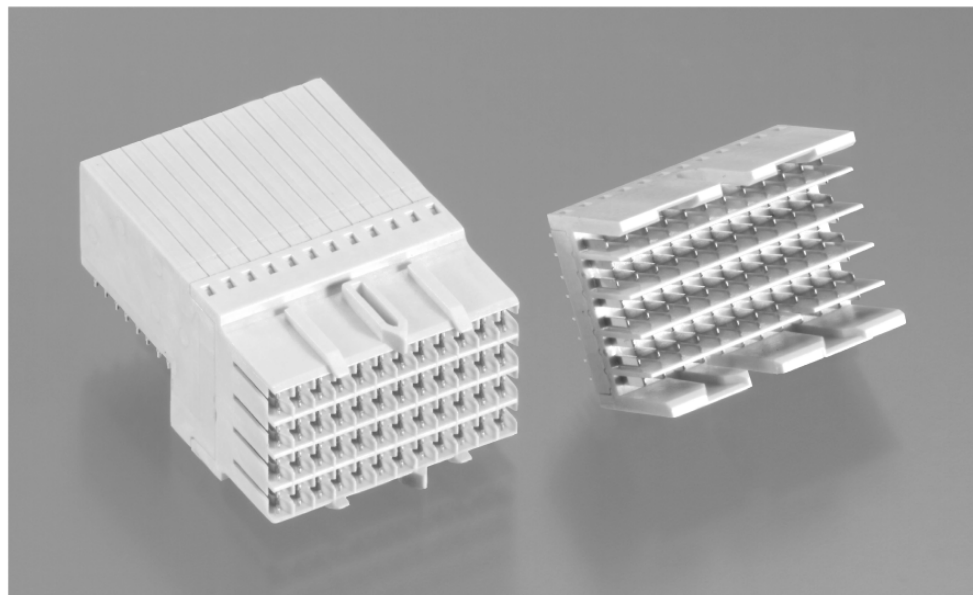


Z-PACK Slim (low profile) UHD (Ultra High Density) is a flexible and upgradeable connector system designed to fit 15 mm (0.6 inch) slot pitch applications.

The Z-PACK Slim UHD connector has an extremely high contact density combined with excellent high speed signal performance.

For more Information:
<http://www.zpackuhd.com>

Applications

- Telecom Equipment
- Switches
- Routers
- Servers, etc.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed/Modular Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[2332816-1](#) [89006-1137LF](#) [650827-1](#) [65762-001LF](#) [73474-201LF](#) [74040-1346](#) [74075-0267](#) [1410191-1](#) [1410337-1](#) [1410368-3](#) [1410964-2](#)
[1410367-3](#) [1410971-4](#) [1467833-1](#) [2000877-1](#) [2000878-1](#) [2041314-1](#) [2065387-1](#) [2187307-1](#) [2187462-1](#) [2226278-6](#) [KA81-07](#) [91290-101LF](#)
[163P](#) [1934290-1](#) [2000875-1](#) [2065917-1](#) [2102736-2](#) [FSR-40](#) [2169868-2](#) [2226279-2](#) [22354-8](#) [437-5040-000](#) [5-1393565-0](#) [532449-3](#) [532803-](#)
[2](#) [34745-0001](#) [0736440217](#) [1-1393708-5](#) [72388-0021LF](#) [73774-1000](#) [532939-1](#) [5-531355-3](#) [5532901-3](#) [85838-180LF](#)
[HM1S43TRR460H6PLF](#) [0760205010](#) [1-966831-4](#) [3-1469268-7](#) [77427-121LF](#)