


# SPECIFICATION CONTROL DRAWING

**55/2124**

TITLE TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, OUTER SPACE, 600 VOLT	Date 4-20-11	Revision C
--	-----------------	---------------

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

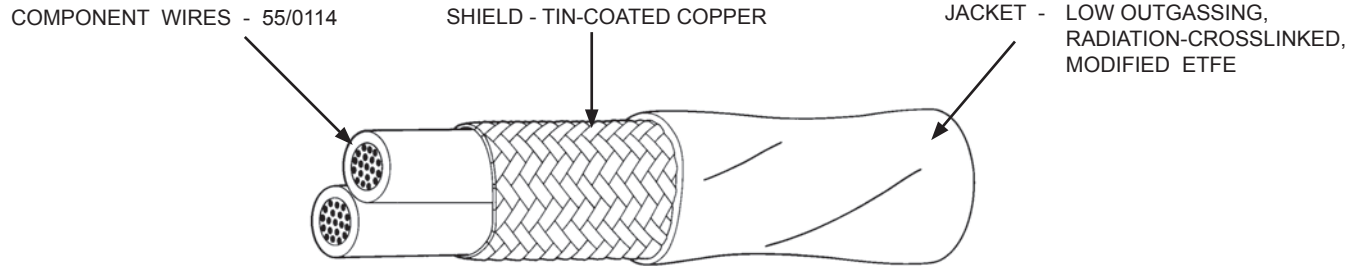

CABLE CONSTRUCTION DETAILS							
PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (± .0004 inch)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/2124-30-*	30	.0015	.006	.008	.071	.076	3.8
55/2124-28-*	28	.0015	.006	.008	.077	.082	4.6
55/2124-26-*	26	.0015	.006	.008	.087	.092	6.0
55/2124-24-*	24	.0015	.006	.008	.097	.102	7.7
55/2124-22-*	22	.0015	.006	.008	.109	.114	10.0
55/2124-20-*	20	.0015	.006	.008	.123	.129	13.7

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms) at sea level  
 CROSSLINKED VERIFICATION: 300 ± 3°C for 1 hour  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 JACKET COLOR: White preferred  
 JACKET ELONGATION: 50% (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms)  
 Impulse Dielectric Test, 6.0 kV (peak)

RADIATION RESISTANCE: 500 megarads  
 SHIELD COVERAGE: 85% (minimum)  
 VACUUM STABILITY:  
 Total Mass Loss (TML), 1.00% (maximum)  
 Volatile Condensable Material (VCM), 0.10% (maximum)  
 VOLTAGE WITHSTAND (Post Environmental):  
 1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

NOTE: Nominal values are for information only.  
 Nominal values are not requirements.

1/ Example: AWG 20, black and brown component wires; white jacket:  
 55/2124-20-0/1-9

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.		
1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.		
Page 1 of 1	TE Connectivity, TE connectivity (logo), TE (logo), and Raychem are trademarks. DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL. THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.	<p style="font-size: x-small;">Raychem Wire &amp; Cable                  501 Oakside Avenue                  Redwood City, CA 94063-3800                  Phone: 1-800-227-8816                  Fax: 1-650-361-6297</p>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [89842-002-1000](#) [6000FE-877-1000](#) [6120UL-002-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#) [6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#)  
[720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#) [82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#)  
[83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#)  
[8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [9318-060-1000](#) [939870-000](#) [9423 060U500](#)