
3M[™] Pin Strip Header

2 mm x 2 mm Dual Insulator, Straight, Surface Mount

951 Series

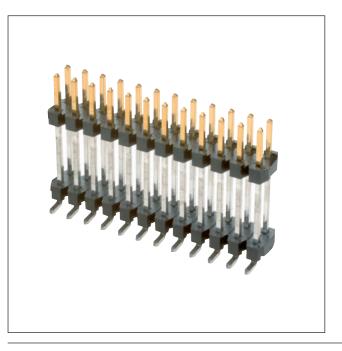

- High temperature dielectric
- "No lead" reflow solder compatible
- Maximizes use of PC board space
- End stackable feature
- Mates with boardmount products
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the RoHS compliance section of www.3Mconnectors.com for compliance information (RIA E1 & C1 apply)

Date Modified: November 19, 2014

TS-2159-D Sheet 1 of 2

Physical

Insulation

Material: High Temperature Thermoplastic

Flammability: UL 94V-0 Color: Black

Contact

Material: Copper Alloy

Plating

Underplating: $1.25-2.5 \mu m [100 \mu'']$ Nickel

Wiping Area: Flash Gold

Solder Tail Area: 1–3 μm [40–118 μ"] Matte Tin

Electrical

Current Rating: 1 A

Insulation Resistance: $> 5 \times 10^8 \text{ Ohm at } 100 \text{ V}_{DC}$

Environmental


Temperature Range: -40 °C to +105 °C

Processing Temperature: max. 260°C (Profile per J-STD-020C)

Moisture Sensitivity Level: 1 (per J-STD-020C)

UL File No.: E68080

951 Series

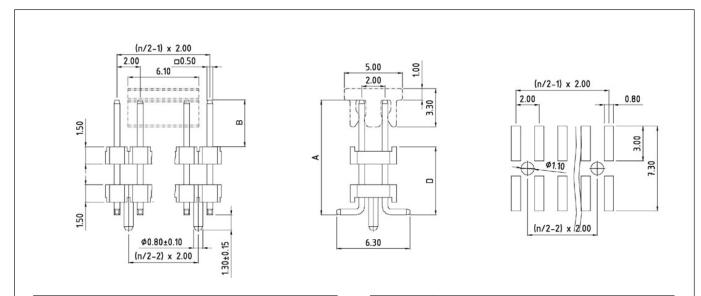


Contact Dimensions						
Coding No.	A	Mating Length	D			
13	9.9	4.0	5.9			
14	10.7	4.0	6.7			
16	11.9	4.0	7.9			
17	12.4	4.0	8.4			
20	15.4	4.0	11.4			
23	17.4	4.0	13.4			
Others on Request						

Contact Dimensions						
Coding No.	A	Mating Length	D			
13	11.8	5.9	5.9			
14	12.6	5.9	6.7			
16	13.8	5.9	7.9			
17	14.3	5.9	8.4			
20	17.3	5.9	11.4			
23	19.3	5.9	13.4			
Others on Requ	est					

n = No. of Contacts

Tolerance Unless Noted [mm]						
Nominal Size	0.5-3	3–6	6–30	30–120		
Linear Dim	+/- 0.1	+/- 0.1	+/- 0.2	+/- 0.3		
Radii	+/- 0.2	+/- 0.5	+/- 1	+/- 1		

Ordering Information

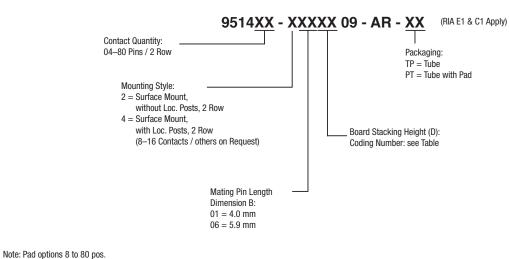

TS-2159-D Sheet 2 of 2

Important Notice All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M

will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

3M is a trademark of 3M Company.

Please recycle. Printed in USA.

© 3M 2014. All rights reserved.

RIA-2217A-E

Electronic Materials Solutions Division

6801 River Place Blvd. Austin, TX 78726-9000

www.3Mconnectors.com

1-800-225-5373

U.S.A.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

892-18-020-10-001101 58102-G61-06LF 582553-1 0009485154 009176003701906 0050291907 LY20-4P-DT1-P1E-BR 02.125.8002.8

609-3404 61062-3 622-0430 622-3653LF 63453-116 636-1030 636-1427 636-3427 636-4007 641938-9 641991-4 644827-2 65817-010LF

65817-015LF 65863-015LF 66207-023LF 67095-007LF 67601157 68648-049 70.362.1628.0 70-4210 70-4226B 70-4853B 707-5020 707
5028 71.350.2428.0 71918-208LF 71961-016LF 733-134 733-162 754199-000 760-3052 787-8014-00 79531-3000 FCN-360C032-B FCN
367T-T012/H FCN-723D010/2 80.063.4001.1 800-90-001-10-001000 800-90-010-10-002000 801-43-002-10-013000 801-43-006-10-002000