


- A. Dual banana jacks for grounding two wrist straps (0.162" 0.164" ± 0.002" ID).
- B. Black anodized aluminum angle bracket frame, mounts underneath worksurface.
- C. Dual 0.155" (4mm) studs for "parking" wrist strap ground cords when not in use.
- D. 10' ground wire. Insulator: PVC, yellow striped green, 0.100" OD. Conductor: 105 strands each. Approximately 22 gauge with a #10 (0.200" ID) ring terminal.
- E. Slotted bracket allows easy installation for screws with a maximum diameter of 0.175" (4.4mm).
- F. Grounding symbol markings on each banana jack.
- G. Extra #10 (0.200" ID) ring terminal for custom installation.
- H. Vinyl boot insulates electrical circuits.

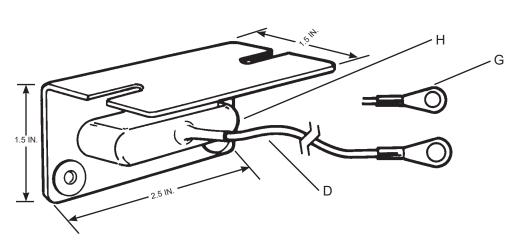

"Grounding / Equipotential Bonding Systems shall be used to ensure that ESDS items, personnel and any other conductors (e.g., mobile equipment) are at the same electrical potential."... "All personnel shall be bonded or electrically connected to the grounding / equipotential bonding system when handling ESDS [ESD sensitive] items." (ANSI/ESDS20.20 section 8.)

"When personnel are seated at ESD protective workstations, they shall be connected to the grounding / equipotential bonding system via a wrist strap system." (ANSI/ESDS20.20-2007 section 8.2)



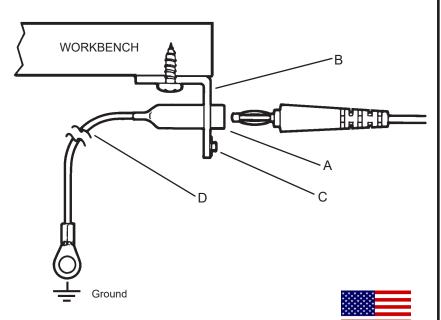

Specifications and procedures subject to change without notice.

DRAWING NUMBER WSGR2

DATE: August 2019

Made in the

United States of America

GROUND CORD, DUAL WRIST STRAP, BENCH MOUNT



926 JR Industrial Drive, Sanford, NC 27332

WEB SITE: StaticControl.com

PHONE: EAST: (919) 718-0000 | WEST: (909) 627-9634

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antistatic Control Products category:

Click to view products by 3M manufacturer:

Other Similar products are found below:

13020 13490 13870 13879 13881 13883 13882 14404 2202SP 3039 37061 42470 09060 09857 42516 37059 04563 17252 19691 19695 09037 09826 09813 66070 100816 68101 68103 98132 73741 13868 13485 13457 13245 13468 13420 13332 13205 13135 91070 8031 8523 66085 40931 37081 13080 13215 13806 73749 010-0225 17260