


F2D SERIES

Foil Winding Type : Standard

•Thin coating makes it suitable for automatic insertion.

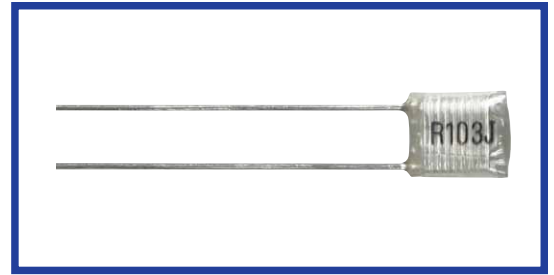


SPECIFICATIONS

Category Temperature Range	-40~+105°C ※
Rated Voltage (U _R)	50Vdc, 100Vdc, 200Vdc
Capacitance Tolerance	±5%(J), ±10%(K)
tanδ	0.01max at 1kHz
Voltage Proof	U _R ×200% 60s
Insulation Resistance	30000MΩmin
Reference Standard	JIS C 5101-11, JIS C 5101-1


DIMENSIONS

(mm)

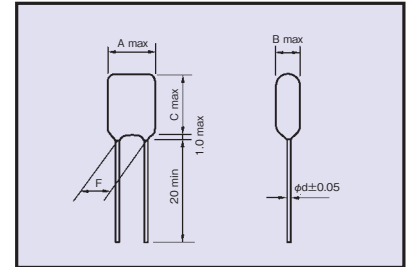

※Derate the voltage as shown in the "CAUTION FOR PROPER USE OF FILM CAPACITORS" when using the capacitor beyond 85°C.

PART NUMBER



STANDARD SIZE

□:Capacitance Tolerance **:Taping

Rated Voltage	Cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)							Part No.
		A	B	C	F	LS [※] ±0.5	d	Long Lead type		Taping Ammo Pack Type - Style					
								Bag	Carton	TV	TF	-	-	TS	
50 Vdc	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D471□**
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D561□**
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D681□**
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D821□**
	0.001	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D102□**
	0.0012	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D122□**
	0.0015	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D152□**
	0.0018	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D182□**
	0.0022	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D222□**
	0.0027	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D272□**
	0.0033	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D332□**
	0.0039	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D392□**
	0.0047	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D472□**
	0.0056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D562□**
	0.0068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D682□**
	0.0082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	-	-	-	3,000	50F2D822□**
	0.01	6.5	3.5	7.5	3.5±0.5	5.0	0.5	200	8,000	2,500	-	-	-	2,500	50F2D103□**
	0.012	6.5	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	-	-	-	2,500	50F2D123□**
	0.015	6.5	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	-	-	-	2,500	50F2D153□**
	0.018	6.5	3.0	8.5	3.5±0.5	5.0	0.5	200	8,000	2,500	-	-	-	2,500	50F2D183□**
	0.022	7.0	4.0	9.5	3.5±0.5	5.0	0.5	200	8,000	2,500	-	-	-	2,500	50F2D223□**
	0.027	7.0	4.0	9.5	3.5±0.5	5.0	0.5	200	5,000	2,500	-	-	-	2,500	50F2D273□**
	0.033	7.0	4.0	9.5	3.5±0.5	5.0	0.5	200	5,000	2,000	-	-	-	2,500	50F2D333□**
	0.039	7.5	4.0	9.5	5.0±1.0	5.0	0.5	200	5,000	2,000	-	-	-	2,000	50F2D393□**
	0.047	8.0	5.0	10.0	5.0±1.0	5.0	0.5	200	4,000	2,000	-	-	-	2,000	50F2D473□**
	0.056	8.0	4.5	10.5	5.0±1.0	5.0	0.5	200	4,000	2,000	-	-	-	2,000	50F2D563□**
	0.068	8.0	5.0	10.5	5.0±1.0	5.0	0.5	200	4,000	1,500	-	-	-	1,500	50F2D683□**
	0.082	8.5	5.0	10.5	5.0±1.0	5.0	0.5	200	3,000	1,500	-	-	-	1,500	50F2D823□**
	0.1	9.0	6.0	11.5	5.0±1.0	5.0	0.5	200	3,000	1,500	-	-	-	1,500	50F2D104□**
	0.12	9.0	5.5	12.0	5.0±1.0	5.0	0.5	200	3,000	1,500	-	-	-	1,500	50F2D124□**
0.15	9.5	6.5	12.0	5.0±1.0	5.0	0.5	200	2,000	1,000	-	-	-	1,000	50F2D154□**	
0.18	10.5	7.0	12.5	7.5±1.5	5.0	0.5	200	2,000	1,000	-	-	-	1,000	50F2D184□**	
0.22	11.5	7.0	12.5	7.5±1.5	5.0	0.5	200	2,000	1,000	-	-	-	1,000	50F2D224□**	
0.27	11.5	7.0	14.0	7.5±1.5	5.0	0.6	200	2,000	-	1,000	-	-	-	50F2D274□**	
0.33	13.0	7.5	15.0	7.5±1.5	5.0	0.6	100	1,500	-	500	-	-	-	50F2D334□**	
0.39	13.5	8.0	15.0	7.5±1.5	5.0	0.6	100	1,000	-	500	-	-	-	50F2D394□**	
0.47	14.5	9.0	16.0	7.5±1.5	5.0	0.6	100	1,000	-	500	-	-	-	50F2D474□**	

※LS:Please refer to Taping specification section.

◆ STANDARD SIZE

□:Capacitance Tolerance **:Taping

Rated Voltage	Cap(μF)	Dimensions (mm)						Typical Packaging Quantity (pcs)								Part No.
								Long Lead type		Taping Ammo Pack Type - Style						
		A	B	C	F	*LS±0.5	d	Bag	Carton	TV	TF	—	—	TS		
100 Vdc	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D471□**	
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D561□**	
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D681□**	
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D821□**	
	0.001	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D102□**	
	0.0012	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D122□**	
	0.0015	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D152□**	
	0.0018	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D182□**	
	0.0022	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D222□**	
	0.0027	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D272□**	
	0.0033	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D332□**	
	0.0039	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	100F2D392□**	
	0.0047	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	100F2D472□**	
	0.0056	6.0	3.5	7.5	3.5±0.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	100F2D562□**	
	0.0068	6.5	3.0	9.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	8,000	2,000	—	—	—	2,000	100F2D682□**	
	0.0082	6.5	3.0	9.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	8,000	2,000	—	—	—	2,000	100F2D822□**	
	0.01	7.0	4.0	10.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D103□**	
	0.012	7.5	4.0	10.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D123□**	
	0.015	7.5	4.0	10.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	100F2D153□**	
	0.018	8.0	4.0	10.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D183□**	
	0.022	8.0	4.0	12.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D223□**	
	0.027	8.0	4.0	12.0	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D273□**	
	0.033	8.5	4.0	12.5	5.0±1.0	5.0	0.5	200	4,000	2,000	—	—	—	2,000	100F2D333□**	
	0.039	8.5	4.5	12.5	5.0±1.0	5.0	0.5	200	3,000	2,000	—	—	—	2,000	100F2D393□**	
0.047	9.0	4.5	12.5	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D473□**		
0.056	9.0	5.5	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D563□**		
0.068	9.0	5.5	13.0	5.0±1.0	5.0	0.5	200	3,000	1,000	—	—	—	1,000	100F2D683□**		
0.082	9.5	6.0	13.0	7.5±1.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	100F2D823□**		
0.1	10.5	6.5	13.5	7.5±1.5	5.0	0.5	200	2,000	1,000	—	—	—	1,000	100F2D104□**		
0.12	10.5	6.0	15.0	7.5±1.5	5.0	0.6	200	2,000	—	—	—	—	—	100F2D124□**		
0.15	11.5	7.0	15.0	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D154□**		
0.18	12.5	7.0	15.5	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D184□**		
0.22	13.5	8.5	15.5	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	100F2D224□**		
200 Vdc	0.00047	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D471□**	
	0.00056	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D561□**	
	0.00068	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D681□**	
	0.00082	6.0	3.0	7.5	3.5±0.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D821□**	
	0.001	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D102□**	
	0.0012	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D122□**	
	0.0015	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D152□**	
	0.0018	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D182□**	
	0.0022	6.0	3.0	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D222□**	
	0.0027	6.5	3.5	7.5	3.5±1.5	5.0	0.5	200	10,000	3,000	—	—	—	3,000	200F2D272□**	
	0.0033	6.5	3.5	9.5	3.5±1.5	5.0	0.5	200	10,000	2,000	—	—	—	2,000	200F2D332□**	
	0.0039	6.5	3.5	9.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	8,000	2,000	—	—	—	2,000	200F2D392□**	
	0.0047	7.0	3.5	9.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	8,000	2,000	—	—	—	2,000	200F2D472□**	
	0.0056	7.5	4.0	9.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D562□**	
	0.0068	7.5	4.0	10.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D682□**	
	0.0082	7.0	4.0	12.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	5,000	2,000	—	—	—	2,000	200F2D822□**	
	0.01	7.5	4.5	12.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	2,000	—	—	—	2,000	200F2D103□**	
	0.012	8.0	4.5	12.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D123□**	
	0.015	8.0	4.5	12.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D153□**	
	0.018	8.5	5.0	12.5	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	4,000	1,000	—	—	—	1,000	200F2D183□**	
	0.022	9.0	5.0	13.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D223□**	
	0.027	9.5	5.5	13.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D273□**	
	0.033	10.0	6.0	13.0	5.0 ^{+1.0} _{-0.8}	5.0	0.5	200	3,000	1,000	—	—	—	1,000	200F2D333□**	
	0.039	10.0	6.0	15.0	7.5±1.5	5.0	0.5	200	3,000	750	—	—	—	750	200F2D393□**	
0.047	11.0	6.0	15.0	7.5±1.5	5.0	0.5	200	2,000	750	—	—	—	750	200F2D473□**		
0.056	11.0	6.5	15.0	7.5±1.5	5.0	0.5	100	2,000	—	500	—	—	—	200F2D563□**		
0.068	11.5	7.0	15.0	7.5±1.5	5.0	0.6	100	2,000	—	500	—	—	—	200F2D683□**		
0.082	11.5	7.0	18.0	7.5±1.5	5.0	0.6	100	2,000	—	—	—	—	—	200F2D823□**		
0.1	12.5	7.5	18.5	7.5±1.5	5.0	0.6	100	1,000	—	—	—	—	—	200F2D104□**		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[F339X134748MIP2T0](#) [F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1500160010P15](#) [FKP1R031007D00JYSD](#) [FKP1R031507E00JYSD](#)
[FKP1U024707E00KYSD](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A451GK223M040A](#)
[A561ED221M450A](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [R49AN347000A1K](#) [EEC2G505HQA406](#) [B25668A6676A375](#) [B25673A4282E140](#)
[BFC233868148](#) [BFC2370GC222](#) [C3B2AD44400B20K](#) [C4ASWBU3220A3EK](#) [CB027C0473J--](#) [CB177I0184J--](#) [CB182K0184J--](#) [23PW210](#)
[950CQW5H-F](#) [SBDC3470AA10J](#) [SCD105K122A3-22](#) [2N3155](#) [A571EH331M450A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#)
[QXL2E473KTPT](#) [445450-1](#) [B25669A3996J375](#) [46KI322000M1M](#) [46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [MKP383510063JKP2T0](#)
[MKPY2-.02230020P15](#) [MKT 1813-368-015](#) [4055292001](#) [46KN410000N1K](#) [EEC2E106HQA405](#) [EEC2G205HQA402](#) [EEC2G805HQA415](#)
[P409CP224M250AH470](#) [82EC2150DQ50K](#)