




Your Power Safeguard™
您的电路安全卫士

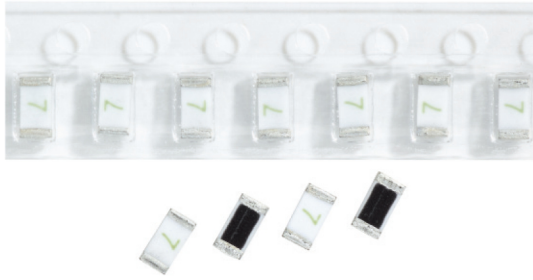

1206, RoHS Compliant & Pb-Free SURFACE MOUNT CHIP FUSE (SLOW-BLOW) 表面贴装片式保险丝 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

50A 63V AC (500mA-3A) 35A 24V AC (3.15A-7A)
50A 63V DC (500mA-3A) 50A 32V DC (3.15A-7A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UR			cUR			
		L1	L2	L3	L1	L2	L3	
12T-0500L	500mA			●			●	0.0182
12T-0630L	630mA			●			●	0.0418
12T-0750L	750mA			●			●	0.0684
12T-0800L	800mA			●			●	0.0699
12T-010L	1A			●			●	0.110
12T-013L	1.25A			●			●	0.125
12T-015L	1.5A			●			●	0.170
12T-016L	1.6A			●			●	0.190
12T-020L	2A			●			●	0.250
12T-025L	2.5A			●			●	0.900
12T-030L	3A			●			●	1.300
12T-032L	3.15A	●	●		●	●		1.401
12T-035L	3.5A	●	●		●	●		1.714
12T-040L	4A	●	●		●	●		2.025
12T-050L	5A	●	●		●	●		4.225
12T-063L	6.3A	●	●		●	●		5.404
12T-070L	7A	●	●		●	●		6.305

● DENOTES FOR APPROVED ● 表示已取得安全认证
L1 DENOTES FOR 24V (L1 代表 24V) L2 DENOTES FOR 32V (L2 代表 32V)
L3 DENOTES FOR 63V (L3 代表 63V)


ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	1-120 seconds 1-120 秒
300%	0.05-3.00 seconds 0.05-3.00 秒
800%	0.0015-0.05 seconds 0.0015-0.05 秒

PACKING/ 包装:

5,000 PIECES TAPED AND REELED IN ONE BOX
每卷 5,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

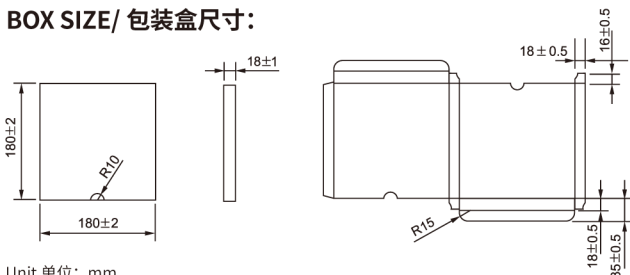


Unit 单位: mm


Dimensions/ 尺寸

Unit 单位: mm

TOP VIEW/ 上面:

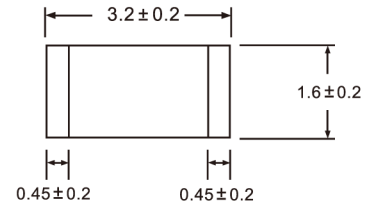

SIDE VIEW/ 侧面:



Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~90°C

Storing Temperature/ 储存温度: -55°C ~85°C


Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 235°C ±5°C, 3.5s+0.5/-0s

12T AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

12T 平均 I-T 曲线图 (仅供参考)

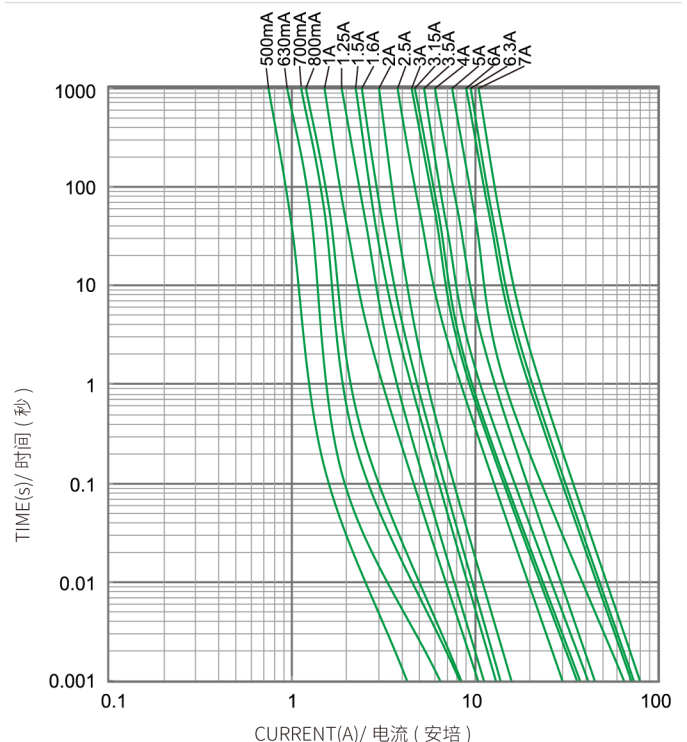

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [FT600-0500-2](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TF16SN3.15TTD](#) [41921000000](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [TR-3216FF4-R](#) [SST 1-1K](#) [SST 5 -1K](#) [SST 2-1K](#) [TR2-TCP500-R](#) [F60C500V12AS](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [3-122-714](#) [3-122-720](#) [3-122-718](#) [3-122-712](#) [3-122-716](#) [03081.25UR](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [SET 2A 125V \(G\)](#) [SET 1A 125V \(G\)](#) [SEF 10A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 4A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEF 7A 125V \(G\)](#) [SET 4A 125V \(G\)](#) [SET 3A 125V \(G\)](#) [SET 5A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [0154002.DRL](#) [0154008.DRL](#)