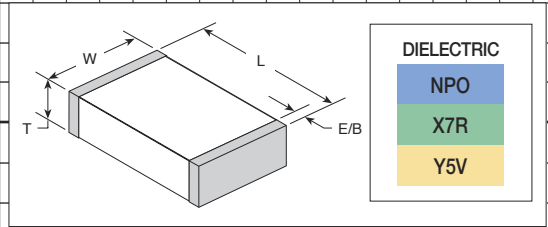
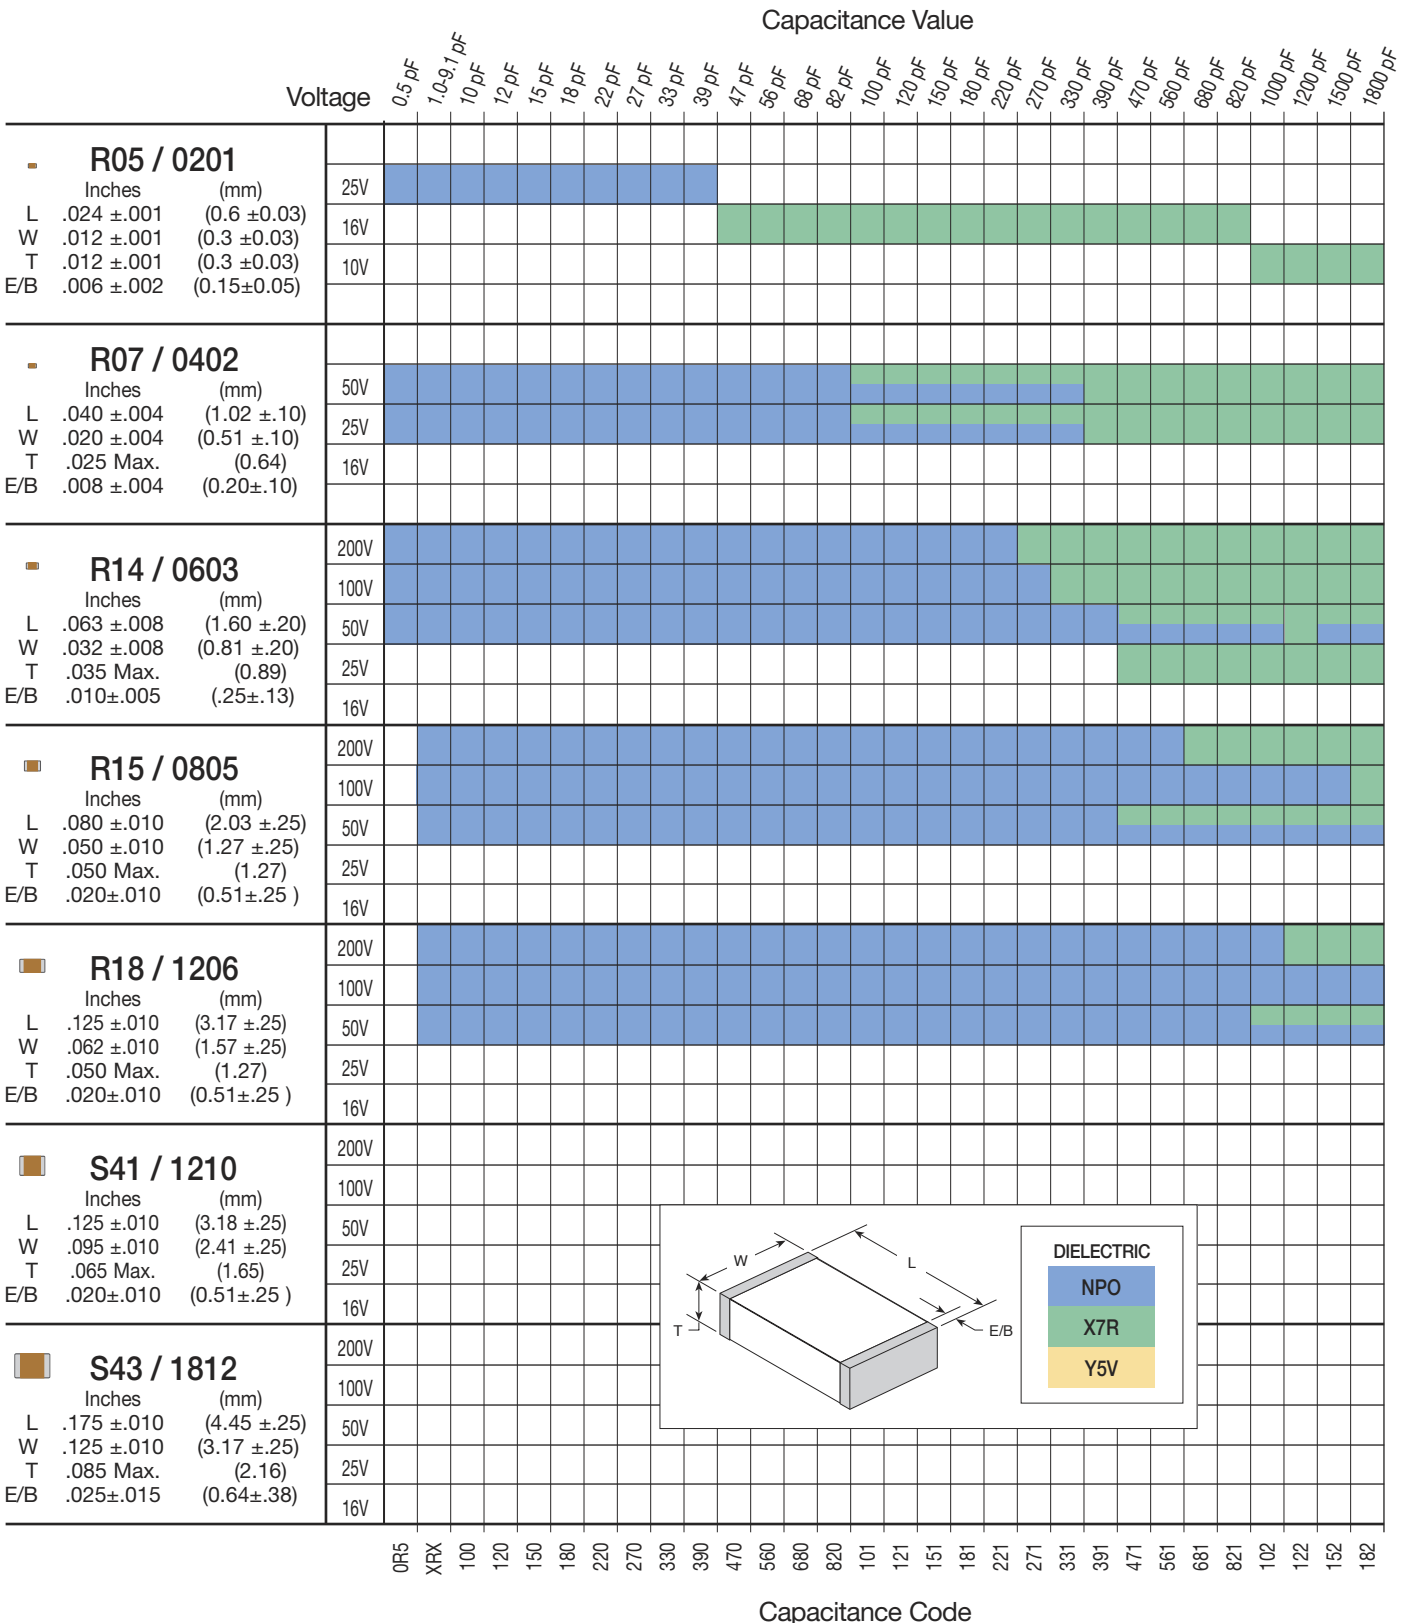
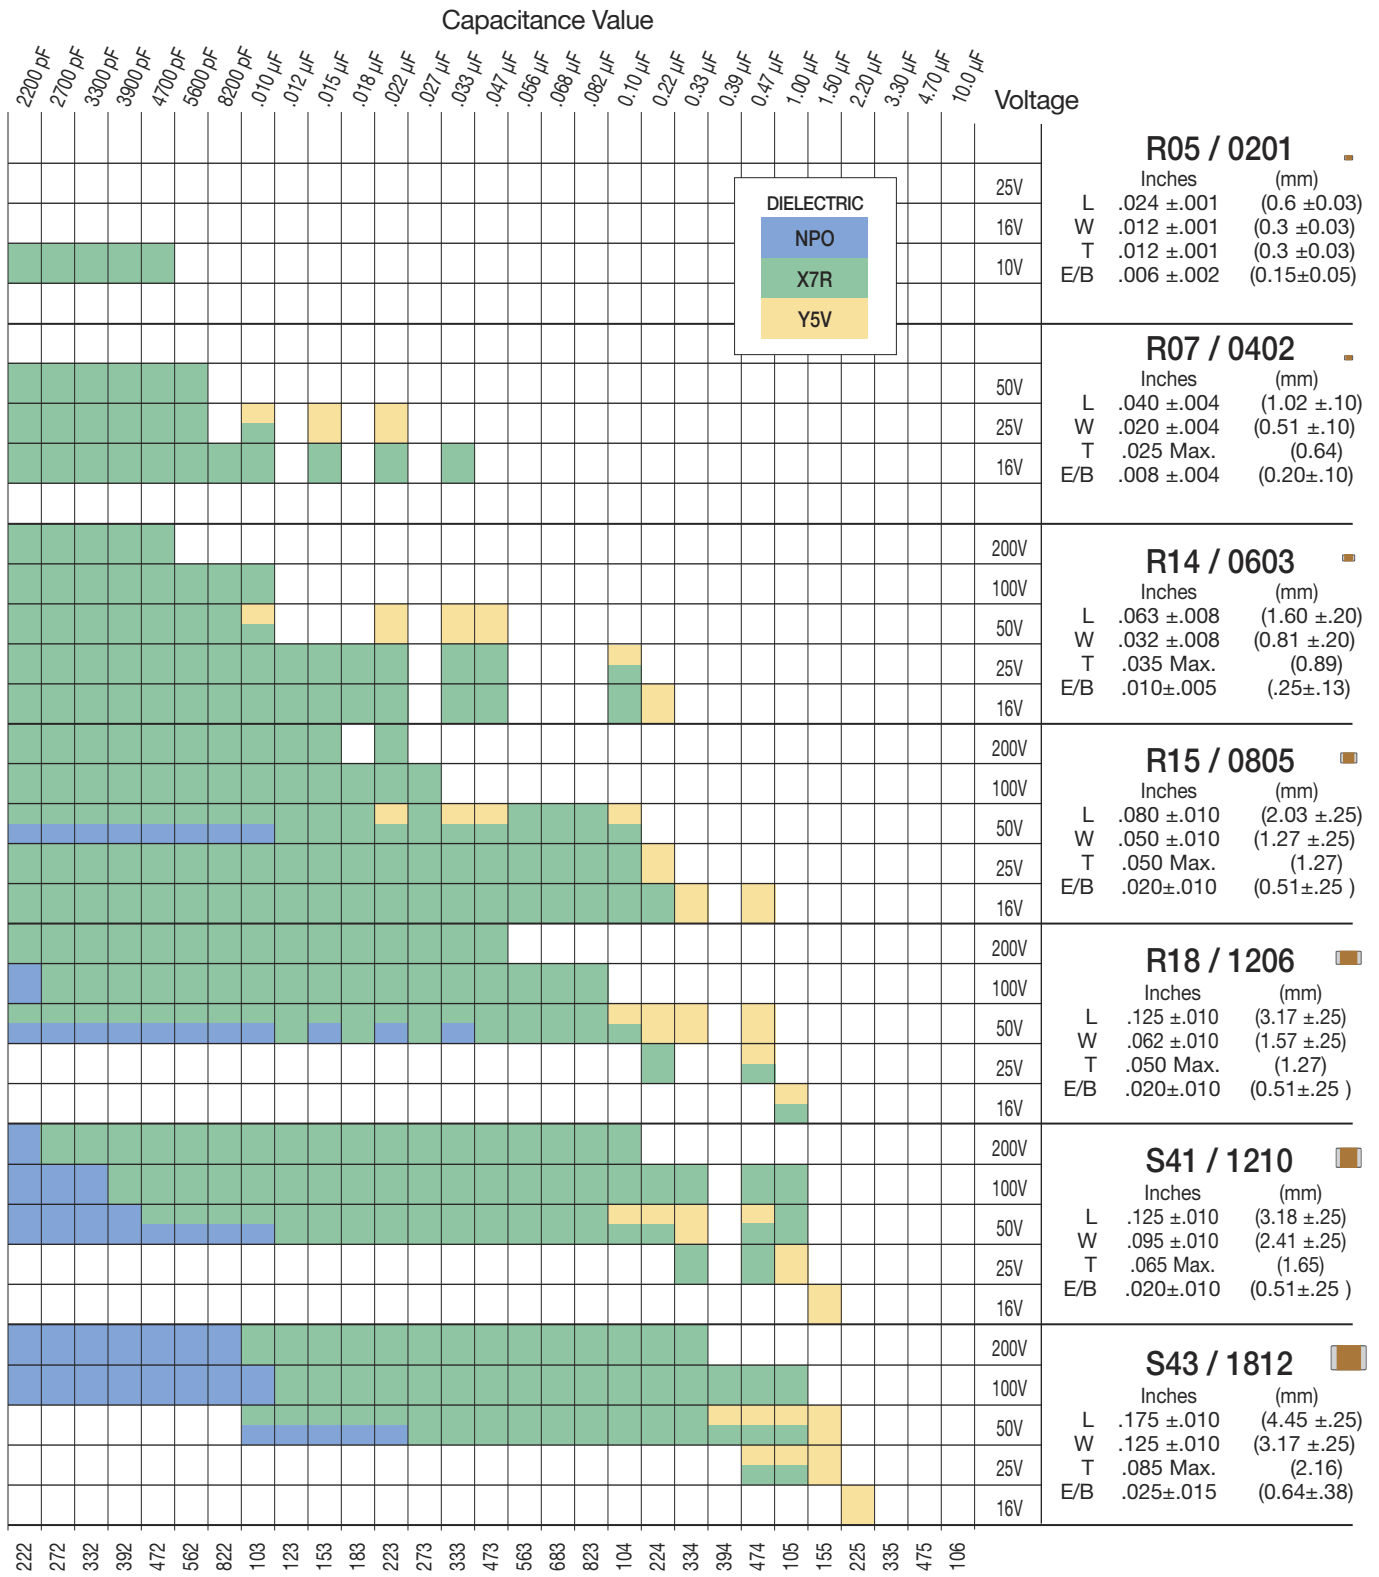


SURFACE MOUNT MLCCs 16 - 200 VDC



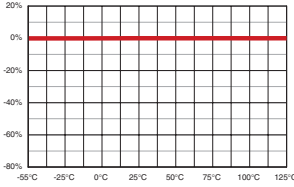
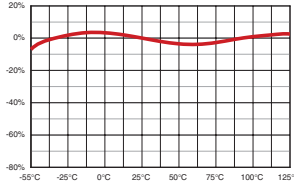
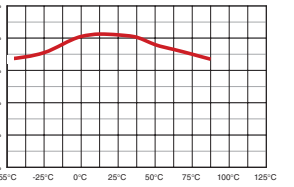
SURFACE MOUNT MLCCs 16 - 200 VDC

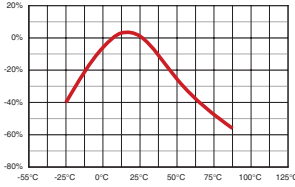
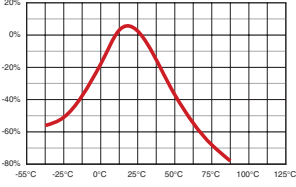


Dielectric specifications and part number breakdown may be found on pages 20 & 21.



ELECTRICAL CHARACTERISTICS

PARAMETER	NPO		X7R		X5R	
TEMPERATURE COEFFICIENT:	0± 30 ppm/°C	-55 to +125°C	± 15%	-55 to +125°C	± 15%	-55 to +85°C
						
DISSIPATION FACTOR:	.001 (0.1%) max		For Vrated = 50 VDC, DF = 2.5% max For Vrated = 125 VDC, DF = 3.0% max For Vrated = 116 VDC, DF = 3.5% max		For Vrated = 25 VDC, DF = 3.0% max For Vrated = 16 VDC: DF = 3.5% max For Vrated = 10 VDC: DF = 5.0% max	
AGING:	None		2.5% / decade hour			
INSULATION RESISTANCE:	IR @ 25°C, WVDC = 1000 F or 100G whichever is less ¹ IR @ 125°C, WVDC = 10% of 25°C rating				IR @ 25°C, WVDC = 1000 F or 100G whichever is less ²	
DIELECTRIC STRENGTH:	For Vrated = 6 - 200 VDC, DWV = 2.5 X WVDC, 25°C, 50mA max. For Vrated = 201 - 499 VDC, DWV = 2.0 X WVDC, 25°C, 50mA max. For Vrated = 500 - 999 VDC, DWV = 1.5 X WVDC, 25°C, 50mA max. For Vrated = 1000+ VDC, DWV = 1.2 X WVDC, 25°C, 50mA max.				DWV = 2.5 X WVDC, 25°C, 50mA max.	
TEST PARAMETERS:	C > 100 pF; 1kHz ±50Hz; 1.0±0.2 VRMS C 100 pF 1Mhz ±50kHz; 1.0±0.2 VRMS		1kHz ±50Hz; 1.0±0.2 VRMS		1kHz ±50Hz; 1.0±0.2 VRMS	
NOTES:			1) Tanceram X7R IR = 500 F or 10 G ,		2) Tanceram X5R IR = 500 F or 10 G	

PARAMETER	Z5U		Y5V	
TEMPERATURE COEFFICIENT:	+22% -56%	+10 to +85°C	+22% -82%	-30 to +85°C
				
DISSIPATION FACTOR:	For Vrated = 25 VDC, DF = 4.0 % max For Vrated = 16 VDC, DF = 5.0 % max		For Vrated = 25 VDC, DF = 5.0% max For Vrated = 16 VDC, DF = 7.0% max For Vrated = 10 VDC, DF = 9.0% max	
AGING:	5.0 % / decade hour		7.0% / decade hour	
INSULATION RESISTANCE:	IR @ 25°C, WVDC = 100 F or 10G whichever is less			
DIELECTRIC STRENGTH:	DWV = 2.5 X WVDC, 25°C, 50mA max.			
TEST PARAMETERS:	1kHz ±50Hz; 0.5±0.2 VRMS		1kHz ±50Hz; 1.0±0.2 VRMS	
NOTES:				



PART NUMBER BREAKDOWN

500	R15	N	101	J	V	4	T
VOLTAGE	CASE SIZE	DIELECTRIC	CAPACITANCE	TOLERANCE	TERMINATION	MARKING	PACKAGING
100 = 10 V	R05=0201	N = NPO	1st two digits are significant; third digit denotes number of zeros, R = decimal.	* B = ± 0.10 pF	V = Nickel Barrier with 100% Tin Plating (Matte)	4 = Unmarked	Tape Code
160 = 16 V	R07=0402	W = X7R		* C = ± 0.25 pF		6 = EIA "J" Code*	Tape Type
250 = 25 V	A11=0405	X = X5R		* D = ± 0.50 pF		*Not available on sizes 0402	U Embossed
500 = 50 V	R14=0603	Z = Z5U		F = ± 1 %			R Punched
101 = 100 V	R15=0805	Y = Y5V	1R0 = 1.0 pF	G = ± 2%			E Embossed
201 = 200 V	A18=0612		100 = 10 pF	J = ± 5%			T Punched
251 = 250 V	R18=1206		102 = 1,000 pF	K = ± 10%			None = Packaging
301 = 300 V	S41=1210		474 = 0.47 µF	M = ± 20%			Size 0201-1206 standard is Code
501 = 500 V	R29=1808			Z = +80 -20%			Tape specifications conform to EIA
631 = 630 V	S43=1812			*Values < 10 pF only			
102 = 1000 V	S47=2220						
202 = 2000 V	S49=1825						
302 = 3000 V	S48=2225						
402 = 4000 V							
502 = 5000 V							

Part number written: 500R15N101JV4T

PLEASE NOTE: Not all combinations of JDI P/Ns are valid. Please refer to the appropriate "How to Order" section a particular product or contact your Sales Representative if you need assistance.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)