




datasheet for LAS S WS
 article number: 934099100



product description:	order number: 934 099-100
description:	Safety connector for tower construction with screw connection for leads from 0.5 mm ² to 1.5 mm ² , outer diameter of lead max. 4.2 mm. Plug 4 mm with caged spring, 1000 V-system. Simple assembly by "Click-System".
typ:	LAS S WS schwarz / black
system:	4mm safety system
order number:	934 099-100
color	
other color versions:	
technical data	
measurement category acc. to IEC 61010:	CAT II
pin dimensions	4 mm
type of contact:	pin (spring loaded)
type of termination:	screw
rated voltage:	AC/DC 1000 V
rated current:	24 A
Please consider derating curve!	
contact resistance:	10 mOhm
material	
contact material:	contact pin: brass contact spring: copper - beryllium
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-15 °C to +70 °C
flammable class:	
housing (basic material):	UL 94 V - 2
drawing	

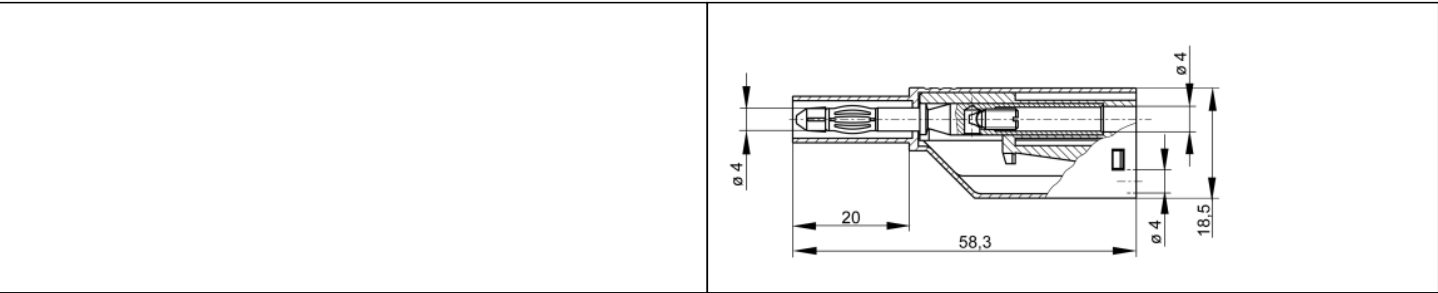

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [NYS508-O](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#)
[R921934000](#) [R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#)
[108-1000-106](#) [108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-V](#) [NYS508-W](#) [NYS508-Y](#)
[NYS511-R](#) [BP30-2BR10-B PKG](#) [BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#)