MicroPOD[™] AFBR-77D1SZ, AFBR-78D1SZ

10 Gbps/Channel Twelve Channel Parallel Fiber Optics Modules

Product Brief





The AFBR-77D1SZ Twelve Channel, Pluggable, Parallel Fiber Optics Transmitter and AFBR-78D1SZ Twelve Channel, Pluggable, Parallel Fiber Optics Receiver are high performance fiber optics modules for short-range parallel multilane data communication and interconnect applications. The high density optical modules are designed to operate over multimode fiber systems using a nominal wavelength of 850 nm.

The optical interface requires the user to provide a custom designed optical turn 1×12 ribbon cable $PRIZM^{\textcircled{B}}$ LightTurn[®] connector.


Applications

- 100 GbE and IB-QDR / IB-DDR / IB-SDR interconnects
- Data Aggregation, Backplane and Proprietary Protocol and Density Applications
- High Performance and High Productivity computer interconnects
- Switch Fabric interconnects

Part Number Ordering Options

		Base Part Number	
Modules for use with Flat Ribbon Jumper Cable	Transmitter	AFBR-77D1SZ AFBR-77D1Z	0-70 °C 20-55 °C
	Receiver	AFBR-78D1SZ AFBR-78D1Z	0-70 °C 20-55 °C
MicroPOD Evaluation Board (Tx)		AFBR-77EVB	
MicroPOD Evaluation Board (Rx)		AFBR-78EVB	

Where: Tx = Transmitter (77), Rx = Receiver (78)



Features

- Compliant to IEEE 802.3ba 100GbE (100GBASE-SR10 and nPPI) per lane
- Compliant to 12×QDR Infiniband
- Operates at 10.3125 Gbps per channel with 64b/66b encoded data for 100GbE application and at 10 Gbps with 8b/10b encoded data for IB-QDR application
- High Aggregate bandwidth: 120 Gbps per module
- High density footprint: 7.8 mm × 8.2 mm × 3.9 mm size
- Separate transmitter and receiver modules;
- 850 nm VCSEL array in transmitter; PIN array in receiver
- Links up to 150 m at 10.3125 Gbps with OM4 4700 MHz km 50 μm MMF
- Optical Interface: PRIZM[®] LightTurn[®] optical turn 1×12 ribbon fiber connector
- Electrical interface: 9×9 micro-LGA with 0.7424 mm pitch
- Low Power consumption: 3.0 W Max per Transmitter / Receiver pair (0 °C to 70 °C operating range)
- Dedicated signals for module address, module reset and host interrupt
- Two Wire Serial (TWS) interface with maskable interrupt for expanded functionality including:
 - Individual channel functions: disable, squelch disable, lane polarity inversion, TX eye margin enable
 - A/D read back: module temperature and supply voltages, per channel laser current and laser power, or received power
 - Status: per channel Tx fault, electrical (transmitter) or optical (receiver) LOS, and alarm flags
 - Programmable equalization integrated with DC blocking caps at transmitter data input
 - Programmable receiver output swing and deemphasis level
 - Field-upgradable firmware capability
- 0 °C to 70 °C case temperature continuous operating range. 85 °C supported for short durations

Package Dimensions

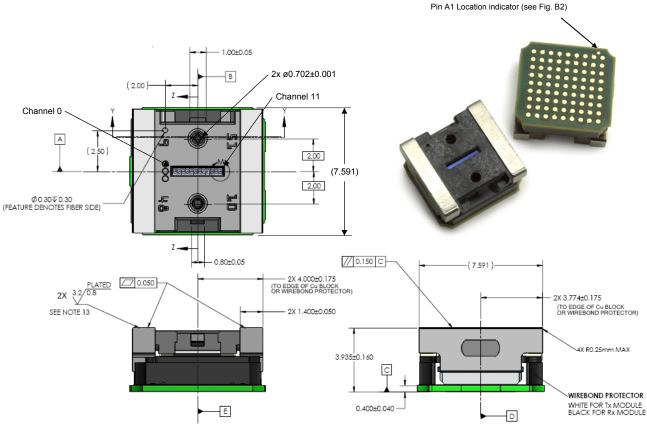


Figure 1. Module Top and Side View

For product information and a complete list of distributors, please go to our web site: **www.avagotech.com** Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2013 Avago Technologies. All rights reserved. Obsoletes AV02-2863EN AV02-4040EN - March 8, 2013



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for foxconn manufacturer:

Other Similar products are found below :

AFBR-709DMZ JPD1030-N521-4F AFCT-5805BZ 2EGL4997-B2DM-4F AFCT-57F3ATMZ AFBR-57R6AEZ 3H993921-4M41-02H DZ11A51-H8R1-4F ABCU-5741ARZ AFCT-739ASMZ 3H993321-4M41-01H DT00151-H1A2-4F AFBR-89CEDZ UH51543-BW11-7F 2EG14917-D2D8-4F AFCT-5765ATPZ JFM38U11-B313-4F LU25683-A001-9H ABCU-5740RZ UEA11121-8FS6-4F LD1807F-S54TD UB11123-8Z4-7F AS0B226-S99Q-7H 2EG08217-D2D-DF WNMEL00-84N00-EH AFBR-5710LZ AFBR-5715APZ HM3512E-P2 DT10121-H4W2-4F ABCU-5740ARZ AFBR-5921ALZ AS0A621-HARN-7H AS0A621-HASN-7H AFBR-79EIPZ-F5 AFCT-5961ATLZ AS0A621-H2S6-7H ASAA821-EARB0-7H WQ21823-DES1-7F AS0BC21-S40BE-7H AFBR-5715PZ AFBR-59R5LZ AFBR-57R5APZ AFBR-57R6APZ UEA1112C-4HK1-4H AS0B326-S78N-7F