


Large Size Capacitor Chips 500 - 5,000 VDC



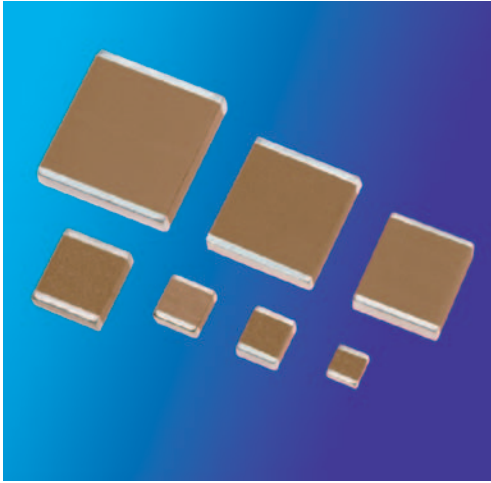


KEY FEATURES

- Rated Working Voltages from 500 to 15,000 VDC
- Low ESR Ceramic Out-performs Tantalums
- Compact MLC Designs Smaller Than Film or Disc
- MIL-PRF-55681 & Hi-Rel Screened Versions Available
- Custom Sizes, Voltages, and Values Available

APPLICATIONS

- Power Supplies
- Voltage Multipliers
- Data Isolation
- Surge Protection
- Industrial Control Circuits
- Custom Applications


MAXIMUM CAPACITANCE VS DC VOLTAGE RATING

			500 V	1K V	2K V	3K V	4K V	5K V
S49 / 1825	 Inches (mm) L .180 ±.010 (4.57 ±.25) W .250 ±.010 (6.35 ±.25) T .140 Max. (3.56 Max) E/B .025 ±.015 (0.64±.38)	NPO	183	123	562	222	122	391
		X7R	334	393	153	822	202	821
S47 / 2220	 Inches (mm) L .225 ±.015 (5.72 ±.38) W .200 ±.015 (5.08 ±.38) T .150 Max. (3.81 Max) E/B .025 ±.015 (0.64±.38)	NPO	183	153	562	272	152	471
		X7R	334	563	273	103	222	152
S48 / 2225	 Inches (mm) L .225 ±.010 (5.72 ±.25) W .255 ±.015 (6.48 ±.38) T .160 Max. (4.06 Max) E/B .025 ±.015 (0.64±.38)	NPO	273	183	822	332	182	681
		X7R	474	683	393	153	562	152

Available capacitance values include the following significant retma values and their multiples:



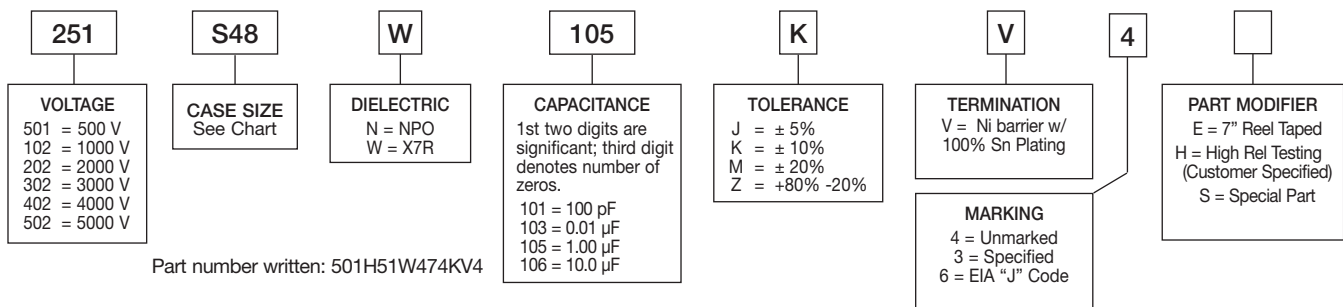

1.0 1.2 1.5 1.8 2.2 2.7 3.3 3.9 4.7 5.6 6.8 8.2 (1.0 = 1.0, 10, 100, 1000, etc.)

HOW TO ORDER



Large Size Capacitor Chips 50 - 5,000 VDC

MAXIMUM CAPACITANCE VS DC VOLTAGE RATING

			500 V	1K V	2K V	3K V	4K V	5K V	
H42 / 1515									
	Inches (mm)								
	L	.150 ±.015 (3.81 ±.38)	NPO	472	152	681	471	271	101
	W	.150 ±.015 (3.81 ±.38)	X7R	683	223	103	222	102	331
	T	.150 Max. (3.81 Max)							
E/B	.025 ±.015 (0.64±.38)								
H47 / 2520									
	Inches (mm)								
	L	.250 ±.018 (6.35 ±.46)	NPO	123	332	152	102	561	221
	W	.200 ±.015 (5.08 ±.38)	X7R	224	473	223	472	222	681
	T	.150 Max. (3.81 Max)							
E/B	.025 ±.015 (0.64±.38)								
H51 / 3530									
	Inches (mm)								
	L	.350 ±.035 (8.89 ±.89)	NPO	333	682	332	222	122	471
	W	.300 ±.030 (7.62 ±.76)	X7R	564	104	473	103	472	152
	T	.200 Max (5.08 Max)							
E/B	.025 ±.015 (0.64±.38)								
H54 / 3640									
	Inches (mm)								
	L	.360 ± .030 (9.14 ± .76)	NPO	393	822	332	222	152	681
	W	.400 ± .030 (10.16 ±.76)	X7R	824	224	563	473	153	822
	T	.200 Max (5.08 Max)							
E/B	.025 ±.015 (0.64±.38)								


Available capacitance values include the following significant retma values and their multiples:
 1.0 1.2 1.5 1.8 2.2 2.7 3.3 3.9 4.7 5.6 6.8 8.2 (1.0 = 1.0, 10, 100, 1000, etc.)
 Consult factory for sizes, values, & voltages not shown.

ELECTRICAL CHARACTERISTICS

Meets the standard NPO & X7R dielectric specifications listed in our current catalog except:

Dielectric Withstanding Voltage DWV = 750 VDC for 500 WVDC rated units,
 DWV = 945 VDC for 630 WVDC rated units,
 DWV = 1.2 X rated WVDC for ratings ≥ 1,000 WVDC

NOTE: Circuit applications above 1KVDC may require surface coating to prevent external arcing.

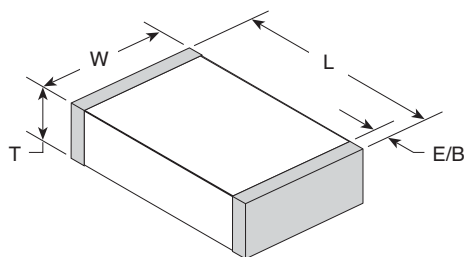

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)