





Photovoltaic MOSFET drivers of wide variation

Photovoltaic MOSFET Driver (APV1, 2)

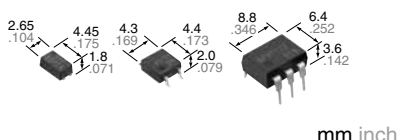

RoHS compliant

FEATURES

- 1. High-speed switching**
Since release time is typ. 0.1 ms, the MOSFET can be turned off quickly in a urgent situation.
- 2. High insulation**
DIP type: 5,000 V
SOP type: 2,500 V
SSOP type: 1,500 V
- 3. Extensive product lineup**
Products include SSOP, SOP4-pin and DIP6-pin.

TYPICAL APPLICATIONS

- Power supply (Vcc) for electronic circuits
- Driving MOSFET

TYPES

Output rating		Package	Part No.				Packing quantity	
Drop-out voltage (Typ.)	Short circuit current (Typ.)		Through hole terminal	Surface-mount terminal			Tube	Tape and reel
			Tube packing style	Tube packing style	Tape and reel packing style			
				Picked from 1/2/3-pin side*1	Picked from 4/5/6-pin side*2			
8.7V	14μA	DIP6-pin	APV1122	APV1122A	APV1122AX	APV1122AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.
8.7V	14μA	SOP4-pin*3	—	APV1121S	APV1121SX	APV1121SZ	1 tube contains 100 pcs. 1 batch contains 2,000 pcs.	
8.2V	8μA		—	APV2121S	APV2121SX	APV2121SZ		
8.2V	8μA	SSOP*4	—	—	APV2111VY	APV2111VW	—	

Notes: *1 SOP type is picked from 1/2-pin side, SSOP type is picked from 1/4-pin side.
 *2 SOP type is picked from 3/4-pin side, SSOP type is picked from 2/3-pin side.
 *3 For space reasons, the two initial letters of the part number "AP", package (SOP) indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number APV1121SX is V1121).
 *4 Tape and reel package is the standard packing style. Packing quantity of 1,000 pieces is possible. Please contact our sales office.
 For space reasons, the two initial letters of the part number "AP", package (SSOP) indicator "V" and the packing style are not marked on the device. (Ex. the label for product number APV2111VY is V2111).

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Remarks
Input	LED forward current	I _F	50mA			
	LED reverse voltage	V _R	5V			
	Peak forward current	I _{FP}	1A			f = 100 Hz, Duty Ratio = 0.1%
	Power dissipation	P _{in}	75mW			
I/O isolation voltage	V _{iso}	5,000V AC	2,500V AC	2,500V AC	1,500V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F			

Photovoltaic MOSFET Driver


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Condition
Input	LED operate current	Typical	0.6mA		0.85mA		$V_{oc} = 5V$
		Maximum	3mA				
	LED turn off current	Minimum	0.2mA				$V_{oc} = 1V$
		Typical	0.5mA			0.75mA	
LED dropout voltage	Typical	V_F		1.15V		$I_F = 10mA$	
	Maximum			1.5V			
Output	Drop-out voltage*	Minimum	6V		5V		$I_F = 10mA$
		Typical	8.7V		8.2V		
	Short circuit current**	Minimum	5 μA		3 μA		$I_F = 10mA$
		Typical	14 μA		8 μA		
Transfer characteristics	Turn on time***	Typical	T_{on}		0.4ms		$I_F = 10mA, C_L = 1,000pF$
	Turn off time***	Typical	T_{off}		0.1ms		
	I/O capacitance	Typical	C_{iso}		0.8pF		$V_B = 0V, f = 1MHz$
		Maximum			1.5pF		
Initial I/O isolation resistance	Minimum	R_{iso}			1,000M Ω		500V DC


*Drop-out voltage measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V




**Short circuit current measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V

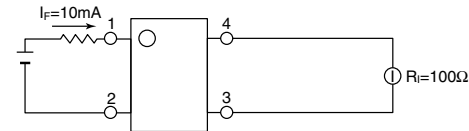


***Turn on/Turn off time measurement circuit
APV1122(A)

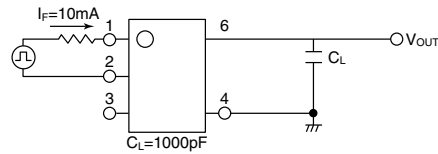

APV1121S, APV2121S, APV2111V

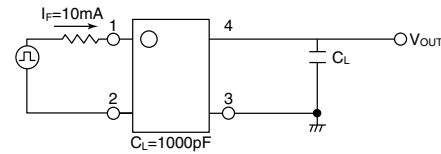

***Turn on time

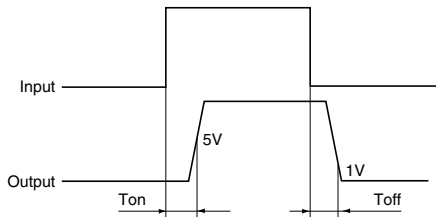

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.


Item	Symbol	Recommended value	Unit
Input LED current	I_F	10	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Drop-out voltage vs. ambient temperature characteristics
Input current: 10mA

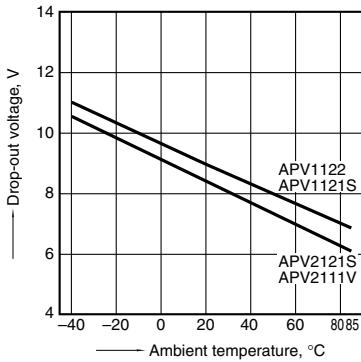


2. Short circuit current vs. ambient temperature characteristics
Input current: 10mA

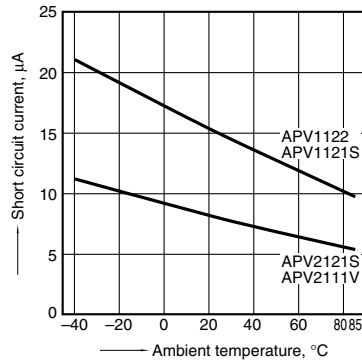


3. LED operate current vs. ambient temperature characteristics
Drop-out voltage: 5V

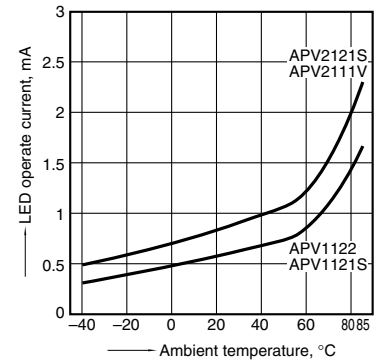


4. LED turn off current vs. ambient temperature characteristics
Drop-out voltage: 1V

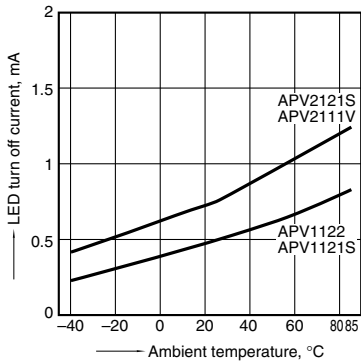


5. LED dropout voltage vs. ambient temperature characteristics
LED forward current: 10 to 50mA

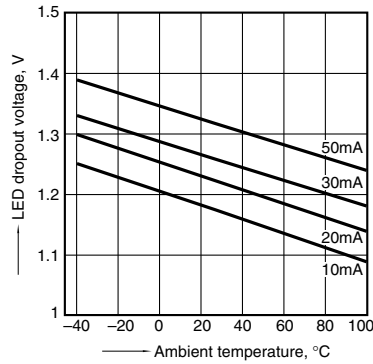


6. Turn on time vs. ambient temperature characteristics
LED forward current: 10mA
Load capacity: 1,000pF; output voltage: 5V

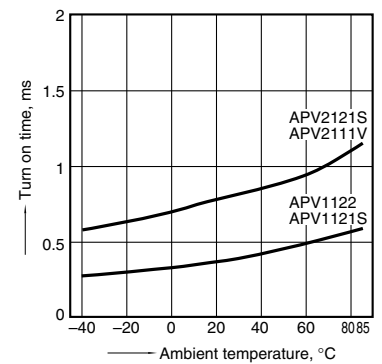


7. Turn off time vs. ambient temperature characteristics
LED forward current: 10mA
Load capacity: 1,000pF; output voltage: 1V

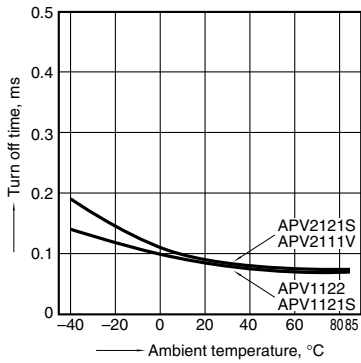


8. Turn on time vs. LED forward current characteristics
Load capacity: 1,000pF; output voltage: 5V

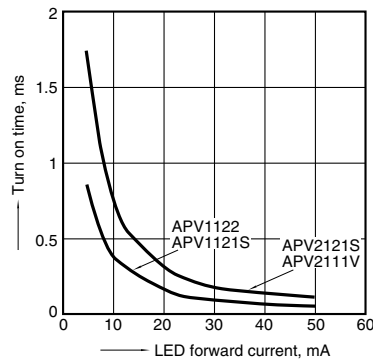


9. Turn off time vs. LED forward current characteristics
Load capacity: 1,000pF; output voltage: 1V

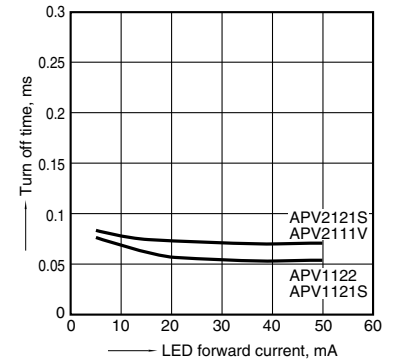

10. Drop-out voltage vs. LED forward current characteristics

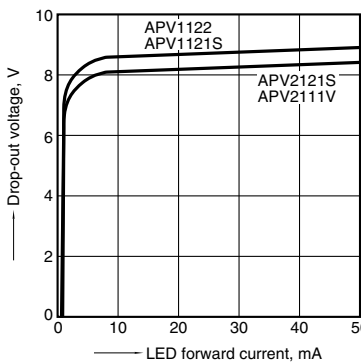

11. Short circuit current vs. LED forward current characteristics

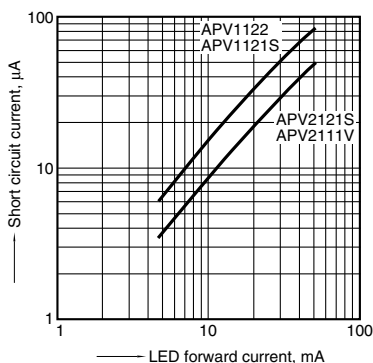

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Transistor Output Optocouplers](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[LTV-814S-TA](#) [LTV-815S-TA](#) [LTV-8241S](#) [LTV-824HS](#) [LTV-852S](#) [66095-001](#) [6N136-X017T](#) [6N136-X019T](#) [MCT6-X007](#) [MCT6-X007T](#)
[MOC8101-X009](#) [MOC8101-X017T](#) [PS2561-1-A](#) [PS2561A-1-W-A](#) [PS2561B-1-L-A](#) [PS2561DL-1Y-V-A](#) [PS2561L1-1-A](#) [PS2561L-1-V-A](#)
[PS2581AL2-A](#) [PS2706-1-A](#) [PS2815-1-A](#) [MRF658](#) [ELD207\(TA\)](#) [IL755-1X007](#) [IL755-2](#) [ILD2-X006](#) [ILD74-X001](#) [ILQ615-2X017](#) [ILQ615-3X016](#) [LDA102S](#) [LDA110S](#) [LDA202](#) [SFH601-4X007T](#) [SFH615A-2X009T](#) [SFH615A-4X001](#) [SFH615AGR-X007T](#) [SFH618A-3X006](#)
[SFH620A-2X007](#) [SFH690BT3](#) [PS2561-1-V-W-A](#) [PS2561A-1-V-A](#) [PS2561AL1-1-V-A](#) [PS2561AL-1-H-A](#) [PS2561AL-1-V-A](#) [PS2561BL-1-F3-Q-A](#) [PS2561DL-1Y-F3-A](#) [PS2561L1-1-L-A](#) [PS2561L1-1-V-Q-A](#) [PS2562-1-V-A](#) [PS2565L-1-A](#)