


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/22/02	XXXXXX	INITIAL RELEASE
A	02/28/14	2707	CORRECT BODY PLATING FROM GOLD TO NICKEL, UPDATE DRAWING FORMAT

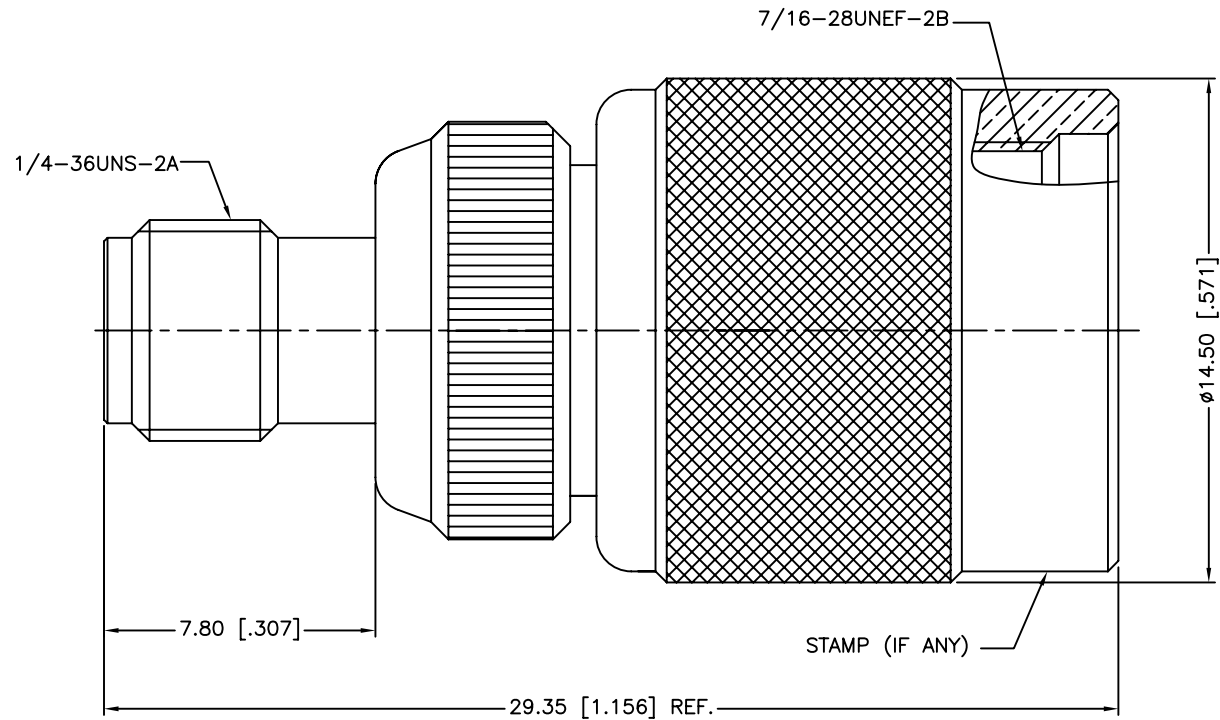

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -40°C TO +85°C

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
9	SHELL	BRASS	NICKEL	1	<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: <0.5 ± 0.05mm 0.5 - 6mm ± 0.10mm 6 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 - .236 = ± 0.004" .236 - 1.180 = ± 0.007" 1.180 - 4.724 = ± 0.012" ANGLES ± 1°</small>	DRAWN	M.ZHANG	02/28/14	SMA JACK TO TNC REVERSE POLARITY PLUG ADAPTER				
8	GASKET	SILICONE RUBBER	RED	1		CHECKED		PART DESCRIPTION					
7	RETAINER RING	BRASS	NICKEL	1		ISSUED		PART NO.					
6	RING	DELTRIN	NATURAL	1		SHEET	1 OF 1	242105RP					
5	WASHER	BRASS	NICKEL	1		CAD FILE		DWG. NO. 242105RP.DWG					
4	BODY	BRASS	NICKEL	1		C:/CONNEX/242105RP.DWG		REV.	A	SIZE	A	SCALE	NA
3	BODY	BRASS	NICKEL	1									
2	INSULATOR	PTFE	NATURAL	1									
1	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1									