

2.0×1.6mm for Consumer Products/ Mobile Communications/ Automotive



RoHS Compliant

### Features

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (2.0×1.6×0.40mm)
- Ceramic package
- Reflow compatible
- AEC-Q200 qualified (Please contact us for Automotive use)

### Applications

- Digital Electronics
- Consumer Products
- Mobile Communications, Bluetooth®, Wireless LAN
- Car Electronics

\* Bluetooth® Trademarks are owned by Bluetooth SIG Inc.

### How to Order

CX2016DB 27000

- ① Series (CX2016DB)  
 ② Frequency  
 ③ Load Capacitance    ④ Frequency Tolerance  
**D0** 8 pF    **G** ±15×10<sup>-6</sup>  
 ⑤ Operating Temp. Range    ⑥ Frequency Temp. Stability  
**EJ** -10 to +70°C    ±15×10<sup>-6</sup>  
**LJ** -30 to +85°C    ±15×10<sup>-6</sup>  
**PS** -40 to +125°C    ±50×10<sup>-6</sup>  
 ⑦ Individual Specification

Packaging (Tape & Reel 1000/ 3000 pcs./ reel)

### Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f <sub>nom</sub>	16000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f <sub>tol</sub>	±15	×10 <sup>-6</sup>	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T <sub>use</sub>	-10 to +70    -30 to +85    -40 to +125	°C	
Storage Temp. Range	T <sub>stg</sub>	-40 to +85    -40 to +125	°C	
Frequency Temp. Characteristics	f <sub>tem</sub>	±15    ±50	×10 <sup>-6</sup>	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
16000≤f <sub>nom</sub> <18000kHz	200Ω max.
18000≤f <sub>nom</sub> <26000kHz	150Ω max.
26000≤f <sub>nom</sub> <40000kHz	60Ω max.
40000≤f <sub>nom</sub> ≤60000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
16000≤f <sub>nom</sub> ≤60000kHz	10μW (100μW max.)

### Dimensions

(Unit: mm)

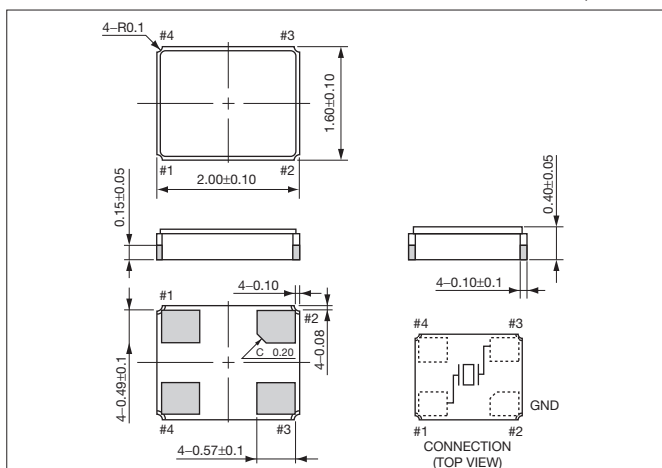

### Recommended Land Pattern

(Unit: mm)

