

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

ORIGINAL

①

②

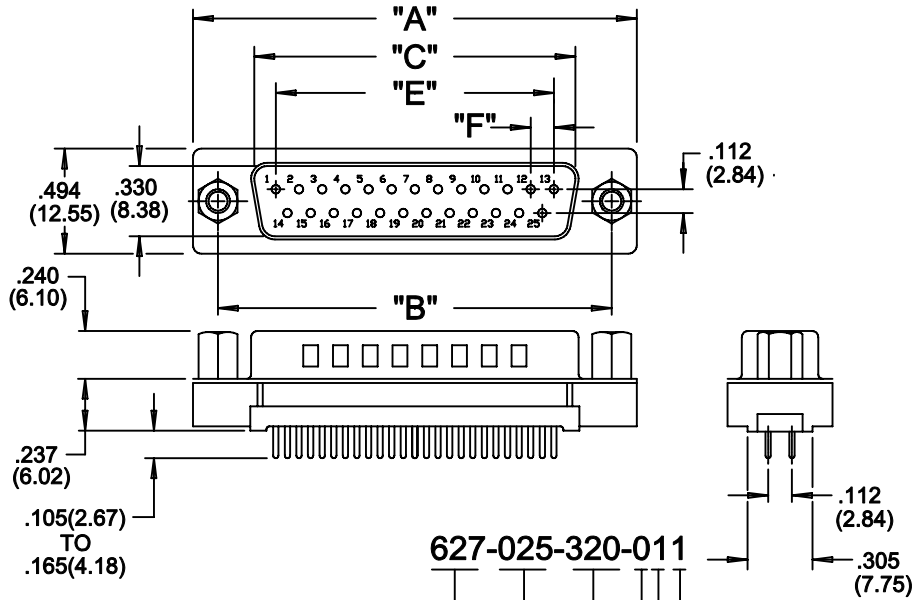

ORDERING CODE

- SERIES _____
- NUMBER OF CONTACTS _____
- CONTACT FINISH CODE _____
- CONNECTOR MATERIAL CODE: _____
- 0- BRASS
5- BRASS HIGH TEMP INSULATOR
- GROUNDING FEATURE _____
- 1- LOW PROFILE PLASTIC (POLYESTER)
- MOUNTING OPTIONAL _____
- 1- .125(3.18) DIA. THROUGH HOLE
 - 2- 4-40 UNC THREADED INSERT
 - 3- 4-40 UNC HEX THREADED STANDOFF
 - 4- 4-40 UNC THREADED INSERT WITH DIP SOLDER PRONGS
 - 5- 4-40 UNC THREADED STANDOFF WITH DIP SOLDER PRONGS
 - 6- 4-40 UNC THREADED INSERT WITH BOARDLOCKS
 - 7- 4-40 UNC THREADED STANDOFF WITH BOARDLOCKS
 - 8- 4-40 UNC THREADED FIXED STANDOFF

627-025-320-011

MATERIALS:

INSULATOR: THERMOPLASTIC POLYESTER, UL94V-0
CHEMICAL RESISTANCE, COLOR BLACK

SHEEL: STEEL, NICKEL PLATED

CONTACT: BRASS

GOLD FLASH (CONTACT CODE 220)

15 MICROINCHES GOLD (CONTACT CODE 320)

30 MICROINCHES GOLD (CONTACT CODE 620)

TIN PLATING ON TAIL ENDS

ELECTRICAL:

CURRENT RATING: 5 AMPERES

DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC rms AT SEA LEVEL

INSULATION RESISTANCE: 5000 MEGOHMS MIN.

CONTACT RESISTANCE: 10 MILLIOHMS MAX.

WORKING TEMPERATURE: -55° TO +125° C

NUMBER OF CONTACTS	"A"		"B"		"C"		"E"		"F"	
	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)
9	1.214	(30.84)	.984	(24.99)	.667	(16.92)	.432	(10.97)	.108	(2.74)
15	1.545	(39.24)	1.312	(33.32)	.994	(25.25)	.756	(19.20)	.108	(2.74)
25	2.088	(53.04)	1.852	(47.04)	1.534	(38.96)	1.304	(33.12)	.109	(2.76)
37	2.730	(69.34)	2.500	(63.50)	2.182	(55.42)	1.956	(49.68)	.109	(2.76)

**627 SERIES SUBMINIATURE D CONNECTOR
PLUG(PIN) VERTICAL PCB, PLASTIC BODY**

DRAWN: F.BRIONES

DATE: NOV. 26/97

CHECKED:

DATE:

PART NUMBER

SEE ORDERING CODE

DRAWING NUMBER

627-000-003

ISSUE

3



THIS SERIES FULLY CONFORMS
TO THE EUROPEAN UNION
DIRECTIVES 2002/95/EC AND
2002/96/EC FOR RoHS COMPLIANCY.

SALES/627000



EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.