

**AS85049/15 and AS85049/16**  
**45° and 90° Qwik-Ty® Strain Reliefs**  
**Self-Locking Coupling • Optional Ground Lug**



CONNECTOR DESIGNATOR:	
<b>H</b>	MIL-DTL-38999, Series III and IV EN3645

**SELF-LOCKING  
COUPLING**

Configuration
— = Non-Self-Locking
<b>N</b> = Non-Detented
<b>G</b> = Self-Locking with Ground Lug
<b>H</b> = Non-Detented with Ground Lug
<b>S</b> = Self-Locking without Ground Lug

Basic Part Number
M85049/15 = 45°
M85049/16 = 90°

**M85049/15**

**G 11 N**

Shell Size

Finish
<b>A</b> = Anodize, Black
<b>N</b> = Electroless Nickel
<b>W</b> = 1,000 Hour Cadmium Olive Drab over Electroless Nickel
<b>X</b> = Pure Dense Electrodeposited Aluminum
<b>Y</b> = Passivated
<b>Z</b> = Zinc-Nickel, Black

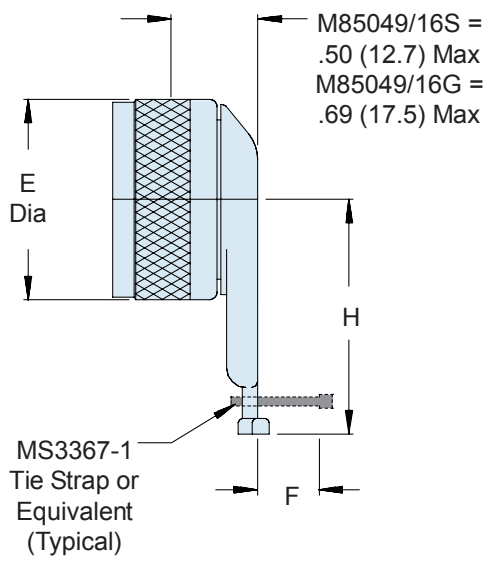
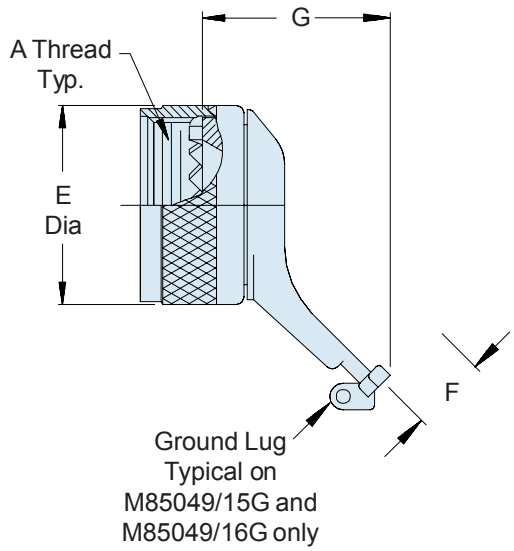


TABLE I: Shell Size, Thread, Cable Entry and Backshell Dimensions						
Shell Size	A Thread Class 2B	D Dia Max	F Max Cable Entry	M85049/15S G Max	M85049/15G G Max	M85049/16 H Max
9	M12 X 1 - 6H	.860 (21.8)	.264 (6.7)	1.030 (26.2)	1.210 (30.7)	1.220 (31.0)
11	M15 X 1 - 6H	.984 (25.0)	.392 (10.0)	1.030 (26.2)	1.210 (30.7)	1.290 (32.8)
13	M18 X 1 - 6H	1.160 (29.5)	.506 (12.9)	1.030 (26.2)	1.390 (35.3)	1.620 (41.1)
15	M22 X 1 - 6H	1.280 (32.5)	.631 (16.0)	1.090 (27.7)	1.390 (35.3)	1.660 (42.2)
17	M25 X 1 - 6H	1.410 (35.8)	.756 (19.2)	1.110 (28.2)	1.390 (35.3)	1.720 (43.7)
19	M28 X 1 - 6H	1.520 (38.6)	.845 (21.5)	1.210 (30.7)	1.390 (35.3)	1.720 (43.7)
21	M31 X 1 - 6H	1.640 (41.7)	.970 (24.6)	1.260 (32.0)	1.390 (35.3)	1.790 (45.5)
23	M34 X 1 - 6H	1.770 (45.0)	1.095 (27.8)	1.300 (33.0)	1.390 (35.3)	1.850 (47.0)
25	M37 X 1 - 6H	1.890 (48.0)	1.220 (31.0)	1.340 (34.0)	1.390 (35.3)	1.910 (48.5)

- APPLICATION NOTES**
1. Assembly identified with manufacturer's name and part number, space permitting.
  2. For complete dimensions, see the applicable Military Specification.
  3. Cable entry is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
  4. Metric dimensions (mm) are in parentheses.