



Quality Products. Service Excellence.

Type 3R Mild Steel Metering Cabinets *C3RMC Series*

Hinge Door with Handle



Application

- Designed for outdoor housing of metering transformers.

Standards

- CSA Approved, Type 3R
- Complies with
 - NEMA Type 3R
 - IEC 60529, IP24

Construction

- Formed and seam welded from 14 or 16 gauge steel.
- Smooth, continuously welded seams ground smooth.
- Formed lip on enclosure to exclude flowing liquids and contaminants.
- Padlockable "L" style handle.
- Oil resistant gaskets are permanently secured.
- Removable inner panel included.
- Collar studs provided for mounting inner panel.
- Doors may be easily removed for modifications and are interchangeable.
- Bonding stud provided on door and grounding stud installed in enclosure.
- Hinges are constructed from 304 stainless steel.
- Hinge pins are stainless steel.


Finish

- Cover and enclosure are phosphatized and finished with a recoatable ANSI 61 smooth Gray powder inside and out.
- Removable inner panel is finished in white powder coating.


Accessories

- Door Stop Kit
- Mounting Foot Kit
- Drip Shield Kit


Single Door

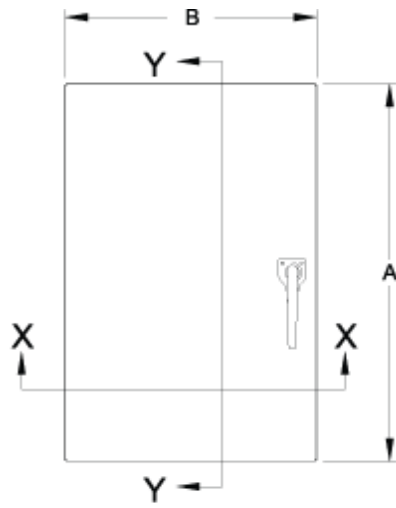

Front View

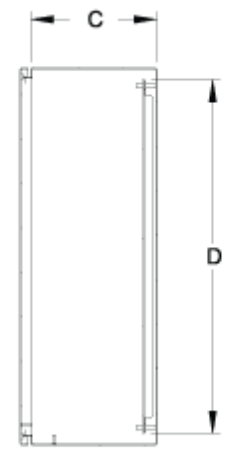


Section Y-Y



Section X-X


Double Door

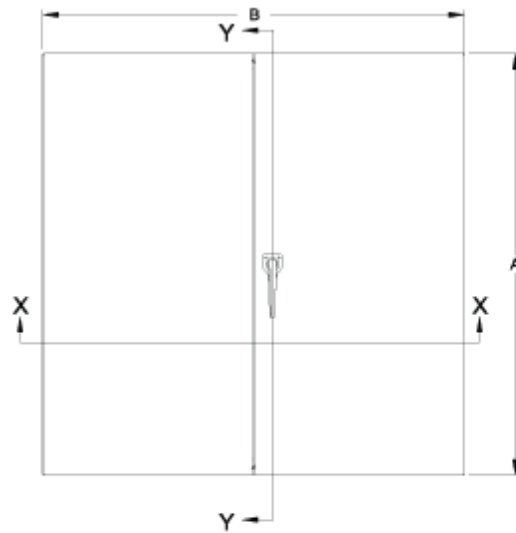

Front View



Section Y-Y

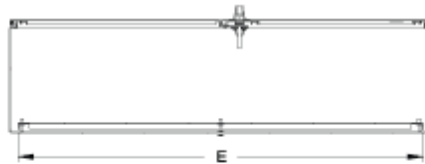

Section X-X

Part No.	Overall Dimensions			Panel Dimensions		Type of Door
	A	B	C	D	E	
C3RMC202010	20.00	20.00	10.00	18.17	18.17	Single
C3RMC271310	27.00	13.00	10.00	25.17	11.17	Single
C3RMC302010	30.00	20.00	10.00	28.17	18.17	Single

Part No.	Overall Dimensions			Panel Dimensions		Type of Door
	A	B	C	D	E	
C3RMC303010	30.00	30.00	10.00	28.17	28.17	Double
C3RMC363612	36.00	36.00	12.00	34.17	34.17	Double
C3RMC484812	48.00	48.00	12.00	46.17	46.17	Double

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.