


# Panel Mount Mini-DIN Receptacle

161-381/3-E, 161-381/4-E, 161-381/5-E,  
161-381/6-E, 161-381/8-E

**KOBI**CONN

Panel Mount Mini-DIN Receptacle 161-381/3-E, 161-381/4-E, 161-381/5-E, 161-381/6-E, 161-381/8-E

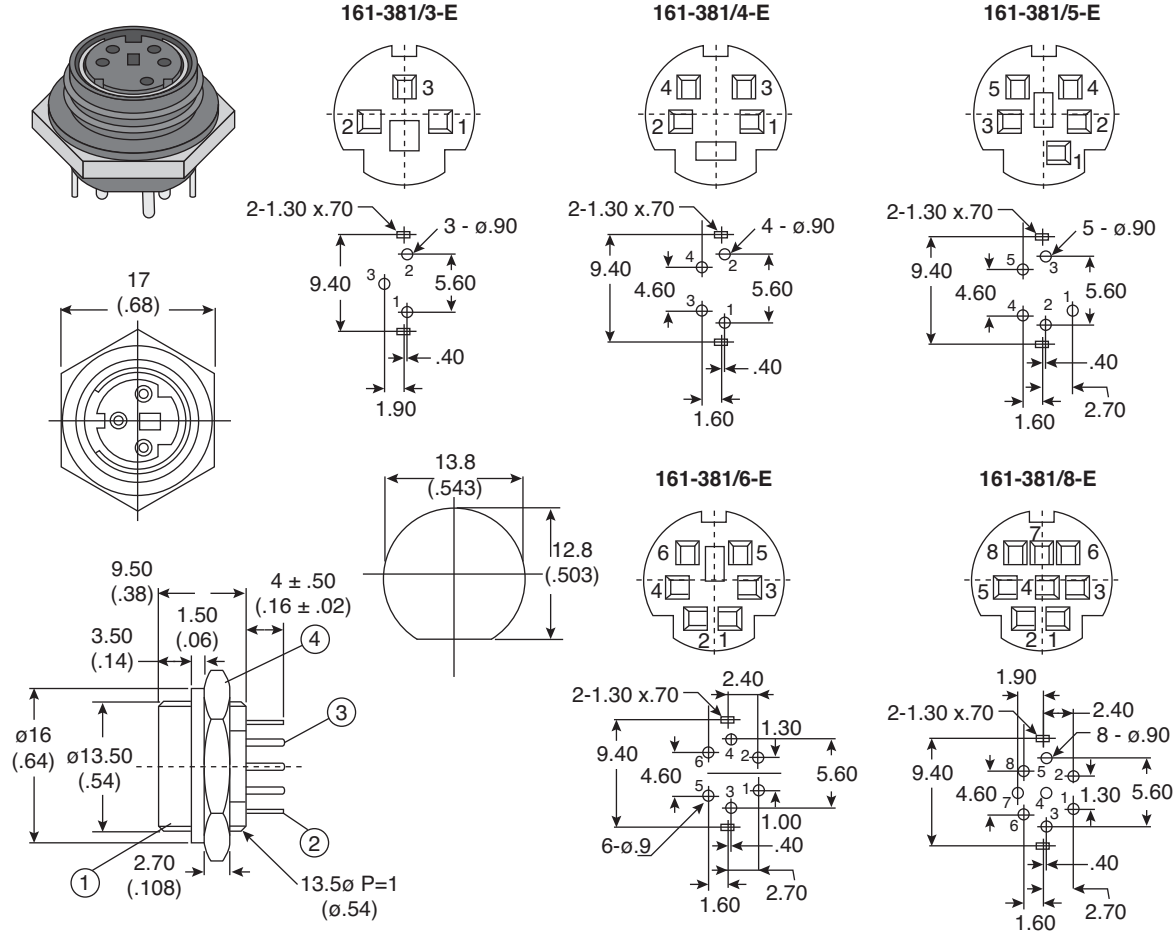

Dimensions: mm (in.)

LET	Part Name	Material	Finish
1	Housing	P.B.T.	-
2	Shield	Brass	Sn
3	Contact	Phosphor Bronze	Ag
4	Nut	Steel	Uni-Chrome

SPECIFICATIONS	
<b>Insulation Resistance:</b>	50M $\Omega$ Min. @250 VDC
<b>Contact Resistance:</b>	30m Max.
<b>Dielectric Strength:</b>	250 VAC for one minute
<b>Insertion Force:</b>	4.5 Kgf Max.
<b>Extraction Force:</b>	0.9 - 3 Kgf
<b>RoHS Compliant</b>	

Date Last Revised: 01-31-11

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

KC- 300868

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.