


MK26 Series Reed Sensors

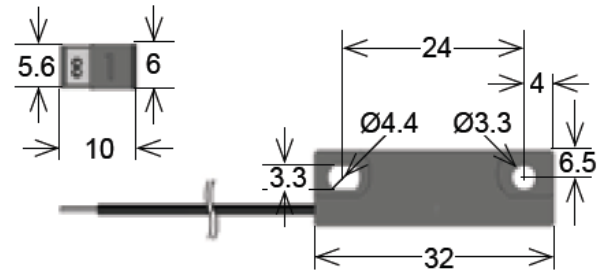

- Features: Standard Screw Fastening Reed Sensor with Cable Termination, For High Voltage Switches
- Applications: Position and Limit Switch, Hydraulic Actuator Position Indication & Others
- Markets: Appliance, Industrial, Security & Others

Part Description: **MK 26-0X00X-000X**

Contact QTY	Contact Form	Switch Model	Magnetic Sensitivity	Cable Length (mm)	Termination
1	A, B, C	35, 66, 85, 90	B, C, D, E, F	200, 300, 500, 1,000, 1,500, 2,000, 3,000, 5,000	w

Customer Options	Switch Model				Unit
	35	66	85	90	
Contact Data					
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	20	10	100	10	W
Switching Voltage (max.) DC or peak AC	200	200	1000	175	V
Switching Current (max.) DC or peak AC	1.0	0.5	1.0	0.5	A
Carry Current (max.) DC or peak AC	1.25	1.0	2.5	1.0	A
Contact Resistance (max.) @ 0.5V & 50mA	100	150	150	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.22	0.25	1.5	0.2	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	0.5	0.5	1.1	0.7	ms
Release Time (max.) Measured with no Coil Excitation	0.1	0.1	0.1	1.5	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10 ¹⁰	10 ¹⁰	10 ¹⁰	10 ⁹	GOhm
Capacitance (typ.) @ 10kHz across open Switch	0.3	0.4	0.5	1.5	pF

Series Datasheet – MK26 Reed Sensors


www.standexmeder.com

Housing and Cable Specifications	
Housing Material	PBT Glass Fibre Reinforced
Case Color	Black
Sealing Compound	Polyurethan
Cable Typ	Flat Cable / Round Cable
Cable Material	PVC
Cross Section (mm ²)	2 x 0.25 / 3x0,14

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature Cable not moved	-20 to 80	°C
Operating Temperature Cable moved	-05 to 80	°C
Storage Temperature	-20 to 80	°C

Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

Glossary Magnetic Sensitivity						
Sensitivity	B	C	D	E	F	G
AT Range	10-15	15-20	20-25	25-30	30-35	35-40

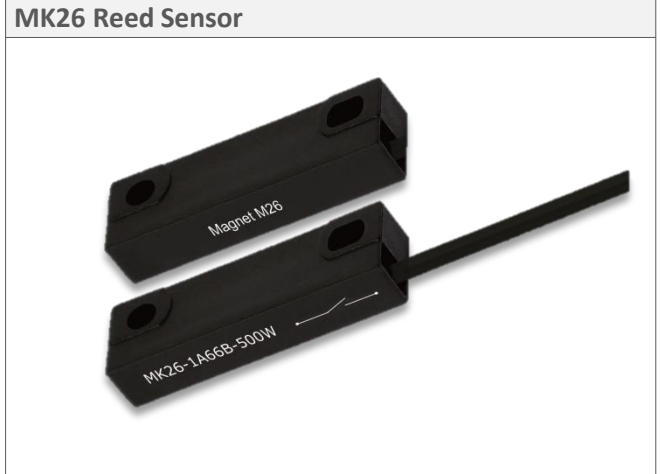

- ### Handling & Assembly Instructions
- Max torque of screw is 0,5Nm
 - Cable bending-radius is diameter x 15
 - Min. bending distance to housing is 5mm
 - Drag mark out of the mounting area forbidden
 - Decrease switching distance by mounting on iron
 - Do not use magnetically inductive screws
 - Series resistor recommended for > 5m cable length

