


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MINIMUM BUNDLE DIAMETER	MAXIMUM BUNDLE DIAMETER	LENGTH = L ±.2 [5]
MLT2.7WH-LP	50	2.0" [50]		10.2" [259]
MLT4WH-LP	50	2.0" [50]	4.0" [102]	14.3" [362]
MLT6WH-LP	50	2.0" [50]	6.0" [152]	20.5" [521]
MLT8WH-LP	50	2.0" [50]	8.0" [203]	26.8" [679]
MLT10WH-LP	50	2.0" [50]	10.0" [254]	33.0" [838]
MLT2.7WH-TL	250	2.0" [50]	2.7" [69]	10.2" [259]
MLT4WH-TL	250	2.0" [50]	4.0" [102]	14.3" [362]
MLT6WH-TL	250	2.0" [50]	6.0" [152]	20.5" [521]

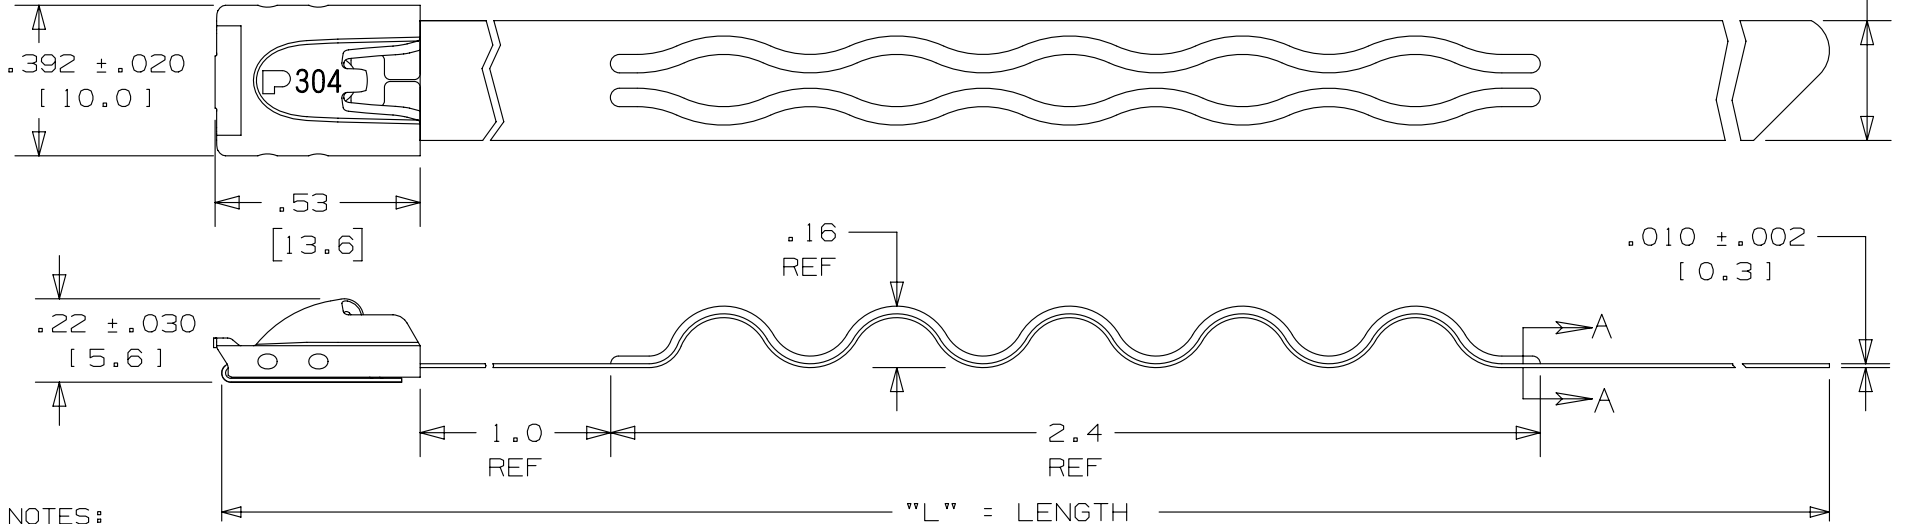


NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS (2000 NEWTONS) WHEN TESTED ON A 3" MANDREL EXCEPT MLT2.7WH-LP WHEN TESTED ON A 1 1/2" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:

.XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°

5. MATERIAL: 304 STAINLESS STEEL

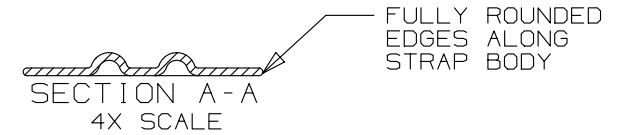

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
06A	6/12	JAMB	RGRO	RGRO	NOTE #1 REMOVED APPLICATION TOOL ST3MT, TOOL IS OBSOLETE	-----
05A	2/12	JAMB	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

<p>TITLE METAL LOCKING TIE HEAVY SERIES WAVE-TY 304 STAINLESS STEEL</p> <p>CUSTOMER DRAWING</p>					
<p>ITEM REVISION NAME N41122BS/07</p>					
<p>DATASET FILE NAME N41122BS_DC/07A</p>					
<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]</p> <p>.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °</p>					
<p>MATERIAL: 304 STAINLESS STEEL</p>			<p>DRAWING NUMBER: N41122BS_DC</p>		
<p>DRAWN BY JAMB</p>	<p>DATE 2/12</p>	<p>CHK DPN</p>	<p>SCALE 2:1</p>	<p>SHT 1 OF 1</p>	<p>SIZE A</p>