


## Model 2BA-MG Double Banana Plug To Minigator Test Clip Breakouts, Cable Assembly

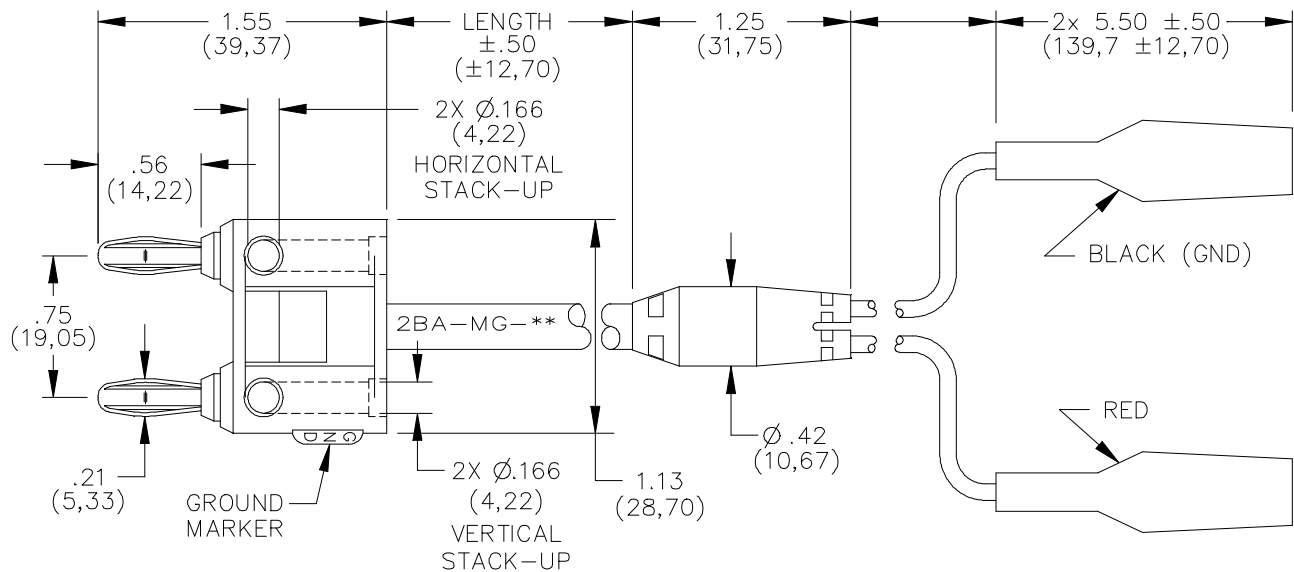

### FEATURES:

- Jaws open to .187" Max.
- Ideal for use with Pomona Model 2269 or any standard double Banana Jack
- Allows connection from a double Banana Binding Post to Alligator Clips

### MATERIALS:

Double Banana Plug – Spring; nickel plated Beryllium Copper. Body; nickel plated brass alloy 360 ½ hard.

Insulator; Polypropylene, color matches cable

Cable – Two conductor twisted pair

Breakout – Molded PVC, color matches cable

Breakout Leads – 20 AWG. 41 x 36 T.C. PVC insulated .087 inch O.D., Color: One Black, one Red

Miniature Alligator Clips – Plated steel, vinyl insulator, color matches wire

### RATINGS:

Operating Voltage: 45 VRMS

Operating Temperature: +122°F (+50°C) Max.

Cable Capacitance: 30 pf/ft

### ORDERING INFORMATION: Model 2BA-MG-XX

XX = Cable Lengths, Standard Lengths: 18" (457), 24" (610), 30" (762), 36" (914), 48" (1219) & 60" (1524).

Additional lengths can be quoted upon request.

Ordering Example: 2BA-MG-24 Indicates 24" in length

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA