

Radial Leaded Glass Encapsulated Style




Features:

- Rugged, low cost, very high reliability
- Operation from -50°C up to 300°C
- Values from 2186Ω to 1.38MΩ at 25°C
- Standard tolerance of ±3% at rated temp
- Temperature measurement and control
- Fast response time
- High temperature stability
- Glass encapsulation provides resistance to moisture and other environmental factors
- Available in ceramic reinforced glass body or glass bead configurations

Description:


MS radial leaded glass encapsulated thermistors provide a low cost option for applications that require superior stability and high temperature operation. The thermistors are glass encapsulated to allow for operation in a wide array of environments including high humidity and rapid thermal cycling. The small size allows the sensor to react quickly to small temperature changes. Contact the factory for specific design or application information or the availability of options.

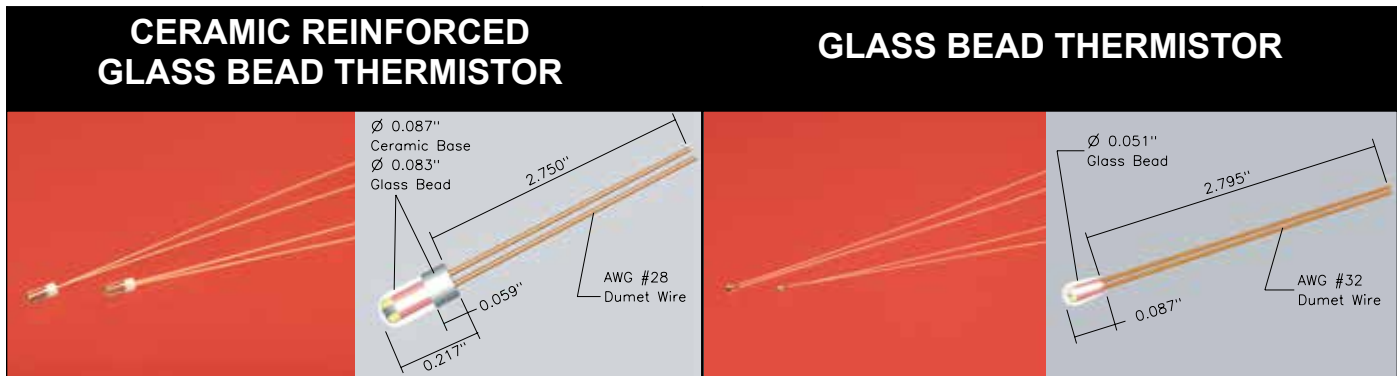

| MS Part Number | Resistance @25°C (Ohms) | Resistance Specification (±3%) | MS Matl | $\beta_{25/85}$ (Kelvin) | MS Part Number | Resistance @25°C (Ohms) | Resistance Specification (±3%) | MS Matl | $\beta_{25/85}$ (Kelvin) |
|---|-------------------------|--------------------------------|---------|--------------------------|---|-------------------------|--------------------------------|---------|--------------------------|
| GC2183T-3-0 | 2186 | 6,000Ω @ 0°C | T | 3420 ± 2% | GB2183T-3-0 | 2186 | 6,000Ω @ 0°C | T | 3420 ± 2% |
| GC5373U-3-0 | 5369 | 15,000Ω @ 0°C | U | 3480 ± 2% | GB5373U-3-0 | 5369 | 15,000Ω @ 0°C | U | 3480 ± 2% |
| GC1074U-3-0 | 10,739 | 30,000Ω @ 0°C | U | 3480 ± 2% | GB1074U-3-0 | 10,739 | 30,000Ω @ 0°C | U | 3480 ± 2% |
| GC4914A-3-100 | 49,120 | 3,300Ω @ 100°C | A | 3992 ± 2% | GB4914A-3-100 | 49,120 | 3,300Ω @ 100°C | A | 3992 ± 2% |
| GC9864N-3-200 | 98,633 | 550Ω @ 200°C | N | 4066 ± 3% | GB9864N-3-200 | 98,633 | 550Ω @ 200°C | N | 4066 ± 3% |
| GC2315R-3-200 | 231,440 | 1,000Ω @ 200°C | R | 4240 ± 3% | GB2315R-3-200 | 231,440 | 1,000Ω @ 200°C | R | 4240 ± 3% |
| GC1396V-3-200 | 1,388,100 | 4,000Ω @ 200°C | V | 4557 ± 3% | GB1396V-3-200 | 1,388,100 | 4,000Ω @ 200°C | V | 4557 ± 3% |
| Dissipation factor (δ) is 1.5mW/°C Time constant (τ) is 18 sec nominally Max operating temperature is 300°C | | | | | Dissipation factor (δ) is 0.75mW/°C Time constant (τ) is 6 sec nominally Max operating temperature is 300°C | | | | |

Standard resistance tolerance is ±3% at rated temperature

*See R/T tables on page 63.



Basic P/N Material Tol. Code Point-match Temperature (°C) (only used if other than 25°C)

Examples: GC1074U-3-0 Curve U material, ±3% at 0°C
 GB1396V-3-200 Curve V material, ±3% at 200°C

Resistance vs. Temperature Conversion Table Radial Leaded Glass Encapsulated NTC Thermistor

| MS Type | G_2183 | G_5373 | G_1074 | G_4914 | G_9864 | G_2315 | G_1396 |
|-------------------------------------|---------|---------|---------|---------|-----------|---------|-----------|
| Material | T | U | U | A | N | R | V |
| Beta ($\beta_{25/85}$) | 3420 | 3480 | 3480 | 3992 | 4066 | 4240 | 4557 |
| Temp. Coef. @25°C (α_{25}) | -3.75 | -3.82 | -3.82 | -4.42 | -4.46 | -4.64 | -4.99 |
| Resistance Ratio R_{25}/R_{50} | 6.59 | 6.81 | 6.81 | 9.22 | 9.47 | 10.30 | 12.34 |
| Temperature (°C) | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω) | Res (Ω) |
| -50 | 77,582 | 203,980 | 407,960 | | | | |
| -40 | 43,340 | 112,540 | 225,090 | | | | |
| -30 | 25,166 | 64,632 | 129,260 | | | | |
| -25 | 19,433 | 49,658 | 99,316 | 657,350 | 1,317,400 | | |
| -20 | 15,132 | 38,481 | 76,963 | 487,370 | 980,540 | | |
| -10 | 9,392 | 23,672 | 47,344 | 276,060 | 558,640 | | |
| 0 | 6,000 | 15,000 | 30,000 | 162,210 | 329,400 | 806,460 | |
| 10 | 3,935 | 9,765 | 19,531 | 98,322 | 198,900 | 478,760 | |
| 20 | 2,644 | 6,516 | 13,033 | 61,465 | 123,750 | 292,850 | |
| 25 | 2,186 | 5,369 | 10,739 | 49,120 | 98,633 | 231,440 | 1,388,100 |
| 30 | 1,817 | 4,448 | 8,896 | 39,517 | 79,126 | 184,110 | 1,085,000 |
| 40 | 1,274 | 3,100 | 6,201 | 26,065 | 51,870 | 118,680 | 676,470 |
| 50 | 910.6 | 2,203 | 4,406 | 17,599 | 34,790 | 78,291 | 432,530 |
| 60 | 662.2 | 1,593 | 3,187 | 12,140 | 23,831 | 52,757 | 283,030 |
| 70 | 489.5 | 1,171 | 2,343 | 8,641 | 16,643 | 36,258 | 189,200 |
| 80 | 367.4 | 874.6 | 1,749 | 6,120 | 11,834 | 25,376 | 129,000 |
| 85 | 319.9 | 759.8 | 1,520 | 5,213 | 10,042 | 21,366 | 107,250 |
| 90 | 279.6 | 662.3 | 1,325 | 4,459 | 8,556 | 18,064 | 89,570 |
| 100 | 215.6 | 508.3 | 1,016 | 3,300 | 6,282 | 13,062 | 63,256 |
| 110 | 168.4 | 394.9 | 789.8 | 2,478 | 4,679 | 9,585 | 45,382 |
| 120 | 133.0 | 310.4 | 620.8 | 1,886 | 3,532 | 7,131 | 33,041 |
| 125 | 118.6 | 276.3 | 552.7 | 1,653 | 3,083 | 6,181 | 28,339 |
| 130 | 106.1 | 246.7 | 493.3 | 1,453 | 2,700 | 5,373 | 24,387 |
| 140 | 85.61 | 198.0 | 396.0 | 1,133 | 2,088 | 4,098 | 18,232 |
| 150 | 69.71 | 160.5 | 320.9 | 892.8 | 1,632 | 3,161 | 13,796 |
| 160 | 57.27 | 131.2 | 262.5 | 710.9 | 1,289 | 2,464 | 10,557 |
| 170 | 47.46 | 108.3 | 216.5 | 571.6 | 1,028 | 1,940 | 8,164 |
| 180 | 39.64 | 90.01 | 180.0 | 463.7 | 827.8 | 1,542 | 6,377 |
| 190 | 33.36 | 75.40 | 150.8 | 379.3 | 672.0 | 1,237 | 5,028 |
| 200 | 28.28 | 63.62 | 127.3 | 312.8 | 550.0 | 1,000 | 4,000 |
| 225 | | | | 199.5 | 344.3 | 608.3 | 2,339 |
| 250 | | | | 132.6 | 224.7 | 386.5 | 1,432 |
| 275 | | | | 91.29 | 152.1 | 255.2 | 912.7 |
| 300 | | | | 64.87 | 106.4 | 174.3 | 602.6 |

This R/T Conversion Table is provided for reference only. MS uses the Steinhart-Hart equation to calculate the nominal $R_{T_{25}}$ value. 1°C tables are available upon request.

- α_{25} - Negative Temperature Coefficient of Resistance at 25°C expressed in %/°C. This is the percentage change in thermistor resistance for a 1°C change in its' body temperature at 25°C. α is particularly useful in calculating the required resistance tolerance necessary to guarantee sensor accuracy. α at temperatures other than 25°C is available upon request as tables in 1°C increments.

