

Miniature PCB Relay EJ

- 1 pole 3A/5A, 1 form A (NO) contact
- Sensitive coil 200mW
- Ambient temperature 85°C
- RoHS compliant (Directive 2002/95/EC)
- Coil UL class F (155) Insulation System





Typical applications
Home appliances



Approvals
VDE 40026866, UL E58304
Technical data of approved types on request

Contact Data	
Contact arrangement	1 form A (NO)
Rated voltage	250VAC
Max. switching voltage	30VDC, 277VAC
Rated current	3A/5A
Switching power	1,250VA, 150W
Contact material	AgNi
Min. recommended contact load	100mA, 5VDC
Initial contact resistance	100mΩ at 1A, 6VDC
Frequency of operation, with/without load	1800/18000h ⁻¹
Operate/release time max.	10ms
Electrical endurance	
EJ00 (3A): 3A, 250VAC, resistive:	100x10 ³ ops.
EJ05 (5A): 5A, 250VAC, resistive:	100x10 ³ ops


Electrical endurance

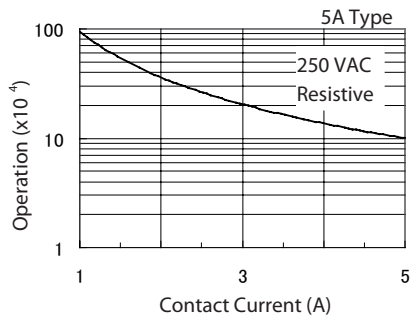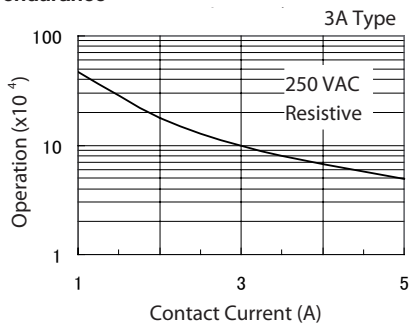

Contact Data (continued)

Type	Contact	Load	Cycles
IEC 61810			
EJ	form A (NO)	5A,250VAC, cosφ=1, 85°C	100x10 ³
EJ	form A (NO)	2A,250VAC, cosφ=1, 85°C	100x10 ³
EJ	form A (NO)	3A,250VAC, cosφ=1, 105°C	250x10 ³
UL 508			
EJ	form A (NO)	3A,277VAC, cosφ=1, 85°C	50x10 ³
Mechanical endurance		>5x10 ⁶ operations	

Operate time

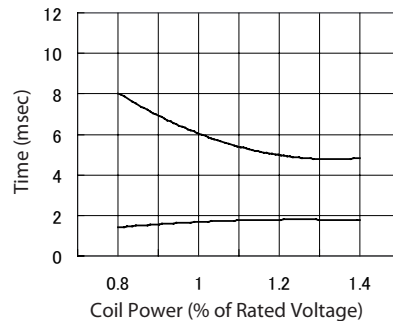

Coil Data

Coil voltage range	3 to 24VDC
Coil insulation system according UL	class 155 (F)

Coil versions, DC coil


Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
003	3	2.25	0.3	45	200
005	5	3.75	0.5	125	200
006	6	4.50	0.6	180	200
009	9	6.75	0.9	405	200
012	12	9.00	1.2	720	200
018	18	13.50	1.8	1620	200
024	24	18.00	2.4	2890	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Miniature PCB Relay EJ (Continued)

Contact data (continued)

Coil operative range

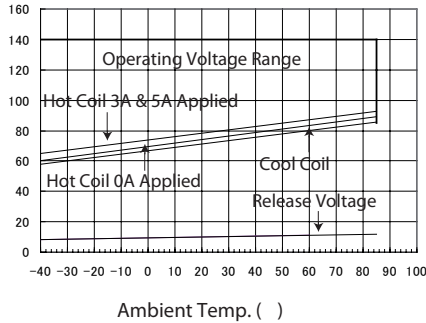

Insulation Data

Initial dielectric strength	
between open contacts	750V _{rms}
between contact and coil	4000V _{rms}
Initial surge withstand voltage	
between contact and coil	10000V
Initial insulation resistance	1000MΩ
Clearance/creepage	
between contact and coil	≥ 3/4mm


Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

Ambient temperature	-40 to 85°C
Category of environmental protection	IEC 61810
	RTII - flux proof, RTIII - wash tight
Vibration resistance (functional)	10 to 50Hz, 1.5mm double amplitude
Shock resistance (functional)	IEC 60068-2-27 (half sine)
	98m/s ² , 11ms
Terminal type	PCB-THT
Weight	4g
Resistance to soldering heat THT	IEC 60068-2-20
	260°C/5s
Packaging/unit	box/1000 pcs.


Terminal assignment

Bottom view on solder pins



PCB layout

Bottom view on solder pins

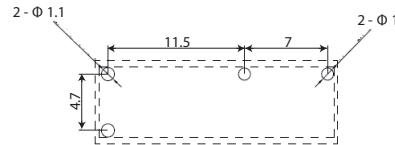

Dimensions

