THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	RELEASED ECR-05-001438	05APR05	J.Z	I.E

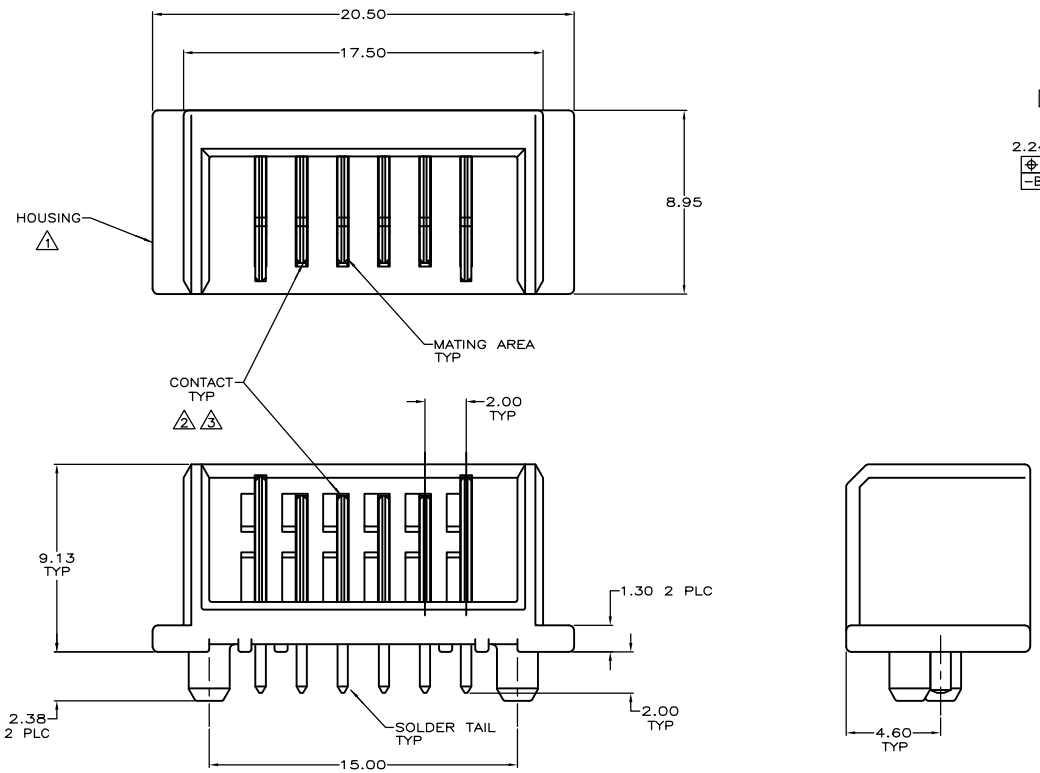

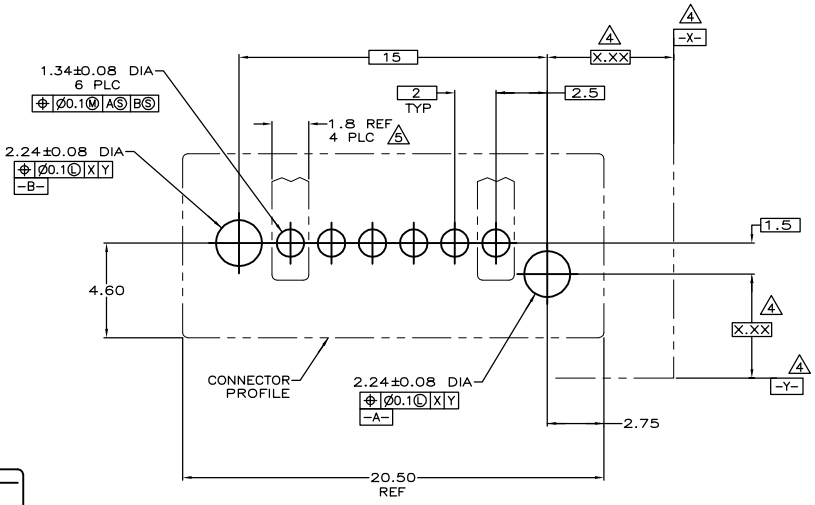

P.C. BOARD MOUNTING DIMENSIONS

1. HOUSING: SPS, UL 94V-0 RATED, BLACK.
2. CONTACT: BRASS.
3. .076um MINIMUM GOLD OVER 0.76um MINIMUM PALLADIUM NICKEL ON MATING AREA, 3.80um MINIMUM TIN ON SOLDER TAIL, ALL OVER 1.27 um MINIMUM NICKEL.
4. DATUMS AND DIMENSIONS ESTABLISHED BY CUSTOMER.
5. RECOMMENDED MINIMUM TRACE WIDTH FOR END POSITIONS WHEN CARRYING 3 AMPS: 1.8 WIDE x 55um THICK, BOTH SIDES.

5787531-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 2
FINISH 3

DWN	R.S.KLINE	07-05-95
CHK	R.S.KLINE	07-11-95
APVD	R.S.KLINE	07-11-95
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

CUSTOMER DRAWING

Tyco Electronics Corporation
Shanghai PRC

NAME: HEADER ASSY, 6 POSN, SEQUENCED, MDI

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5787531	–

SCALE 8:1 SHEET 1 OF 1 REV 0

AMP 4805 REV 31MAR2000

M:\Battery_Lead-free\Wave-Solder\787531\Lead-free\C-5787531_0.dwg