


P	LTR	DESCRIPTION	DATE	DWN	APVD
S1		REVISED PER ECO-15-008427	08JUN15	JR	DH

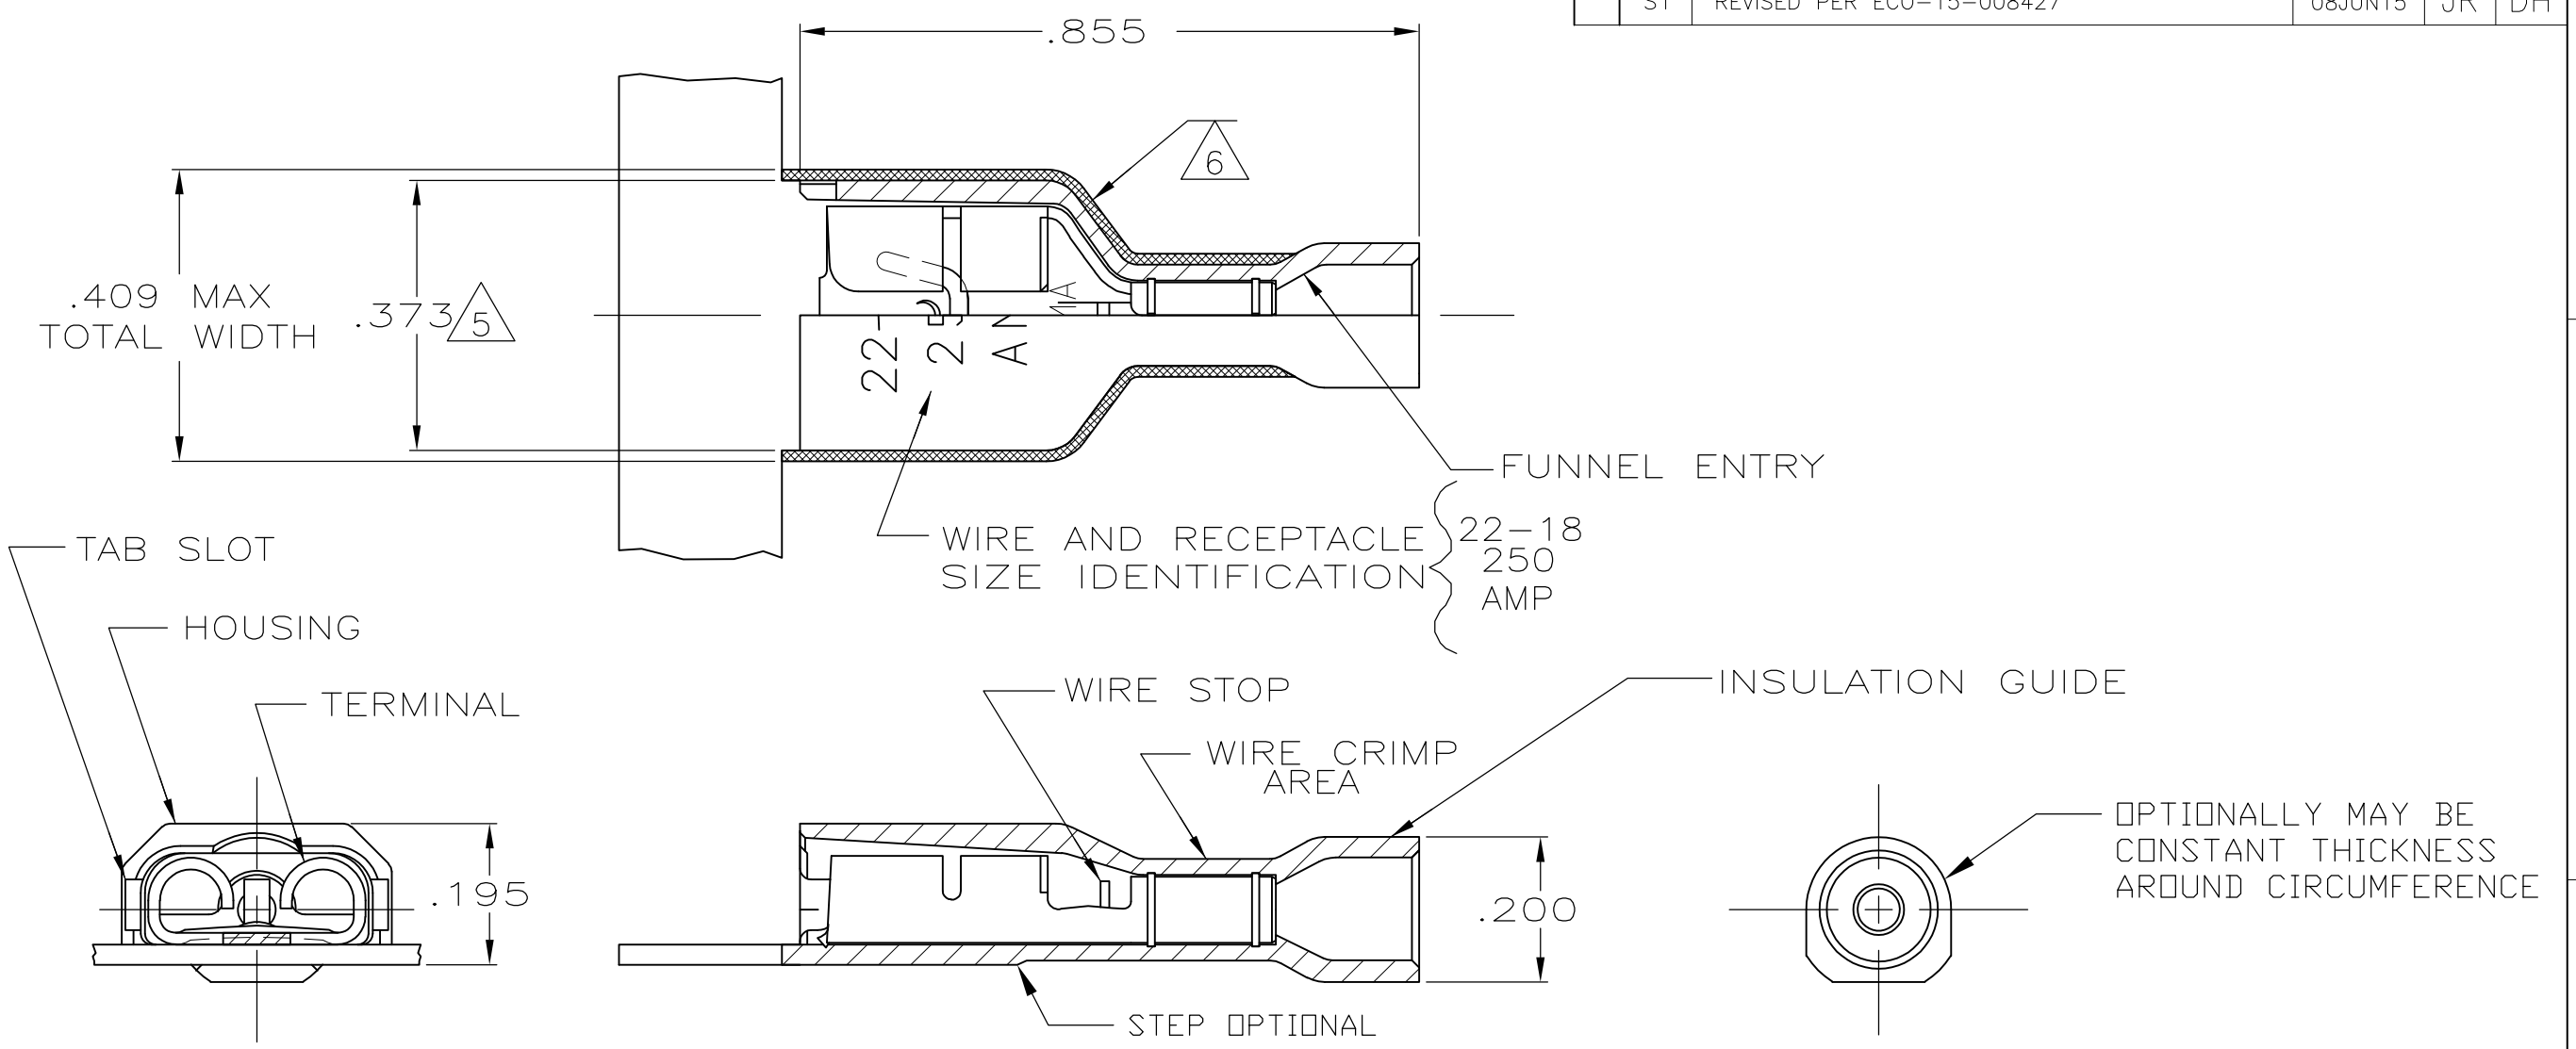

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

STANDARD	HOUSING:NYLON,COLOR-BLACK TRANSLUCENT RECEPTACLE:BRASS, TIN	9-520183-2
BULK	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN	5-520183-2
STANDARD	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:#3 HARD PH BRONZE, TIN	2-520183-4
	HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN	2-520183-2
PACKAGING	MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: P FORTNEY 10/18/88	STE TE Connectivity	
		CHK: JR RUTH 10/18/88		
APVD: K RANDOLPH 10/21/88		NAME: RECEPTACLE ASSY,ULTRA-FAST, .250 SERIES,22-18 AWG		
DIMENSIONS: INCHES		PRODUCT SPEC: 108-2043		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC: 114-2123		
MATERIAL: SEE TABLE		WEIGHT: -		
FINISH: SEE TABLE		SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-520183 RESTRICTED TO: -		
CUSTOMER DRAWING		SCALE: 4:1 SHEET: 1 OF 1 REV: S1		