


COIL: @ +25 °C
 RESISTANCE 160 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 7.2 VDC
 MUST RELEASE 0.7 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -24 VDC WITH BIFILAR COIL

CUSTOMER DATA SHEET

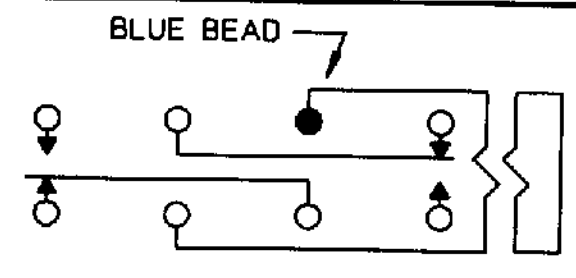

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/1/91 CK. *V. J. [Signature]*



CUST. QPL
 CUST. NO. M39016/22-016M

TYPE "HMB" RELAY

HMB1201G01M