

COIL: @ 25°C	
RESISTANCE	7600 OHMS ± 10%
NOMINAL VOLTAGE	120.0 VDC
MUST OPERATE	65.0 VDC
MUST RELEASE	7.7 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
 OPERATE BOUNCE 5 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

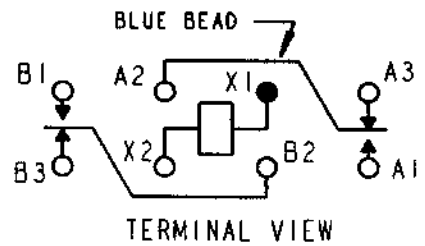

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. R.B. 5/19/92 CK. TLG 8-17-01

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/23-036 REV. _____

"07" RELAY

B07D932BE2-0352