


Wiha ESD Safe Pliers & Cutters

Precision Cutters Wide Tapered Head

Bevel





32706 Precision Cutters, Wide Tapered Head, Bevel
Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32706	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.4	11.0mm	1	.20



Precision Cutters Wide Tapered Head

Flush

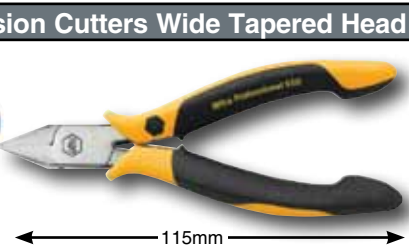


32708 Precision Cutters, Wide Tapered Head, Flush
Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32708	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.2	11.0mm	1	.19



Precision Cutters Wide Tapered Head

Full Flush




32710 Precision Cutters, Wide Tapered Head, Full Flush
Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32710	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.0	11.0mm	1	.23



Precision Cutters Wide Tapered Head

Flush




32711 Precision Cutters, Wide Tapered Head With Wire Trapping Device, Flush
Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32711	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.2	11.0mm	1	.19



Precision Cutters Slim Oval Form

Flush



32712 Precision Cutters, Slim Oval Head, Flush
Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

#32712	mm	Inch	Copper	Head Wdth	Pkg.	lbs.
	115	4.5	1.0	10.5mm	1	.23

