


1. SPECIFICATION



AR-20150AA-2W (RoHS)

ITEM		SPECIFICATIONS
01	Type	Dynamic 20mm receiver unit
02	SENSITIVITY (S.P.L)	92 dB \pm 3 dB at 1KHz 100mV with IEC318 coupler.
03	Impedance	150 Ω \pm 15% at 1.0 KHz
04	Frequency Range	100 – 10K Hz
05	Rated Input Power	30 m W
06	Max. Input Power	50 m W
07	Total Harmonics Distortion	Max 5% at 1 KHz, 100 mV.

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

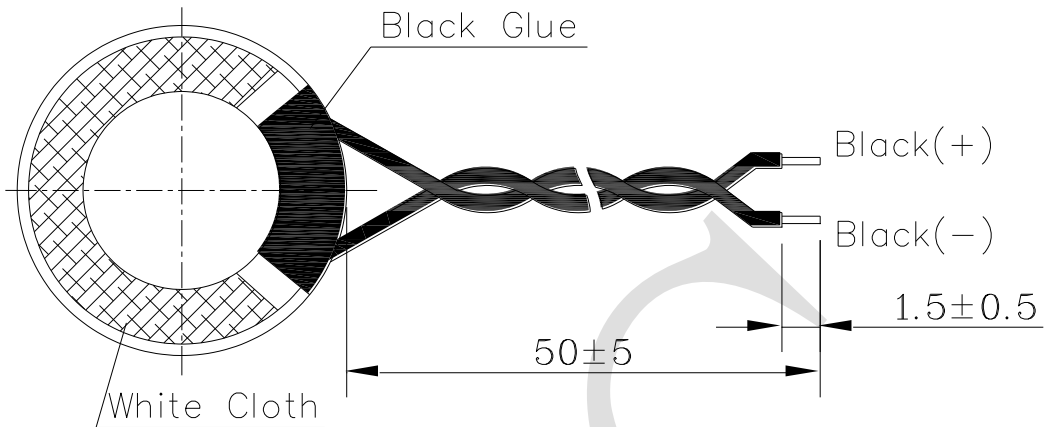

Wire: UL1571, 30AWG

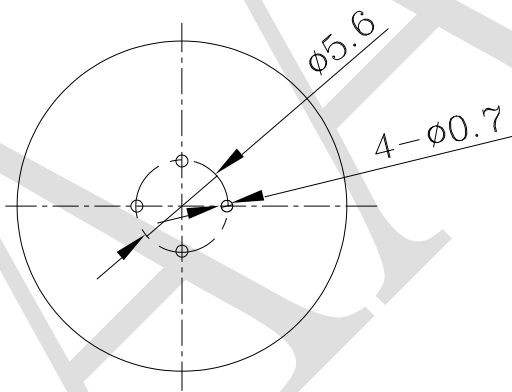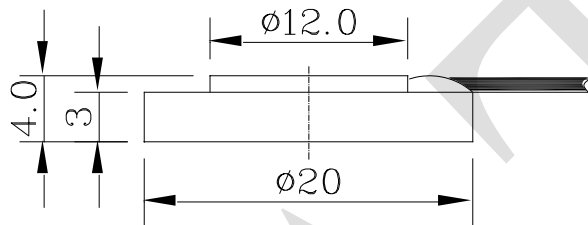

RoHS

TITLE: DYNAMIC RECEIVER		DRAWN: Jason	2011/08/23	SCALE: 3:1	SHEET: 1 of 1
PART NO. AR-20150AA-2W		DESIGNED: R & D OF AAT		UNITS: mm	
DWG NO. HS-110823		CHECKED:		TOLERANCE ± 0.5	
		APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
	2	MATERIAL: ABS		ONE PLACE DECIMAL ± ***	
	REV			TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	



苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:

Click to view products by [AATC](#) manufacturer:

Other Similar products are found below :

[02-810.001](#) [03-810.001](#) [12320055](#) [1.30.249.001/0000](#) [13400075](#) [14015050](#) [14015060](#) [14095050](#) [14095060](#) [14-810.002](#) [14-810.902](#) [14-810.910](#) [14-810.918](#) [1602AC-23-18E-26.000000G](#) [19-401C](#) [1SFA619600R6206](#) [1SFA619600R6306](#) [20000-81](#) [20000-82](#) [20000-83](#) [20000-84](#) [20410075](#) [204364](#) [204382](#) [204407](#) [204434](#) [204436](#) [204507](#) [204540](#) [204570](#) [204588](#) [204627](#) [204646](#) [204678](#) [204697](#) [204717](#) [204720](#) [204735](#) [204738](#) [204815](#) [204835](#) [204955](#) [204994](#) [205047](#) [205101](#) [205311](#) [212410](#) [254-15210-ROX](#) [254-20205-ROX](#) [254-20C6-ROX](#)